

CURRENT TRANSFORMER

Model 3P9

Window Size 1.25" X 0.25"

Full Radius

APPLICATION:
3 phase relaying
and motor overload.

FREQUENCY:
50-400 Hz.



INSULATION LEVEL:
600 Volt, 10 kV BIL full wave.

REGULATORY AGENCY APPROVALS




Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by UL in accordance with EC 44-1



- Secondary leads are UL 1015, 105°C., CSA approved, No. 16 AWG, 24" long.
- Approximate weight 6 lbs.

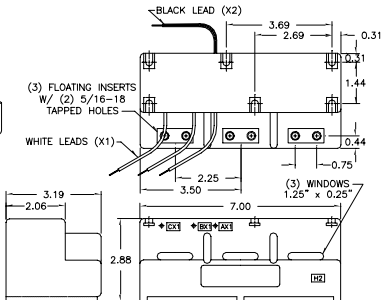

(2) TRAPPED MOUNTING INSERTS
5/16-18



CAUTION: Maximum torque on mounting inserts is 75 inch-pounds. DO NOT OVERTIGHTEN.

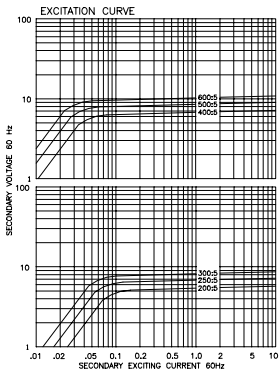

| CATALOG NUMBER | CURRENT RATIO | VA FOR ±1% CLASS | SECONDARY WINDING RESISTANCE @75°C. |
|----------------|---------------|------------------|-------------------------------------|
| 3P9-201 | 200:5 | 12.5 | 0.062 |
| 3P9-251 | 250:5 | 15.0 | 0.077 |
| 3P9-301 | 300:5 | 20.0 | 0.092 |
| 3P9-401 | 400:5 | 12.5 | 0.117 |
| 3P9-501 | 500:5 | 15.0 | 0.146 |
| 3P9-601 | 600:5 | 20.0 | 0.176 |