

# Model 139MR

## Current Transformer Multi-Ratio Window Diameter 6.50"

### Application

Relaying.

Terminals are brass screws No. 10-32 with one flatwasher and lockwasher.

### Frequency

50-400 Hz.

Order mounting bracket kit 0221B01528 separately.

### Insulation Level

600 Volt, 10 kV BIL full wave.

Approximate weight 40 lbs.






### Model 139MR

Catalog Number	Relay Class	Continuous Thermal Rating Factor	
		@ 30 °C	@ 55 °C
139-601MR	C100	2.0	2.0
139-122MR	C200	1.5	1.33
139-202MR	C200	1.5	1.33
139-302MR	C400	1.33	1.0
139-402MR	C200	1.0	0.8
139-502MR	C400	1.0	0.8


REGULATORY AGENCY APPROVALS

Manufactured to meet the requirements of ANSI/IEEE C57.13. Classified by U.L. in accordance with IEC 44-1

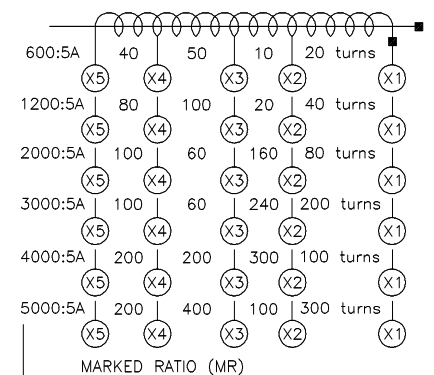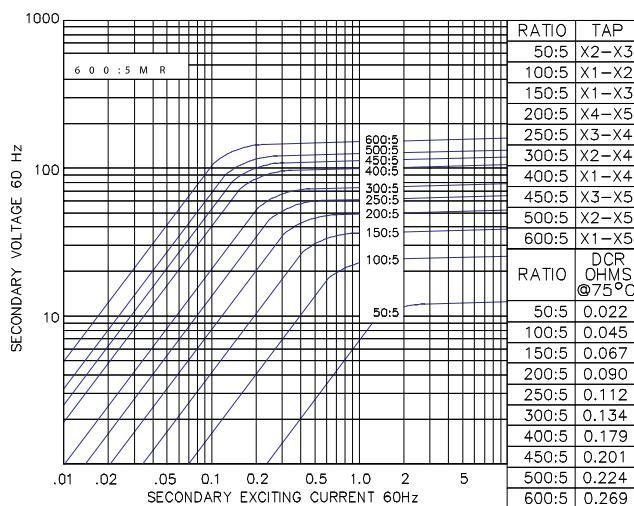


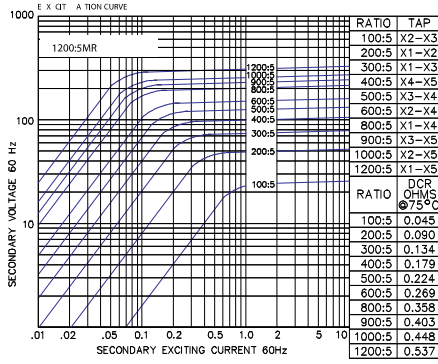


Model 139-122MR

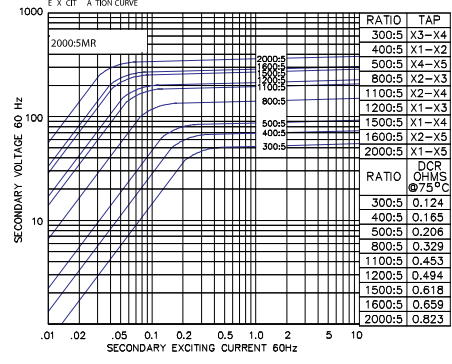


Model 139-202MR

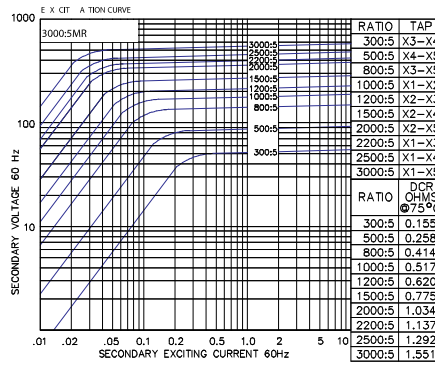


Model 139-302MR

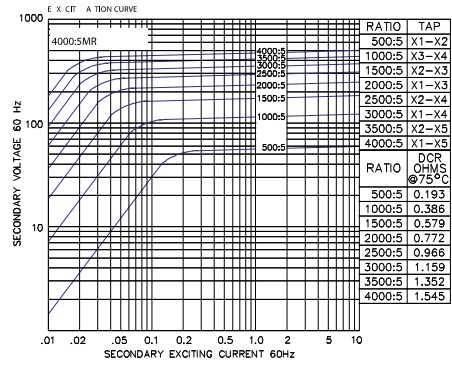

Model 139-402MR

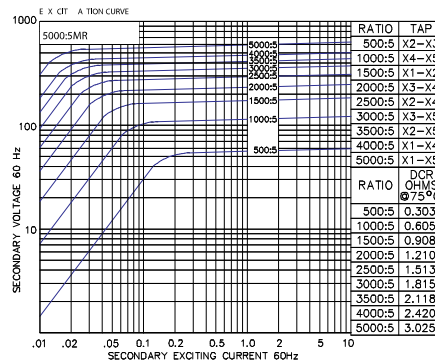

Model 139-502MR

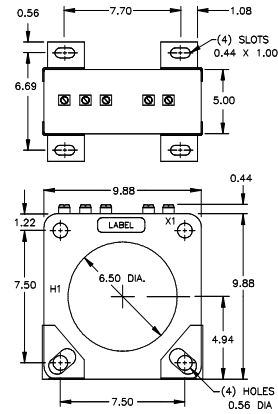

[GEGridSolutions.com](http://GEGridSolutions.com)

Grid-AIS-L4-ITL\_Model\_139MR-1249-2017\_05-EN. © Copyright 2017, General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

**Worldwide Contact Center**

Web: [www.GEGridSolutions.com/contact](http://www.GEGridSolutions.com/contact)

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

