CURRENT TRANSFORMER

MODEL 562

Window Size 4.00"X 5.38"

APPLICATION:
Metering.

FREQUENCY:
50–400 Hz.

INSULATION LEVEL:
0.6 kV, BIL 10 kV full wave.

INSULATION SYSTEM:
Temperature Class H (180°C.)

CONTINUOUS THERMAL RATING FACTOR:
1.33 at 30°C. amb.
1.0 at 55°C. amb.

- Terminals are brass studs No. 10–32 with one flatwasher, lockwasher and regular nut.
- Approximate weight 8 lbs.

REGULATORY AGENCY APPROVALS

E93779 LR89403

Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44–1
Approved for revenue metering by Industry Canada. No. AE–0659

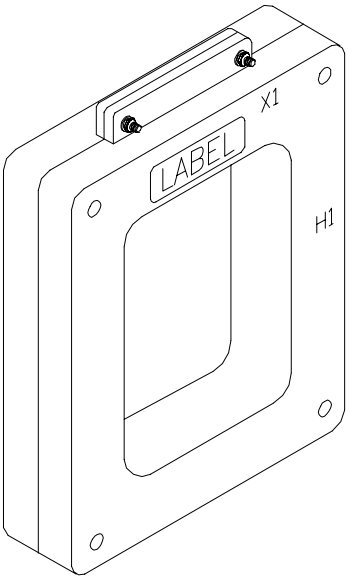

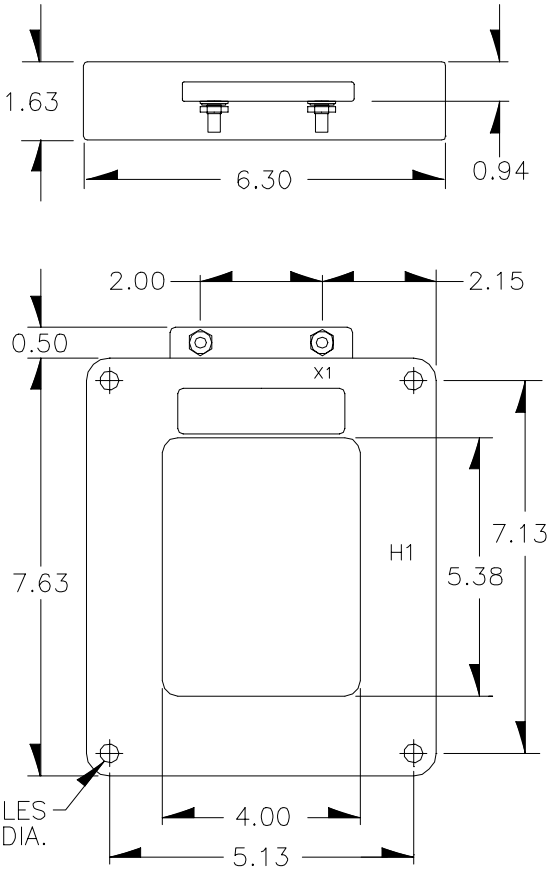

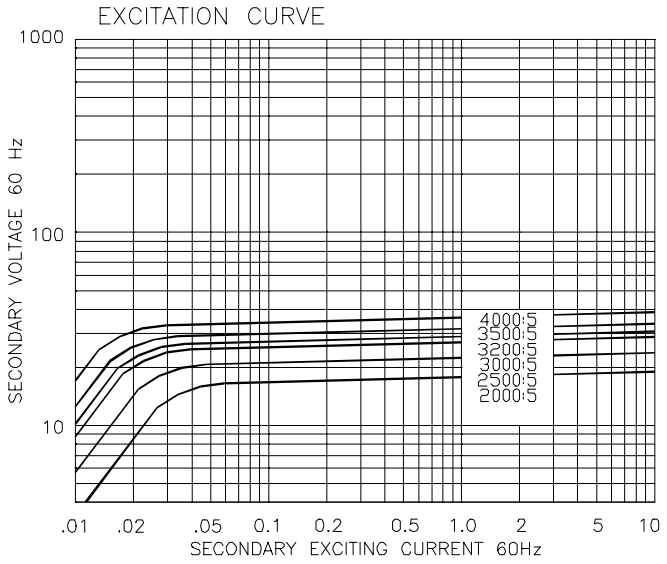

CATALOG NUMBER	CURRENT RATIO	ANSI METERING CLASS AT 60 Hz					SECONDARY WINDING RESISTANCE (OHMS @ 75°C.)
		B0.1	B0.2	B0.5	B0.9	B1.8	
562–202	2000:5	0.3	0.3	0.3	0.6	0.6	0.345
562–252	2500:5	0.3	0.3	0.3	0.3	0.6	0.431
562–302	3000:5	0.3	0.3	0.3	0.3	0.6	0.517
562–322	3200:5	0.3	0.3	0.3	0.3	0.6	0.552
562–352	3500:5	0.3	0.3	0.3	0.3	0.3	0.604
562–402	4000:5	0.3	0.3	0.3	0.3	0.3	0.600