CURRENT TRANSFORMER

MODEL 563

Window Size 4.00"X 5.38"

APPLICATION:
Relaying and metering.

FREQUENCY:
50–400 Hz.

INSULATION LEVEL:
0.6 kV, BIL 10 kV full wave.

INSULATION SYSTEM:
Temperature Class H (180°C.)

CONTINUOUS THERMAL RATING FACTOR:
1.33 at 30°C. amb.
1.0 at 55°C. amb.

- Terminals are brass studs No. 10–32 with one flatwasher, lockwasher and regular nut.
- Approximate weight 12 lbs.

REGULATORY AGENCY APPROVALS

E93779 LR89403

Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44–1

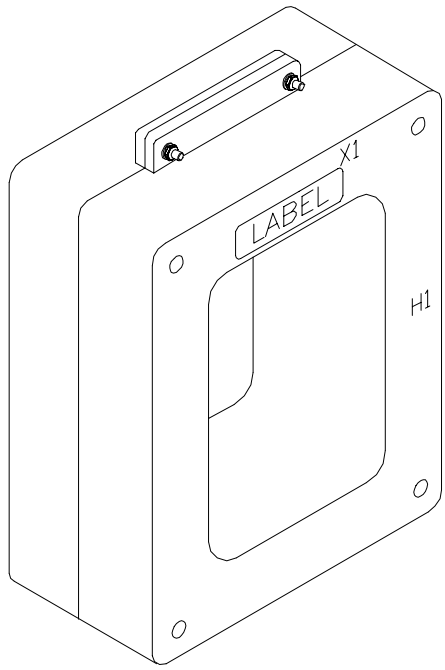

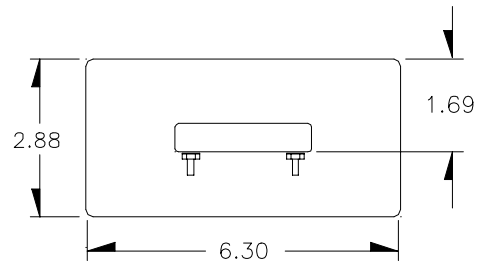

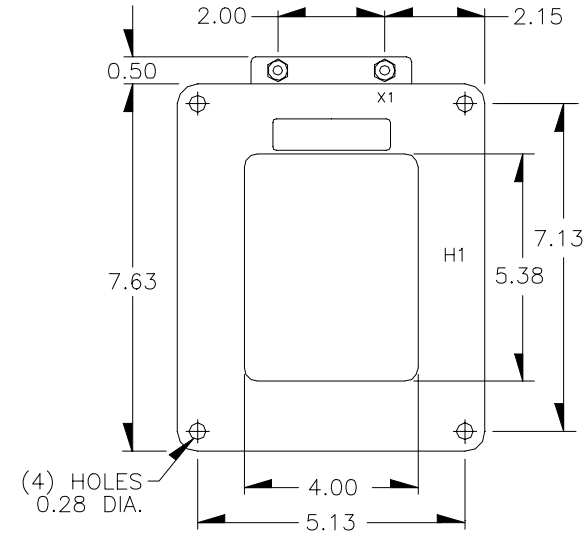

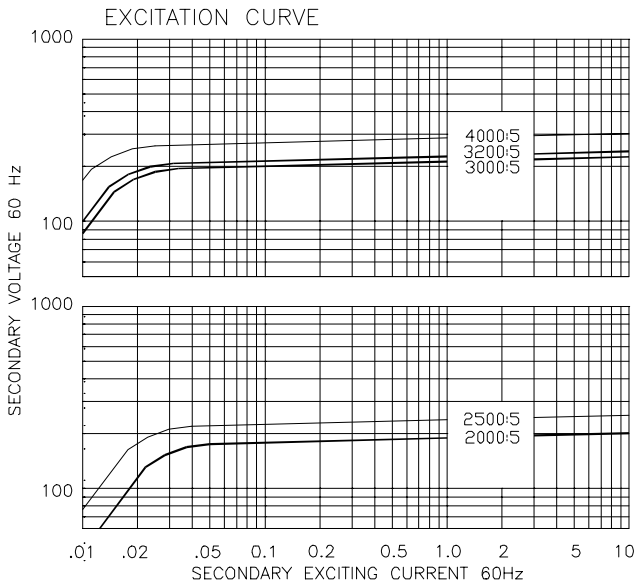

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60 Hz					SECONDARY WINDING RESISTANCE (OHMS @ 75°C.)
			B0.1	B0.2	B0.5	B0.9	B1.8	
563–202	2000:5	C50	0.3	0.3	0.3	0.3	0.3	0.995
563–252	2500:5	C50	0.3	0.3	0.3	0.3	0.3	1.244
563–302	3000:5	C20	0.3	0.3	0.3	0.3	0.3	1.382
563–322	3200:5	C20	0.3	0.3	0.3	0.3	0.3	1.474
563–402	4000:5	C20	0.3	0.3	0.3	0.3	0.3	1.842