CURRENT TRANSFORMER

Model 571

Window Size 3.58" X 4.13"

APPLICATION:
Metering.

FREQUENCY:
50–400 Hz.

INSULATION LEVEL:
0.6 kV, BIL 10 kV full wave.

CONTINUOUS THERMAL RATING FACTOR:
1.33 at 30°C. amb.
1.0 at 55°C. amb.

- Terminals are brass studs No. 10–32 with one flatwasher, lockwasher and regular nut.
- Approximate weight 4 lbs.

REGULATORY AGENCY APPROVALS

E93779 LR89403

Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44–1

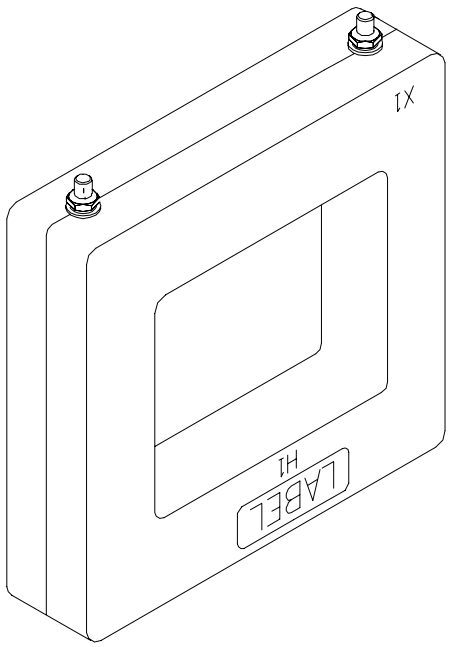

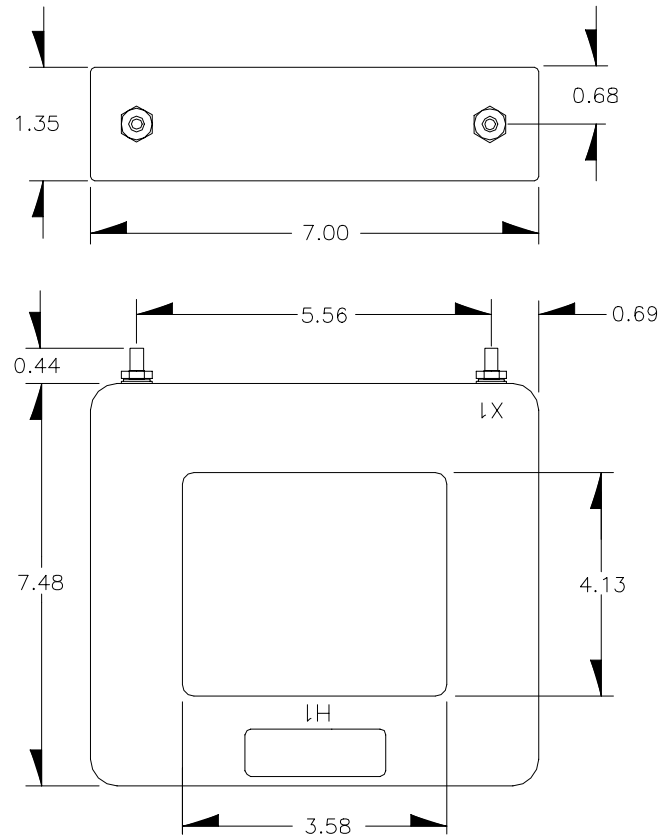

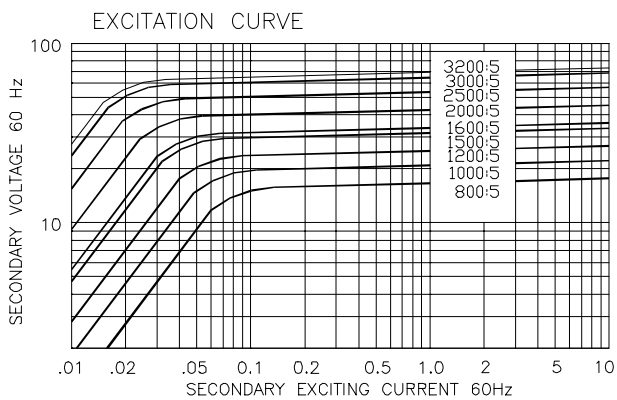

CATALOG NUMBER	CURRENT RATIO	ANSI METERING CLASS AT 60 Hz					SECONDARY WINDING RESISTANCE (OHMS @ 75°C.)
		B0.1	B0.2	B0.5	B0.9	B1.8	
571–801	800:5	0.6	0.6	0.6	1.2	2.4	0.143
571–102	1000:5	0.3	0.3	0.6	0.6	1.2	0.179
571–122	1200:5	0.3	0.3	0.6	0.6	1.2	0.215
571–152	1500:5	0.3	0.3	0.3	0.6	0.6	0.337
571–162	1600:5	0.3	0.3	0.3	0.6	0.6	0.360
571–202	2000:5	0.3	0.3	0.3	0.3	0.6	0.497
571–252	2500:5	0.3	0.3	0.3	0.3	0.3	0.622
571–302	3000:5	0.3	0.3	0.3	0.3	0.3	0.746
571–322	3200:5	0.3	0.3	0.3	0.3	0.3	0.872