

CURRENT TRANSFORMER

Model 574

Window Size 0.75" X 2.25"



APPLICATION:
Metering.

FREQUENCY:
50-400 Hz.


INSULATION LEVEL:
0.6 kv, BIL 10 kv full wave.
CONTINUOUS THERMAL
RATING FACTOR:
1.33 at 30°C. amb.
1.0 at 55°C. amb.

- Terminals are brass studs No. 10-32 with one flatwasher, lockwasher and regular nut.
- Approximate weight 2.5 lbs.

REGULATORY AGENCY APPROVALS
 E93779  LR89403
 Manufactured to meet the requirements of ANSI/IEEE C57.13.
 Classified by UL in accordance with EC 14-1

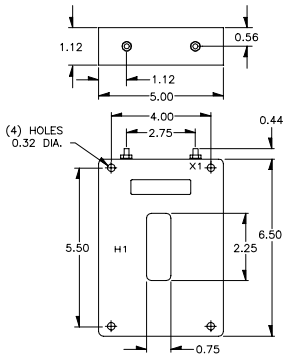

EXCITATION CURVE



CATALOG NUMBER	CURRENT RATIO	ANSI METERING CLASS AT 60 Hz		SECONDARY WINDING RESISTANCE
		Bo.1	Bo.2	
574-101	100:5	2.4	2.4	0.032
574-151	150:5	1.2	2.4	0.055
574-201	200:5	1.2	1.2	0.067
574-251	250:5	0.6	1.2	0.094
574-301	300:5	0.6	0.6	0.101
574-401	400:5	0.6	0.6	0.212
574-501	500:5	0.6	0.6	0.265
574-601	600:5	0.6	0.6	0.319
574-801	800:5	0.3	0.3	0.425