

CONTROL POWER TRANSFORMER

Model CPT3-60-2

REGULATORY AGENCY APPROVALS



APPLICATION:

To provide control power in distribution equipment and motor starters.

FREQUENCY:

See below.



INSULATION LEVEL:

5 kV, 60 kV BIL full wave.




THERMAL RATING:

At 30°C. amb., see below.


- Primary terminals are brass screws No. 10-32 with one flatwasher and lockwasher.
- Secondary terminals are brass screws 10-32 with one flatwasher and lockwasher.
- The transformer winding is vacuum encapsulated in polyurethane resin.
- Plated steel mounting base.
- For indoor use.
- Approximate weight 63 lbs.

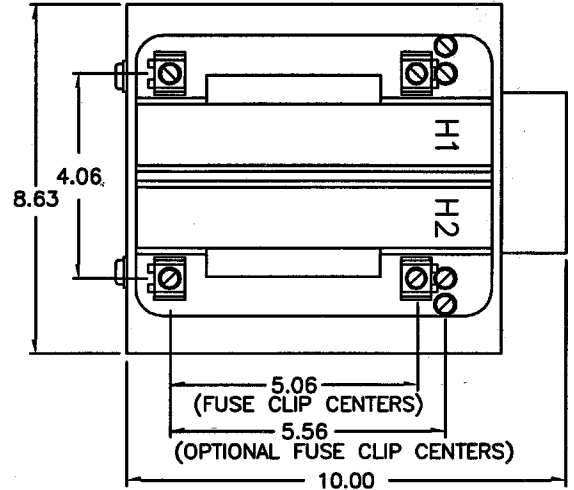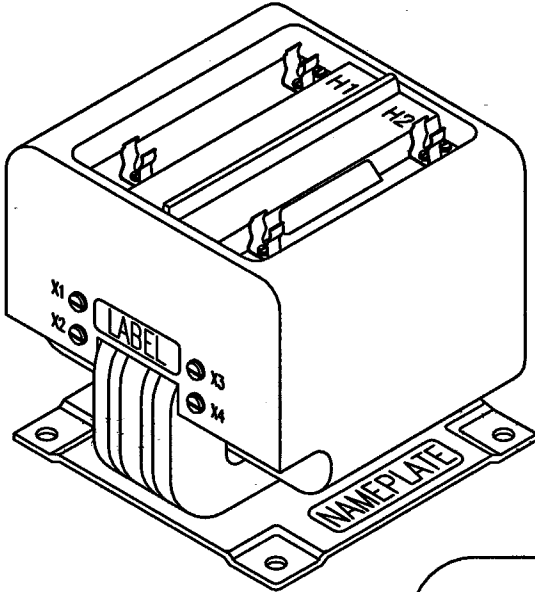

CONNECTION DIAGRAM

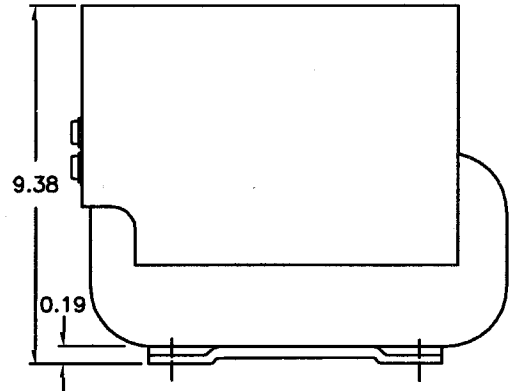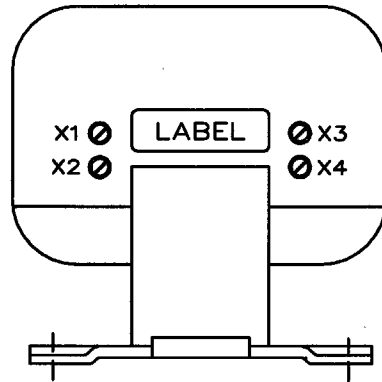

(4) HOLES
0.41 DIA.

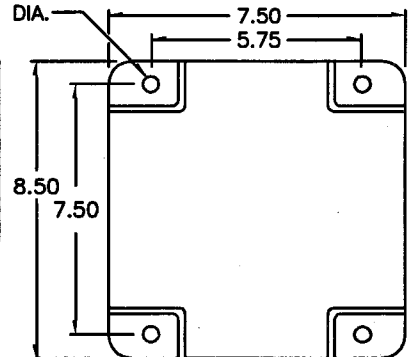

BASE PLATE

*CATALOG NO.	PRIMARY VOLTAGE	RATIO	SECONDARY VOLTAGE	FREQUENCY	THERMAL RATING	PRIMARY FUSE
CPT3-60-2-242FF	2400V	20:1	120/240V	60Hz	2.0kVA	3E
CPT3-60-2-332FF	3300V	30:1	110/220V	50Hz	1.8kVA	3E
CPT3-60-2-4161FF	4160V	34.7:1	120/240V	60Hz	2.0kVA	2E
CPT3-60-2-482FF	4800V	40:1	120/240V	60Hz	2.0kVA	2E

*For fuse clips only, change FF to CC.