

## Model 5241 Power Amplifier

### DESCRIPTION

The Model 5241 is a voltage-controlled power amplifier designed exclusively for Magtrol's Model HD-825 Hysteresis Dynamometer. Because of its double braking system, the HD-825 requires more than 4 amps of power in order to reach full torque. The 5241 (which can provide up to 5 amps of output current) is necessary in order to amplify the power between a 6200 or DSP6001 Controller (which both have a maximum current output of 1 amp) and the HD-825 Dynamometer.

### ORDERING INFORMATION

If the HD-825 is purchased without a dynamometer controller, please inform Magtrol of your controller model—as it may be necessary to modify your existing controller so that it functions properly with the 5241 Power Amplifier.



front panel




rear panel

### SPECIFICATIONS

ELECTRICAL CHARACTERISTICS	
Current Output	0 to 5 A DC
Control Input	0 to +3 V DC or 0 to -10 V DC
Fuses (5 × 20 mm)	Brake: UL/CSA 6.3 A 125 V SB IEC 5 A 250 V T
	Power (120 V): UL/CSA 3 A 250 V SB Power (240 V): IEC 1.25 A 250 V T
Power Requirements	330 VA
Voltage Requirements	120/240 V 60/50 Hz

DIMENSIONS		
Width	19.00 in	483 mm
Height	5.20 in	133 mm
Depth	14.74 in	375 mm
Depth with handles	16.38 in	416 mm
Weight	29.66 lb	13.45 kg

### SYSTEM CONFIGURATION

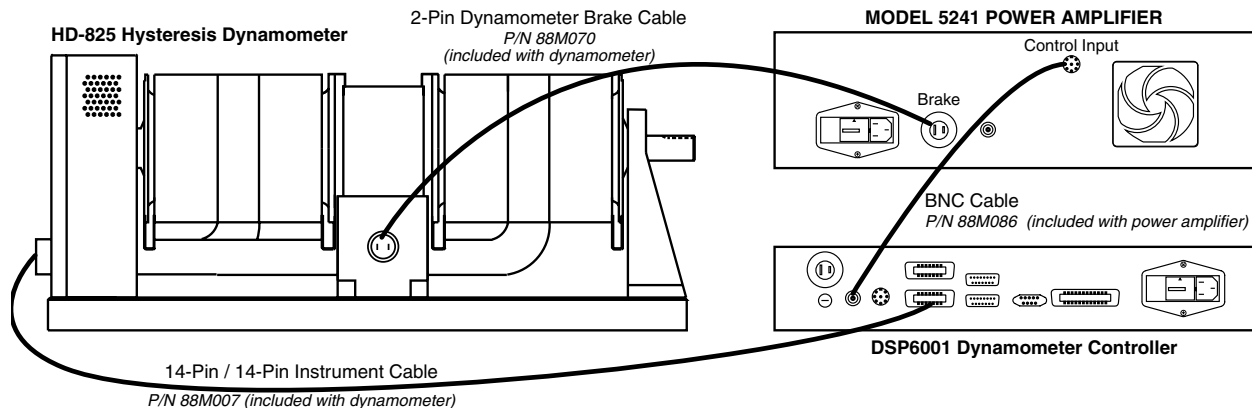

5241-US www.11/04



**MAGTROL INC**  
70 Gardenville Parkway  
Buffalo, New York 14224 USA  
Phone: +1 716 668 5555  
Fax: +1 716 668 8705  
E-mail: magtrol@magtrol.com

**MAGTROL SA**  
Route de Moncor 4B  
1701 Fribourg, Switzerland  
Phone: +41 (0)26 407 3000  
Fax: +41 (0)26 407 3001  
E-mail: magtrol@magtrol.ch

[www.magtrol.com](http://www.magtrol.com)

Subsidiaries in:

- Germany
- France
- Great Britain

Worldwide Network  
of Sales Agents

Magtrol SA ISO 9001:2000 certified

