
CST 113

Signal Converter I/U and I/I

FEATURES

- Signal converter to be used with Magtrol DI Series Contactless Displacement Transducers as well as with LE Series Load Measuring Pins
- Wide number of possibilities to select functions (polarity) and signal ranges (offset and gain)
- Fast calibration in one displacement, with independent settings
- Transducer supply current up to 80 mA
- Outputs: 0 to ± 10 VDC, 0 to 20 mA (4 to 20 mA) or ± 10 to 0 VDC, 20 to 0 mA (20 to 4 mA)
- Available with either a plastic housing, for mounting on a DIN rail, or housed in aluminum IP 65



DESCRIPTION


The CST 113 is a signal converter for transducers delivering a signal of 4 to 20 mA. The converter output can be chosen as follows: a voltage-based signal (I/U conversion) or a current-based signal (I/I), either with signal inversion if required. A wide variety of offset and gain values can be selected, matching many different applications. The use of micro switches (DIP switches) and potentiometers enable easy on-site adjustments and the independent settings make it possible to calibrate the CST 113 in one displacement, from the minimal to the maximum position of the jack.


A “transmission OK” output enables the electrical connection between the DI transducer and the CST 113 Converter to be

checked, thus allowing the system to be used in applications where safety is important. This operation is simply carried out by measuring the current coming from the DI transducer. An anomaly is indicated by the opening of the output transistor.

The CST 113 power supply input features a galvanic separation to electrically isolate the power supply ground from the measuring chain ground. The CST 113 circuitry is located in a plastic housing which can be mounted on a DIN EN 20022 - EN 50035 rail or fixed in an aluminium housing.

SYSTEM CONFIGURATION

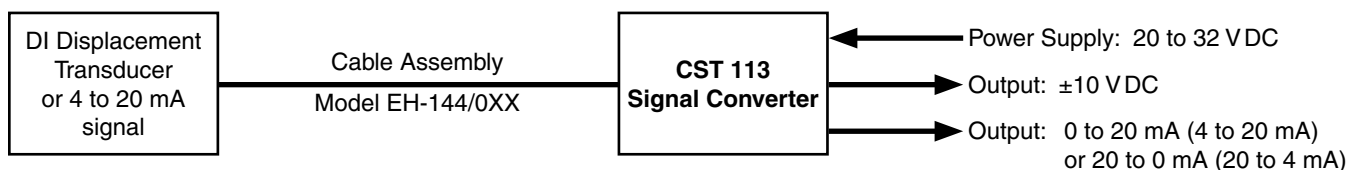

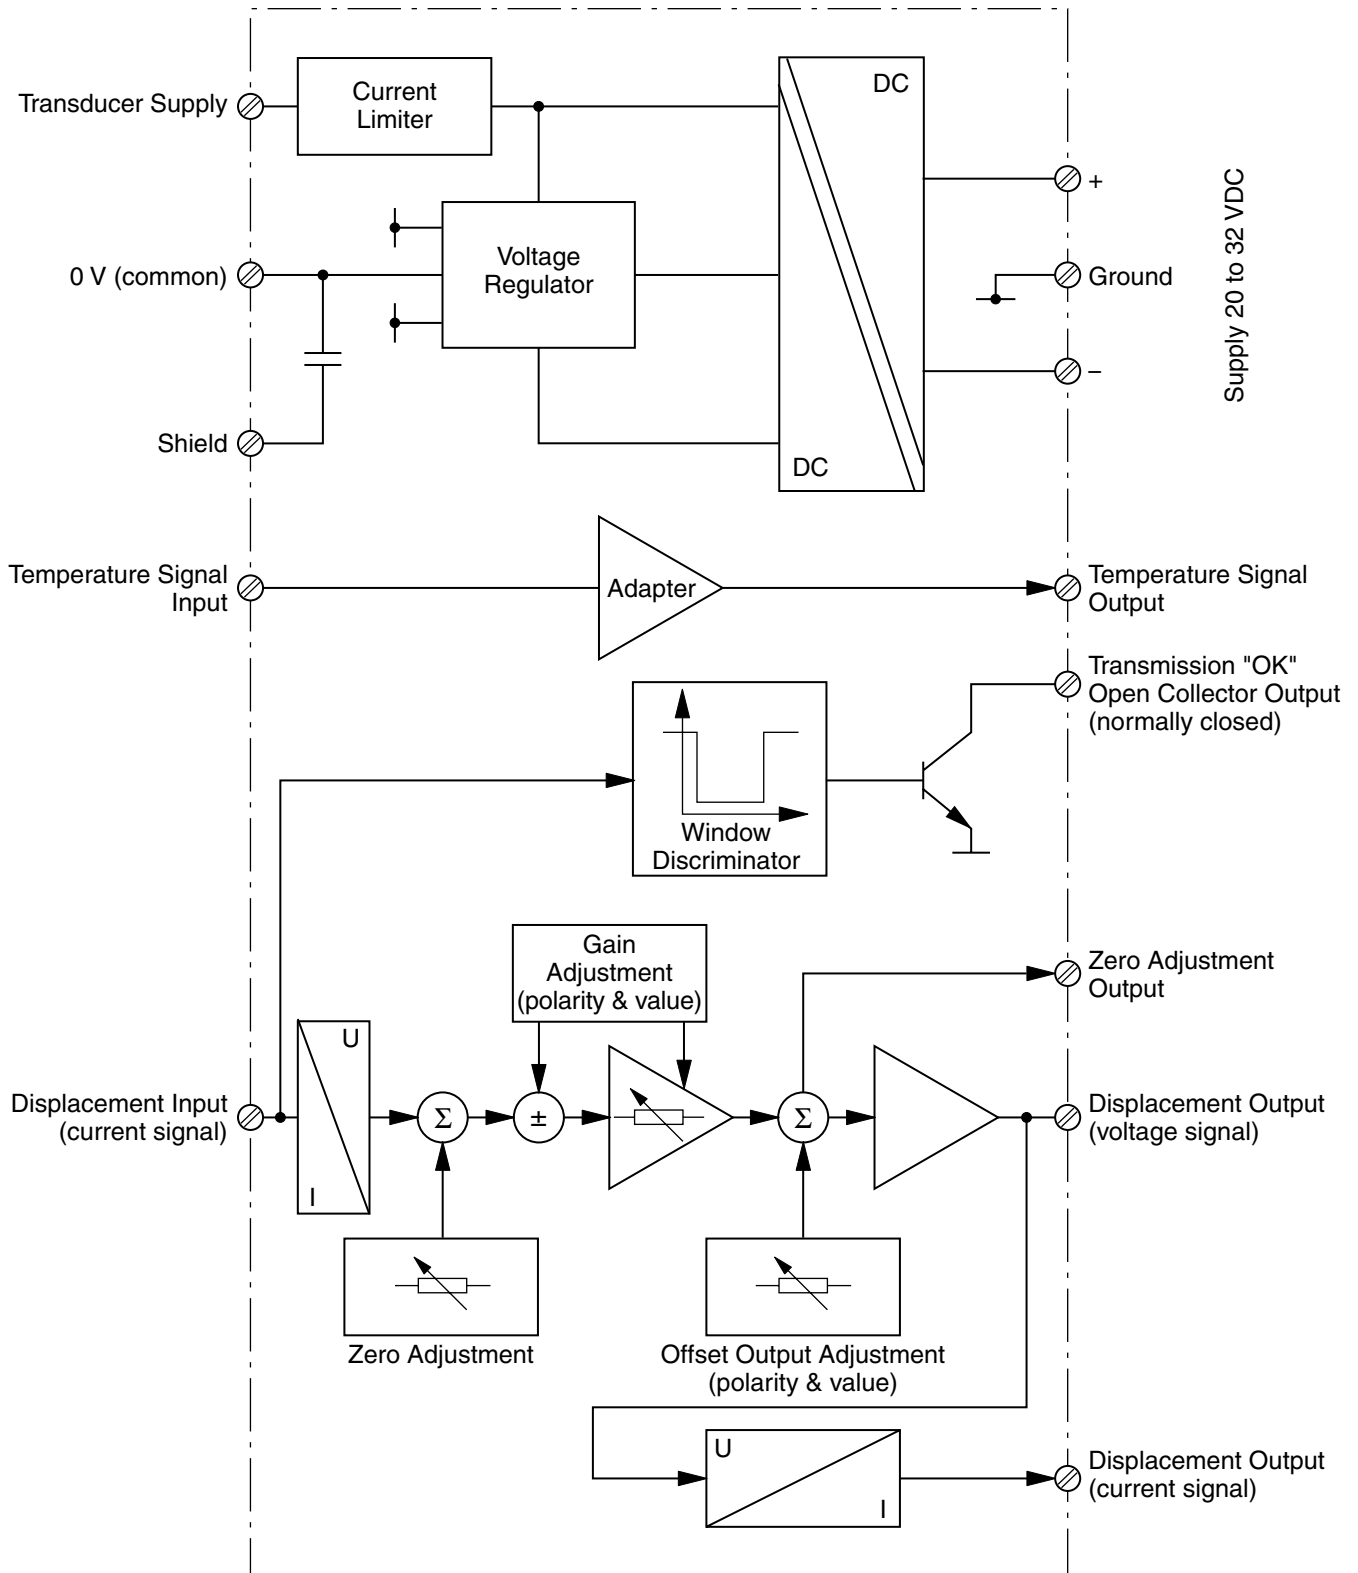


CONVERTER SUPPLY	
Voltage	20 to 32 VDC (galvanic separation between supply input and circuit)
Current	< 200 mA
TRANSDUCER SUPPLY	
Voltage	24 V \pm 1 V
Current	80 mA max.
INPUT SIGNALS	
Displacement Signal	4 to 20 mA nominal 2 to 22 mA max.
Temperature Signal	0 to 10 VDC
OUTPUT SIGNALS	
Displacement Voltage Signal <ul style="list-style-type: none"> • Working Range • Output Resistance • Maximum Current • Setting range of Offset Voltage (output) • Setting Range of Transfer (gain) • Thermal Stability Between 0 and +55°C 	\pm 10 VDC 100 Ω 2 mA -10 to +10 VDC +0.26 V/mA to +3.12 V/mA or -0.26 V/mA to -3.12 V/mA 150 ppm/°C typical
Displacement Current Signal <ul style="list-style-type: none"> • Working Range • Type • Maximum load • Setting Range of Offset Current (output) • Setting Range of Transfer (gain) • Thermal Stability Between 0 and +55°C 	0 to 20 mA (4 to 20 mA) or 20 to 0 mA (20 to 4 mA) single pole current source \leq 500 Ω 0 to 20 mA +0.52 mA/mA to +6.24 mA/mA or -0.52 mA/mA to -6.24 mA/mA 150 ppm/°C typical
Temperature Signal <ul style="list-style-type: none"> • Working Range • Output Resistance • Maximum Current • Transfer 	\pm 10 VDC 100 Ω 2 mA 100 mV/°C (2 VDC \equiv 20 °C)
Transmission OK	Open collector (20 mA max.)
ENVIRONMENT	
Plastic Housing <ul style="list-style-type: none"> • Operating Temperature • Storage Temperature • Humidity • Vibration and Shock • EMC 	0 to +55 °C -20 to +70 °C Max. 95% without condensation 2 g / 10 to 55 Hz According to EN-58081-2 (Generic Emission Standard) and EN-58082-2 (Generic Immunity Standard)
Aluminum Housing <ul style="list-style-type: none"> • Operating Temperature • Storage Temperature • Humidity • Vibration and Shock • EMC 	-40 to +80 °C -45 to +85 °C IP 65 According to IEC 68.2 According to EN-58081-2 (Generic Emission Standard) and EN-58082-2 (Generic Immunity Standard)
MECHANICAL CHARACTERISTICS	
Plastic Housing <ul style="list-style-type: none"> • Weight 	\approx 0.2 kg / \approx 0.441 lb
Aluminum Housing <ul style="list-style-type: none"> • Type • Stuffing Glands • Weight 	A123 3 \times PG 11 \approx 2 kg / \approx 4.41 lb

DIMENSIONS


Plastic Housing (CST 113 / 011)

For mounting on a DIN rail

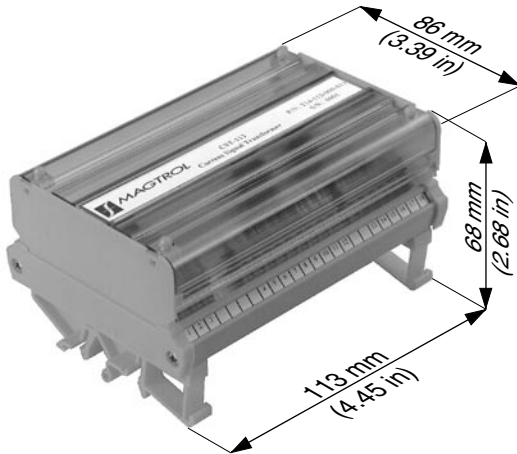

Aluminum Housing (CST 113 / 021)

Aluminum IP 65

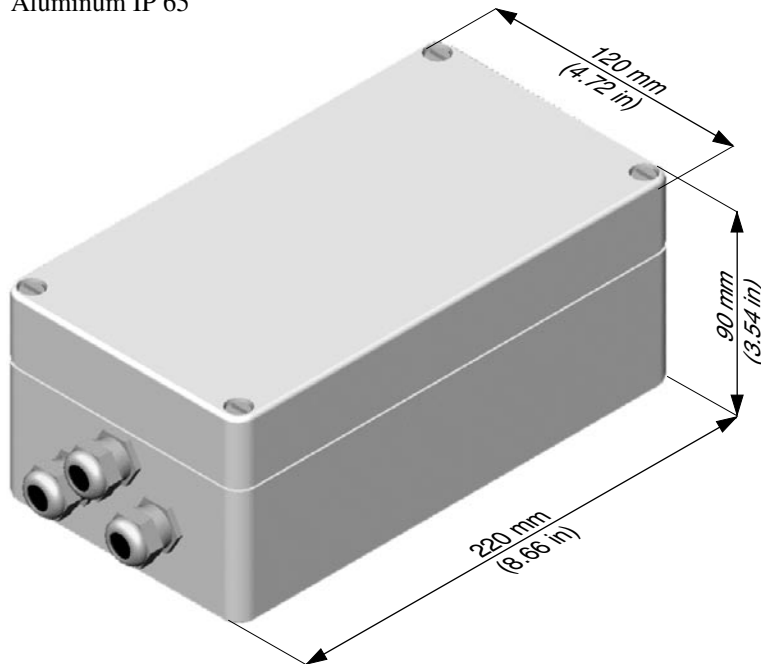

ORDERING INFORMATION

PART NUMBER	MODEL	DESCRIPTION
214-113-000-011	CST 113 / 011	Signal Converter I/U and I/I with plastic housing
214-113-000-021	CST 113 / 021	Signal Converter I/U and I/I with aluminum IP 65 housing

Accessory Ordering Information

CABLE	Part Number
4-Core Connection Cable	
• Radox K-414	957.37.22.2666
MATING PLUG (5-pole)	Part Number
• Straight	957.11.08.0122
• Right-Angle (90°)	957.11.08.0132

CONNECTION CABLE ASSEMBLY (K-414 cable with 5-pole mating plug)

Part Number: EH 14 / 0 1

Mating Plug	Part Number
• Straight	4
• Right-Angle (90°)	5

Cable Length	Part Number
• 3 m	1
• 5 m	2
• 10 m	3

DISPLAYS AND INDICATORS (On request)

Due to the continual development of our products, we reserve the right to modify specifications without forewarning.



www.magtrol.com

MAGTROL INC
70 Gardenville Parkway
Buffalo, New York 14224 USA
Phone: +1 716 668 5555
Fax: +1 716 668 8705
E-mail: magtrol@magtrol.com

MAGTROL SA
Route de Moncor 4B
1701 Fribourg, Switzerland
Phone: +41 (0)26 407 3000
Fax: +41 (0)26 407 3001
E-mail: magtrol@magtrol.ch

Subsidiaries in:

- Germany
- France
- Great Britain

Worldwide Network
of Sales Agents

