
ZF Series

Force Transducers

FEATURES

- 1 kN to 200 kN
- High accuracy
- For tensile or pressure forces
- Made of stainless steel
- Enclosure protection IP 67



DESCRIPTION

The force transducers of the ZF series have been designed for the measurement of static and dynamic tensile and pressure forces; they are characterised by their low assembly height at a high measuring accuracy. The force is introduced on one side through a central tapped hole, the other side of the force transducer has to be fixed to a sufficiently rigid plane surface by means of 8 high-strength hexagonal socket-head bolts to be tightened with a defined torque. A strain gauge bridge

converts the elastic deformation of the sensing element into an electrical signal that can be evaluated. Compensation and adjustment elements are used to set the required technical data. The entire unit is made of a special stainless steel. As a standard, the transducers are equipped with a 3 m connection cable, which has free ends on the other side. If separately ordered the unit can also be supplied with a plug connection in accordance with the MIL specification.

Accuracy class		0.1	0.2
Nominal force ($=F_N$)	kN	1/2/5/10/20/50/100	200
Max. permissible force	$\%F_N$	0.5/1/2/5	150
Ultimate overload	$\%F_N$	>500	
Max. transverse force	$\%F_N$	10	
Reference temperature	°C	+23	
Nominal temperature range	°C	-20 to +50	
Storage temperature range	°C	-30 to +70	
Enclosure protection (DIN 40050)		IP 67	
Nominal sensitivity ($=S$)	mV/V	2.000 ±0.005	
Zero tolerance band	$\%S$	≤3	
Max. supply voltage	V	20	
Input resistance	Ω	770 ±40	
Output resistance	Ω	700 ±10	
Insulation resistance	Ω	>5 × 10 ⁹	
Combined error *	$\%S$	0.1	
Linearity error	$\%S$	0.1	0.2
Width of backlash	$\%S$	0.1	0.2
TC of zero per 10 K	$\%S$	0.1	0.2
TC of sensitivity per 10 K	$\%S$	0.1	0.2
Creepage error (30 min)	$\%S$	0.1	0.2

* According to VDE / VDI 2638


PIN CONNECTIONS

Pin	To DIN
Supply voltage (+)	brown
Supply voltage (-)	yellow
Measuring voltage (+)	green
Measuring voltage (-)	white
Shield	black
Cable length	3 m

TORQUE FOR FASTENING SCREWS

Model	Size	Torque
ZF 1/2/5/10 kN	M8	50 Nm
ZF 20/50 kN	M10	85 Nm
ZF 100/200 kN	M12	150 Nm

ZF 1 kN to 50 kN

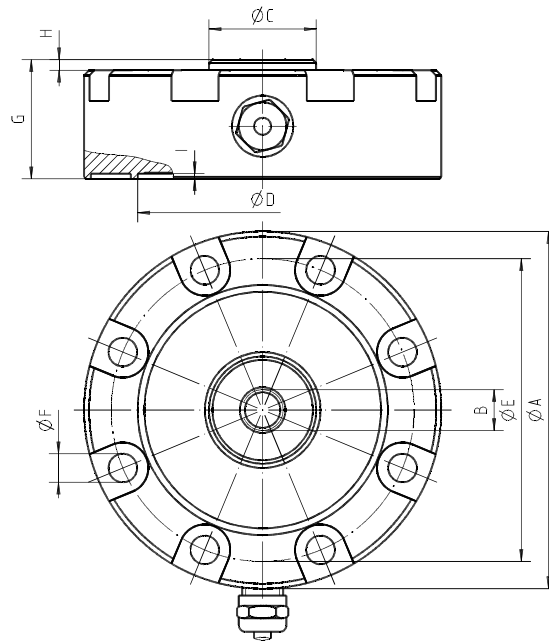


Type	A	B	C	D	E	F	G	H	I	Weight
ZF 1/2/5/10 kN	Ø 105	M12	31.5	73.5	89	8.4	35	3	1.5	0.5 kg
ZF 20/50 kN	Ø 150	M24 x 2	40	105	130	11	40	2	1	3.7 kg

ZF 100 kN to 200 kN


MODELS
Nominal force

100 kN
200 kN

Weight: 4.9 kg

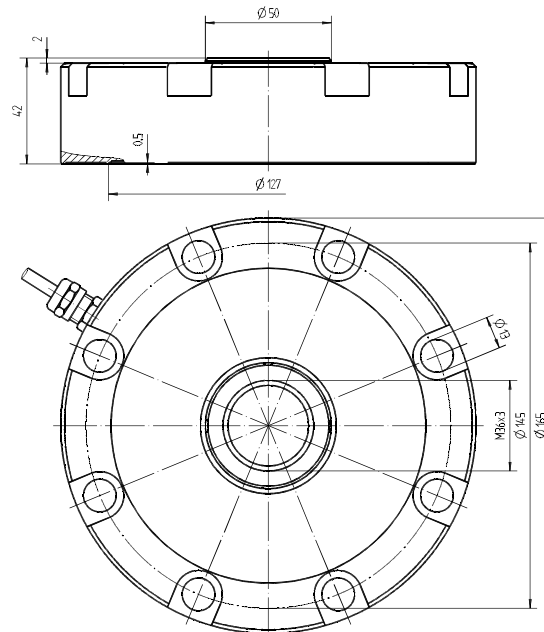

Counter plate for ZF

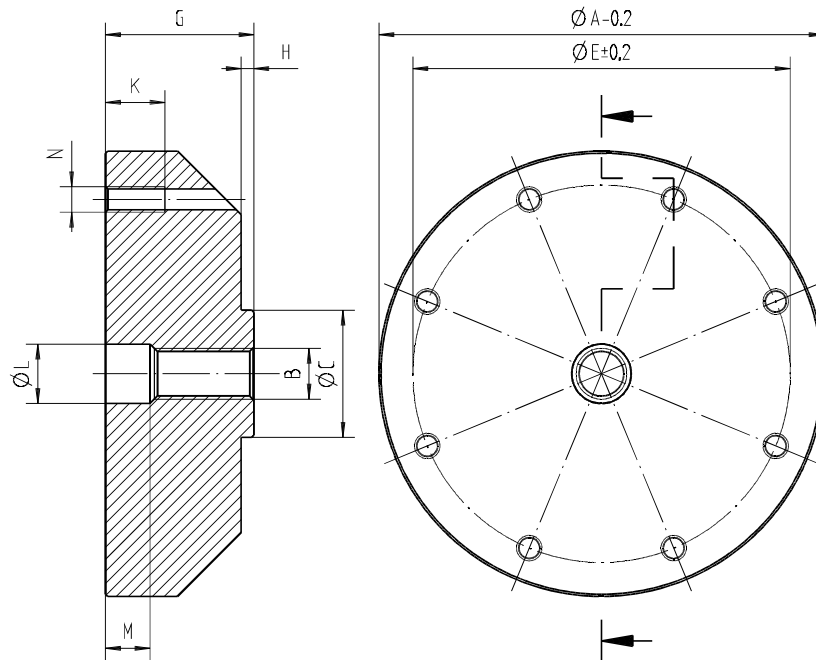

Nominal force	Model	$\varnothing A$	B	C	E	G	H	K	L	M	N
ZF 1/2/5/10 kN	AM 037	105	M12	31.5	89	35	3	14	~14	10.5	M8
ZF 20/50 kN	AM 038	150	M24 x 2	40	130	40	2	15	~27	10.5	M10
ZF 100/200 kN	AM 035	165	M36 x 3	50	145	42	2	15	-	-	M12

ORDERING INFORMATION FOR MECHANICAL ACCESSORIES

ZF 1 kN to 50 kN

AM 019	Force introduction calotte A 12-50 for ZF 1 kN to 10 kN
AM 044	Force introduction calotte A 24-50 for ZF 20 kN and 50 kN
AM 037	Counter plate for ZF 1 kN to 10 kN
AM 038	Counter plate for ZF 20 kN and 50 kN
AA 12	Flexible head (external screw thread) with counter nut for ZF 1 kN to 10 kN
AA 25	Flexible head (external screw thread) with counter nut for ZF 20 kN and 50 kN
AC 043	6-pin plug connector at the force transducer


ZF 100 kN to 200 kN

AM 045	Force introduction calotte A 36-120 for ZF 100 kN and 200 kN
AM 035	Counter plate for ZF 100 kN and 200 kN
AA 35	Flexible head (external screw thread) with counter nut for ZF 100 kN
AC 043	6-pin plug connector at the force transducer

ORDERING INFORMATION

Explanation of Type Code (Ordering Example)

for Force Transducers

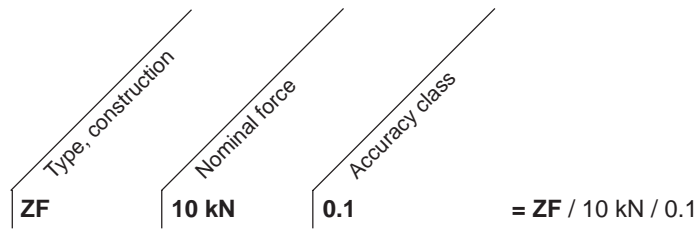

SYSTEM OPTIONS

Model No.	Product Description	Ordering Number
LMU 112	Load monitoring unit containing 2 level detectors, 1 current and 1 voltage O/Ps	224-112-000-XXX
LMU 116	Load monitoring unit containing 4 level detectors, taring and 4 summer functions	224-116-000-XXX
LMU 117	Dual channel load monitoring unit (2 x LMU 112)	224-117-000-XXX
AN 2000 C	Digital process monitor for strain gauge transducers	AN 2000 C /X/X/XX/XX/X

Due to the continual development of our products, we reserve the right to modify specifications without forewarning.



www.magtrol.com

MAGTROL INC

70 Gardenville Parkway
Buffalo, New York 14224 USA
Phone: +1 716 668 5555
Fax: +1 716 668 8705
E-mail: magtrol@magtrol.com

MAGTROL SA

Route de Moncor 4B
1701 Fribourg, Switzerland
Phone: +41 (0)26 407 3000
Fax: +41 (0)26 407 3001
E-mail: magtrol@magtrol.ch

Subsidiaries in:

- Germany
- France
- Great Britain

Worldwide Network
of Sales Agents

