



Conax Technologies offers three models of split seals designed to facilitate assembly and sealant replacement when the diameter of the probe tip is larger than the diameter of the element(s) at the location of the seal. Split glands provide split sealants, followers and seats to facilitate easy sealant change without removing the element(s) from the system.



Possible applications include the sealing of analyzer sampling probes with blow-out collars, gas-filled capillary bulb temperature sensors, cable assemblies with factory-installed connectors or to facilitate assembly and disassembly of long cable/sheath lengths.

- **PGS Series** assemblies seal on single elements.
- **SPG Series** assemblies seal on multiple elements with a single split.
- **DSPG Series** assemblies seal on multiple elements with a double split.


Optional materials are also available. See page 9 for details. Caps, seats and followers for all styles are constructed from 303SST. Cap Style A offers a mounting thread only. Cap Style B provides threading on both ends for attachment to conduit or terminal heads.

Split glands are offered with Viton, PTFE, Lava and Grafoil sealants, however, due to the complexities of construction, not all hole densities are available in all sealant materials. Alternative sealant materials and custom bore sizes are available. Please consult a Conax sales engineer for custom needs.

- Temperature Range: -400° F to +1600° F (-240° C to +870° C)
- Pressure Range: Vacuum to 10,000 PSIG (690 bar) for PGS Series. For SPG and DSPG, due to the many variables affecting pressure ratings on these assemblies, no pressure rating guide is provided. Please consult factory for pressure ratings on a given assembly.

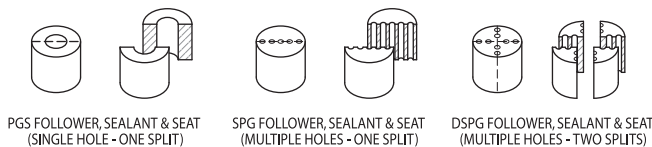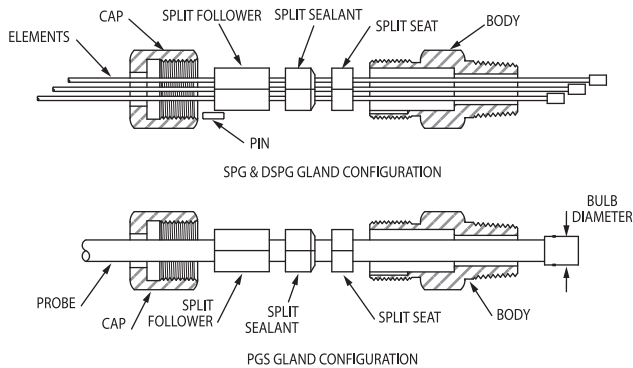

Bodies with NPT threads are constructed from 303SST standard. Weld-neck style gland bodies are constructed from 316LSST standard.

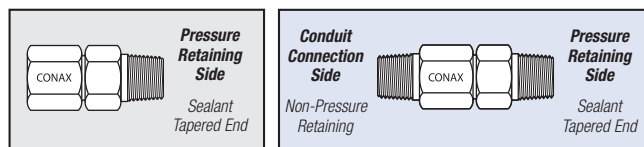

Type A has mounting thread only. Type B has cap end threaded. B Cap NPT matches the standard mounting NPT.

### Accessories

The replaceable sealant permits repeated use of the same fitting. Elements can be easily assembled or replaced in the field. To replace the sealant or elements, simply loosen the cap, replace the necessary items, relubricate and retorque the cap.

Glands are supplied factory lubricated. If glands are cleaned prior to assembly or when reused, the glands should be relubricated to maintain the published torque and pressure ratings. See page 103 for information on our lubrication kit.

To order a Replacement Sealant for SPG and DSPG models, order RS – (Gland) – (Diameter) – (Number of Holes) – (Sealant)

**Example: RS-SPG75-062-2-T**

To order a Replacement Packing Set, including sealant, seat and follower, order RPS – (Gland) – (Diameter) – (Number of Holes) – (Sealant)

**Example: RPS-SPG75-062-2-T**

To order a Replacement Sealant for PGS models, order RS – (Gland) – (Diameter) – (Sealant)

**Example: RS-PG2S-093-T**


To order a Replacement Packing Set, including sealant, seat and follower, order RPS – (Gland) – (Diameter) – (Sealant)

**Example: RPS-PG2S-093-T**


## SPLIT SEALS FOR SINGLE & MULTIPLE PROBE SEALING ■ PGS, SPG & DSPG SERIES


REFER TO OUR WEBSITE: [WWW.CONAXTECHNOLOGIES.COM](http://WWW.CONAXTECHNOLOGIES.COM) FOR OUR DEMONSTRATIONAL VIDEO.

### Catalog Numbering System – PGS

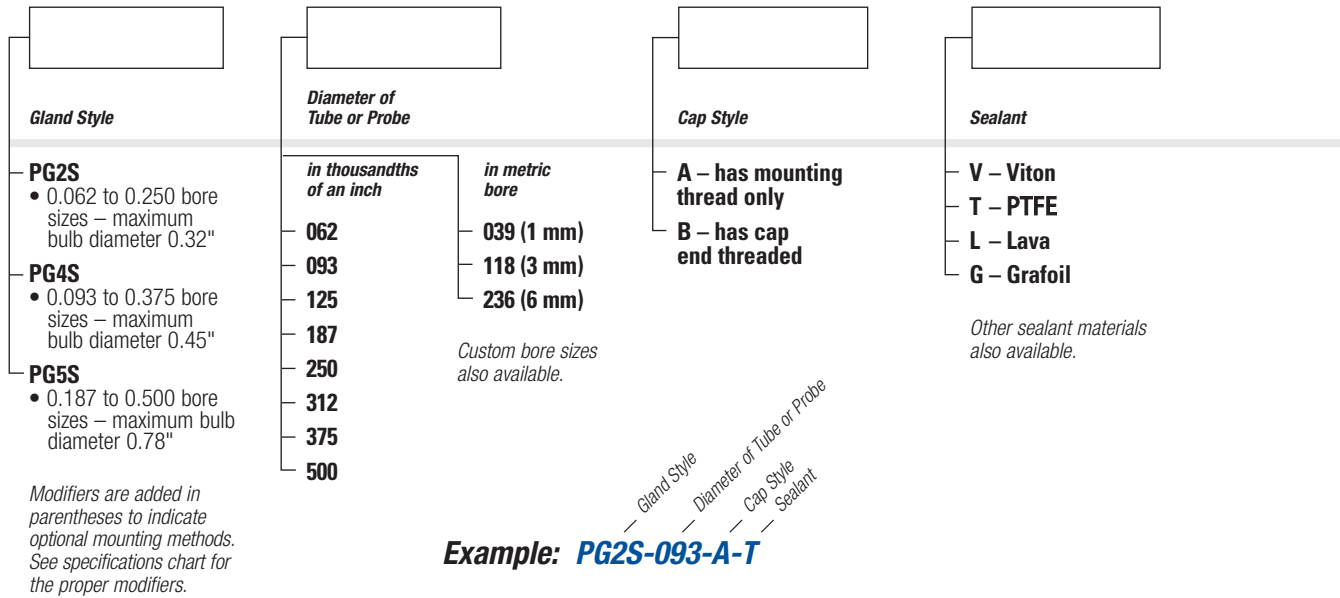


### Catalog Numbering System – SPG and DSPG

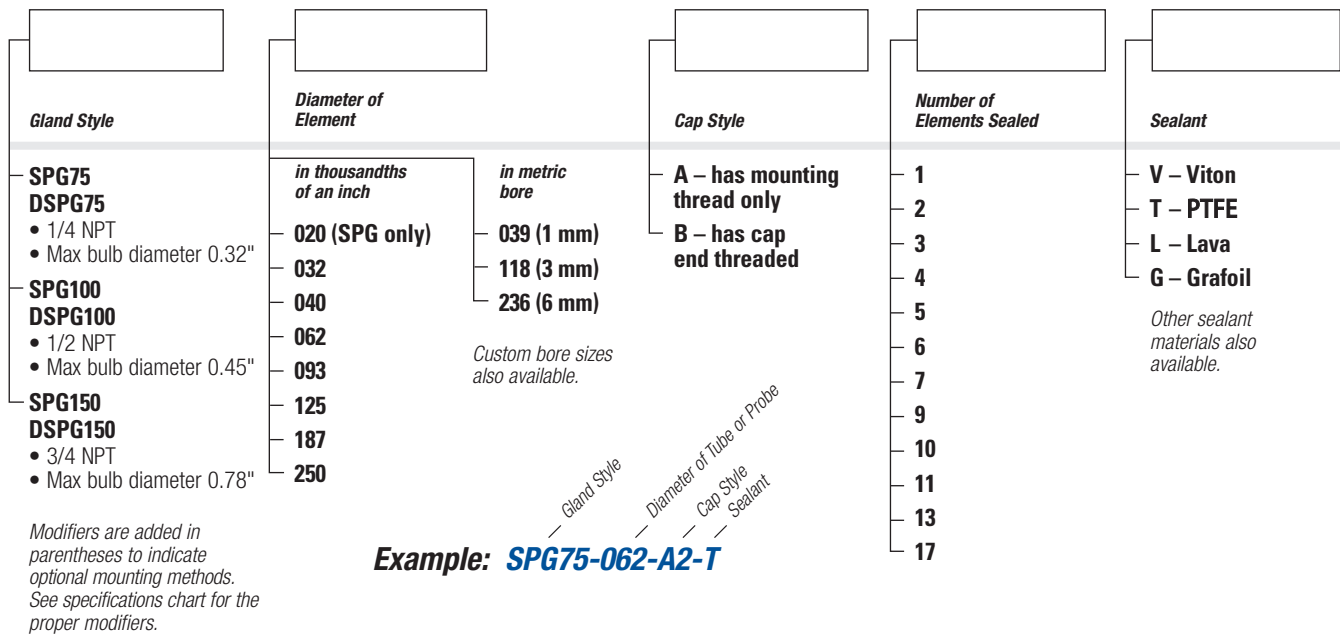

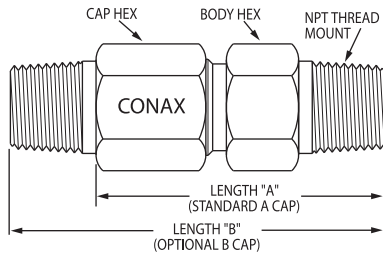

**Standard NPT**

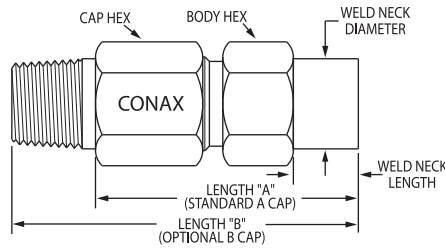

**Weld Neck Mount**

### Maximum Probe Density

Probe Diameter	SPG75	SPG100	SPG150	DSPG75	DSPG100	DSPG150
0.020	5	7	11	N/O	N/O	N/O
0.032	4	5	10	5	9	17
0.040	3	5	9	5	9	17
0.062	2	4	7	4	5	13
0.093	2	3	5	N/O	5	9
0.125	1	2	4	N/O	4	6
0.187	1	1	3	N/O	N/O	5
0.250	1	1	2	N/O	N/O	4

SPG and DSPG assemblies are not available in all gland sealant materials and/or hole densities. Please consult factory for availability.  
N/O = Not Offered.

### Specifications – SPG & DSPG

Catalog Number	Length 'A'		Length 'B'		Hex Size				Pressure Rating	
	IN	MM	IN	MM	Body IN	Cap IN	Body MM	Cap MM	PSIG	BAR
<b>Standard 1/4 NPT</b>										
SPG75	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	C/F	C/F
DSPG75	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	C/F	C/F
<b>Weld Neck Mount (Weld Neck Mount Length 0.59", Diameter 0.540")</b>										
SPG75(SWM2/S316L)	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	C/F	C/F
DSPG75(SWM2/S316L)	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	C/F	C/F
<b>Standard 1/2 NPT</b>										
SPG100	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	C/F	C/F
DSPG100	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	C/F	C/F
<b>Weld Neck Mount (Weld Neck Mount Length 0.78", Diameter 0.840")</b>										
SPG100(SWM4/S316L)	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	C/F	C/F
DSPG100(SWM4/S316L)	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	C/F	C/F
<b>Standard 3/4 NPT</b>										
SPG150	3.31	84.1	4.06	103.1	1.250	1.500	31.8	38.1	C/F	C/F
DSPG150	3.31	84.1	4.06	103.1	1.250	1.500	31.8	38.1	C/F	C/F
<b>Weld Neck Mount (Weld Neck Mount Length 0.79", Diameter 1.050")</b>										
SPG150(SWM5/S316L)	3.31	84.1	4.06	103.1	1.250	1.500	31.8	38.1	C/F	C/F
DSPG150(SWM5/S316L)	3.31	84.1	4.06	103.1	1.250	1.500	31.8	38.1	C/F	C/F

\* Hex size for the body and cap are the same.


\*\* When applying torque to SPG150 and DSPG150 models with 0.040" diameters or less containing Grafoil sealants, torque to 200 ft.-lbs., then retorque to 225 ft.-lbs after 24 hours.

† Weld neck models require lubrication prior to use.


N/O = Not Offered. C/F = Consult Factory.

All pressure and torque ratings were determined at 68° F (20° C) using stainless steel rod as the element. Pressure ratings may degrade at higher temperatures. Pressure rating guide values are provided for glands with elements restrained by the compressed sealant. Higher pressure may be attained with additional element restraints. Tolerance of tube or probe diameters 0.040" and larger is ±0.005; less than 0.040" is ±0.003. Deviation from the nominal may affect the pressure rating.

## SPLIT GLANDS FOR SINGLE & MULTIPLE PROBE SEALING ■ PGS, SPG & DSPG SERIES

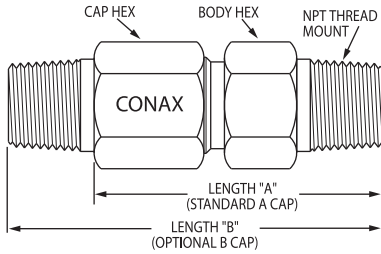

Standard NPT

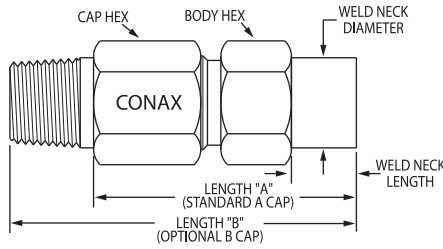

Weld Neck Mount

### Specifications – PGS

Catalog Number	Tube/Probe Diameter		Length 'A'		Length 'B'		Hex Size				Pressure Rating							
	IN	MM	IN	MM	IN	MM	Body IN	Cap IN	Body MM	Cap MM	Viton		PTFE		Lava		Grafoil	
											PSIG	BAR	PSIG	BAR	PSIG	BAR	PSIG	BAR
<b>Standard 1/4 NPT</b>																		
PG2S-062	0.062	1.57	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	10,000	689	3,200	220	10,000	689	10,000	689
PG2S-093	0.093	2.36	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,800	193	1,900	131	9,000	620	8,000	551
PG2S-125	0.125	3.18	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,800	193	1,400	96	9,000	620	7,200	496
PG2S-187	0.187	4.75	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	4,500	310	900	62	8,800	606	4,000	276
PG2S-250	0.250	6.35	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,000	138	720	50	7,500	517	3,600	248
<b>Weld Neck Mount (Weld Neck Mount Length 0.59", Diameter 0.540")</b>																		
PG2S(SWM2/S316L)-062	0.062	1.57	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	10,000	689	3,200	220	10,000	689	10,000	689
PG2S(SWM2/S316L)-093	0.093	2.36	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,800	193	1,900	131	9,000	620	8,000	551
PG2S(SWM2/S316L)-125	0.125	3.18	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,800	193	1,400	96	9,000	620	7,200	496
PG2S(SWM2/S316L)-187	0.187	4.75	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	4,500	310	900	62	8,800	606	4,000	276
PG2S(SWM2/S316L)-250	0.250	6.35	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,000	138	720	50	8,000	517	3,600	248
<b>Standard 1/2 NPT</b>																		
PG4S-093	0.093	2.36	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	1,500	103	1,600	110	10,000	689	10,000	689
PG4S-125	0.125	3.18	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	1,500	103	1,600	110	10,000	689	10,000	689
PG4S-187	0.187	4.75	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	1,500	103	1,600	110	10,000	689	8,000	551
PG4S-250	0.250	6.35	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	1,500	103	1,600	110	10,000	689	5,000	345
PG4S-312	0.312	7.92	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	1,200	83	2,000	138	10,000	689	5,000	345
PG4S-375	0.375	9.53	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	500	34	1,400	96	7,500	517	4,500	310
<b>Weld Neck Mount (Weld Neck Mount Length 0.78", Diameter 0.840")</b>																		
PG4S(SWM4/S316L)-093	0.093	2.36	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	1,500	103	1,600	110	10,000	689	10,000	689
PG4S(SWM4/S316L)-125	0.125	3.18	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	1,500	103	1,600	110	10,000	689	10,000	689
PG4S(SWM4/S316L)-187	0.187	4.75	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	1,500	103	1,600	110	10,000	689	8,000	551
PG4S(SWM4/S316L)-250	0.250	6.35	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	1,500	103	1,600	110	10,000	689	5,000	345
PG4S(SWM4/S316L)-312	0.312	7.92	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	1,200	83	2,000	138	10,000	689	5,000	345
PG4S(SWM4/S316L)-375	0.375	9.53	2.56	65.1	3.38	85.7	1.000	1.000	25.4	25.4	500	34	1,400	96	7,500	517	4,500	310
<b>Standard 3/4 NPT</b>																		
PG5S-187	0.187	4.75	3.31	84.1	4.19	106.4	1.250	1.500	31.8	38.1	2,100	145	800	55	2,000	138	1,200	83
PG5S-250	0.250	6.35	3.31	84.1	4.19	106.4	1.250	1.500	31.8	38.1	1,600	110	800	55	2,000	138	900	62
PG5S-375	0.375	9.53	3.31	84.1	4.19	106.4	1.250	1.500	31.8	38.1	1,000	69	800	55	2,800	193	600	41
PG5S-500	0.500	12.70	3.31	84.1	4.19	106.4	1.250	1.500	31.8	38.1	800	55	800	55	2,000	138	480	33
<b>Weld Neck Mount (Weld Neck Mount Length 0.79", Diameter 1.050")</b>																		
PG5S(SWM5/S316L)-187	0.187	4.75	3.31	84.1	4.19	106.4	1.250	1.500	31.8	38.1	2,100	145	800	55	2,000	138	1,200	83
PG5S(SWM5/S316L)-250	0.250	6.35	3.31	84.1	4.19	106.4	1.250	1.500	31.8	38.1	1,600	110	800	55	2,000	138	900	62
PG5S(SWM5/S316L)-375	0.375	9.53	3.31	84.1	4.19	106.4	1.250	1.500	31.8	38.1	1,000	69	800	55	2,800	193	600	41
PG5S(SWM5/S316L)-500	0.500	12.70	3.31	84.1	4.19	106.4	1.250	1.500	31.8	38.1	800	55	800	55	2,000	138	480	33

**CAUTION:** When sealing on soft, fragile or crushable elements, catalog torques may not apply. When catalog torques are applied, compressed sealants generate considerable forces on the element to be sealed. These forces could result in damaging soft or fragile elements such as coax cables or thin-wall materials. Consult factory for these types of applications.