


ANSI Current Transformer Series




2 Series

2SFT, 2SHT & 2RL Series

2SFT

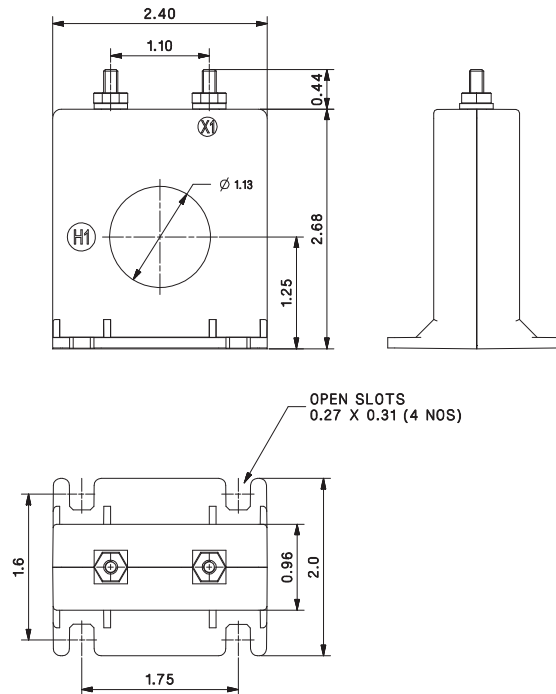

2SHT

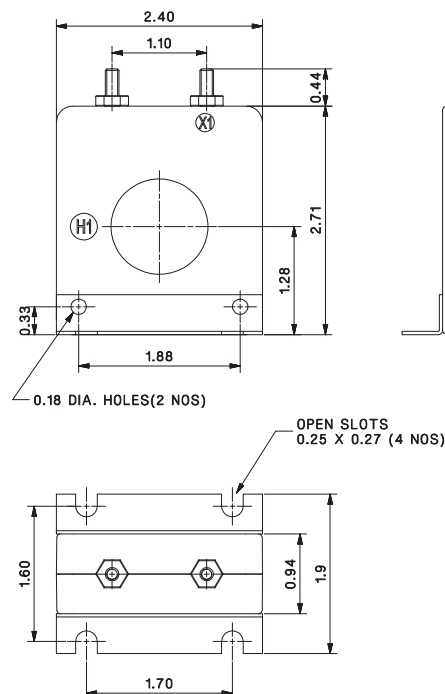


ALL DIMENSIONS ARE IN INCHES

ANSI Current Transformer Series

2 Series

2SFT, 2SHT & 2RL Series

2RL

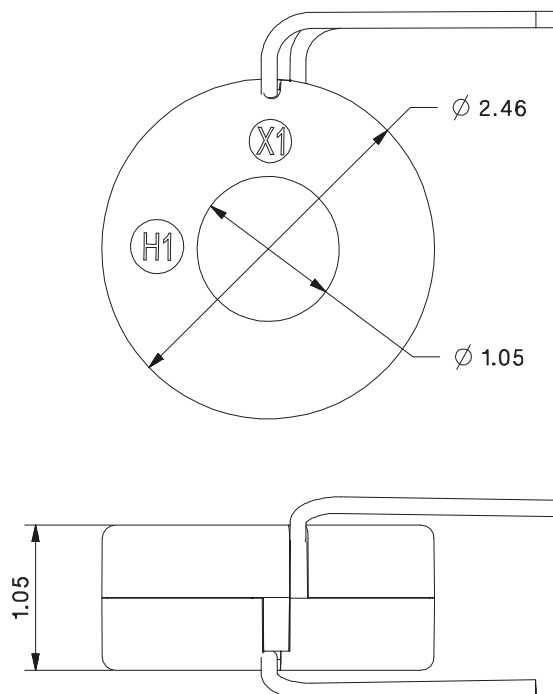

2SFT, 2SHT & 2RL

Current Ratio	Class	VA
50	± 3 %	1.5
60	± 2 %	2.0
75	± 2 %	2.0
80	± 2 %	2.0
100	± 1 %	2.0
120	± 1 %	2.5
125	± 1 %	2.5
150	± 1 %	4.0
200	± 1 %	4.0
250	± 1 %	6.0
300	± 1 %	8.0

Used for ammeter only
Approx. weight 0.5lbs



shop.electro-meters.com

ALL DIMENSIONS ARE IN INCHES

ANSI Current Transformer Series

Specifications

- Applicable standard : ANSI/IEEE C57.13
- Case : 10% glass filled polycarbonate, flame retardant grades classified UL 94V-0.
- Frequency : 50-400 Hz
- Insulation Level : 600 Volts, 10KV BIL fill wave
- Flexible leads are rated UL 1015, 105 Deg C, CSA approved, #16 AWG, 24" in length
- Non-standard length to be specified
- For all the SHT & SFT types terminals are brass studs No. 8-32 with one flat washer, lock washer & regular nut
- All the SHT & SFT models also available as SHL & SFL with leads
- For all the SHT types- mounting bracket kit when required

Applications

- Used for measurement purposes in conjunction with ammeters, wattmeters, etc.
- Also applicable for cross current compensation.