

Model 143MR

Current Transformer with Multi-Ratio Window Diameter 7.31"

Application

Relaying.

Frequency

50-400 Hz.

Insulation Level

600 Volt, 10 kV BIL full wave.

Terminals are brass screws No. 10-32 with one flatwasher and lockwasher.

The transformer winding is arranged so that the turns are fully distributed between all taps.

Order mounting bracket kit 0221B00775 separately.

Approximate weight 60 lbs.




Model 143MR

Catalog Number	Relay Class	Continuous Thermal Rating Factor	
		@ 30 °C	@ 55 °C
143-601MR	C200	2.0	1.5
143-122MR	C400	1.5	1.0
143-202MR	C400	1.33	1.0
143-302MR	C800	1.0	0.8
143-402MR	C800	1.0	0.6
143-502MR	C800	1.0	0.6


REGULATORY AGENCY APPROVALS

RU E93779 **SP** LR89403


Manufactured to meet the requirements of ANSI/IEEE C57.13. Classified by U.L. in accordance with IEC 44-1

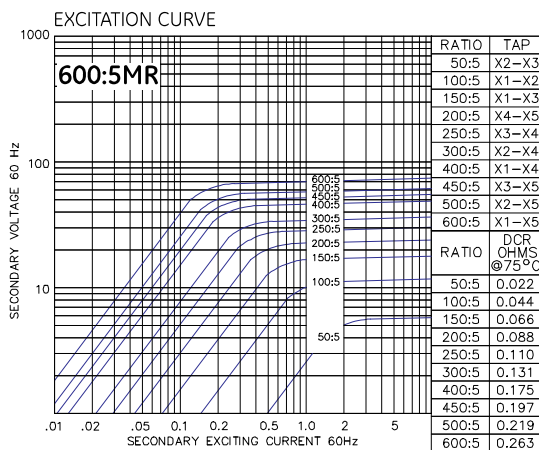


Model 140-601MR

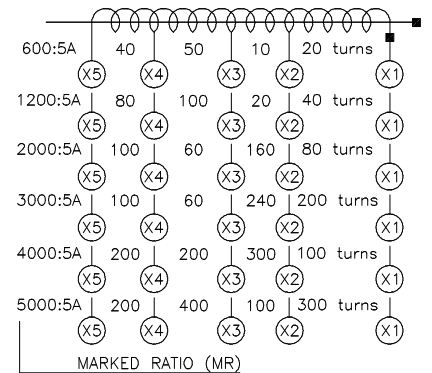


Model 143MR

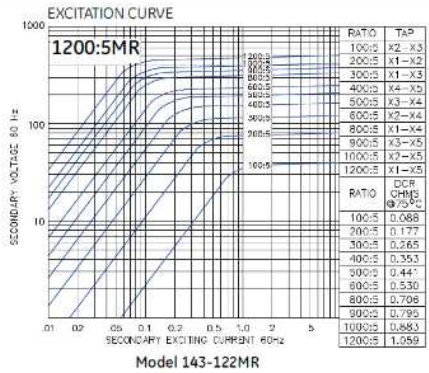


Model 143-122MR

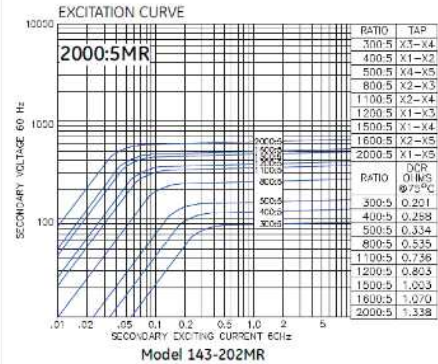


Model 143-202MR

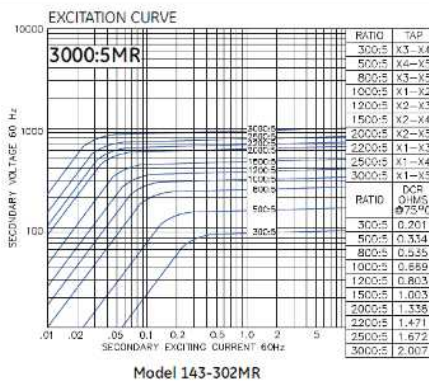


Model 143-302MR

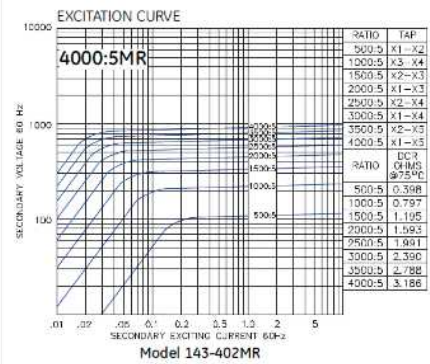

Model 143-402MR

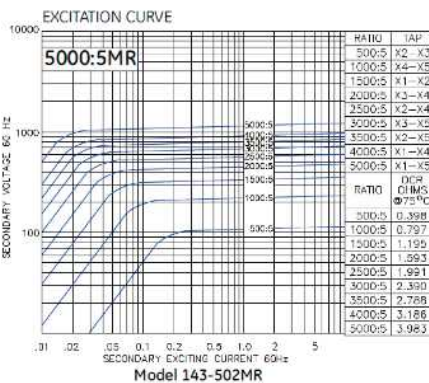

Model 143-502MR

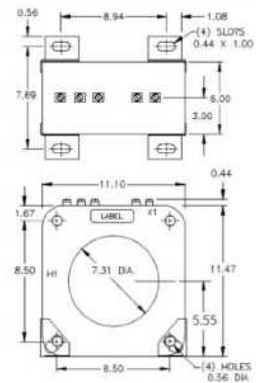

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_143MR-1257-2017_05-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

