

Model 388

Current Transformer Window Diameter 5.75"

Application

Relaying and metering.

Frequency

50-400 Hz.

Insulation Level

600 Volt, 10 kV BIL full wave.

Terminals are brass screws No. 10-32 with one flatwasher and lockwasher.

Multi-ratios available on request.

Approximate weight 35 lbs.





Model 388

Catalog Number	Current Ratio	Relay Class	ANSI Metering Class at 60 Hz					Secondary Winding Resistance (Ω @ 75 °C)	Continuous Thermal Rating Factor	
			B0.1	B0.2	B0.5	B0.9	B1.8		@ 30 °C	@ 55 °C
388-201	200:5	C20	0.6	0.6	1.2	2.4	4.8	0.061	2.0	2.0
388-251	250:5	C20	0.3	0.6	1.2	2.4	2.4	0.077	2.0	2.0
388-301	300:5	C50	0.3	0.3	0.6	1.2	2.4	0.092	2.0	2.0
388-401	400:5	C50	0.3	0.3	0.3	0.6	1.2	0.123	2.0	2.0
388-501	500:5	C50	0.3	0.3	0.3	0.6	0.6	0.153	2.0	2.0
388-601	600:5	C100	0.3	0.3	0.3	0.3	0.6	0.184	2.0	2.0
388-751	750:5	C100	0.3	0.3	0.3	0.3	0.3	0.230	2.0	2.0
388-801	800:5	C100	0.3	0.3	0.3	0.3	0.3	0.245	2.0	2.0
388-102	1,000:5	C100	0.3	0.3	0.3	0.3	0.3	0.307	2.0	1.5
388-122	1,200:5	C200	0.3	0.3	0.3	0.3	0.3	0.368	2.0	1.5
388-152	1,500:5	C200	0.3	0.3	0.3	0.3	0.3	0.502	2.0	1.5
388-162	1,600:5	C200	0.3	0.3	0.3	0.3	0.3	0.535	2.0	1.5
388-202	2,000:5	C200	0.3	0.3	0.3	0.3	0.3	0.669	1.5	1.33
388-252	2,500:5	C400	0.3	0.3	0.3	0.3	0.3	0.836	1.5	1.0
388-302	3,000:5	C400	0.3	0.3	0.3	0.3	0.3	0.933	1.5	1.0
388-322	3,200:5	C400	0.3	0.3	0.3	0.3	0.3	0.995	1.5	1.0
388-352	3,500:5	C400	0.3	0.3	0.3	0.3	0.3	1.083	1.5	1.0
388-402	4,000:5	C400	0.3	0.3	0.3	0.3	0.3	1.244	1.33	1.0



Model 388

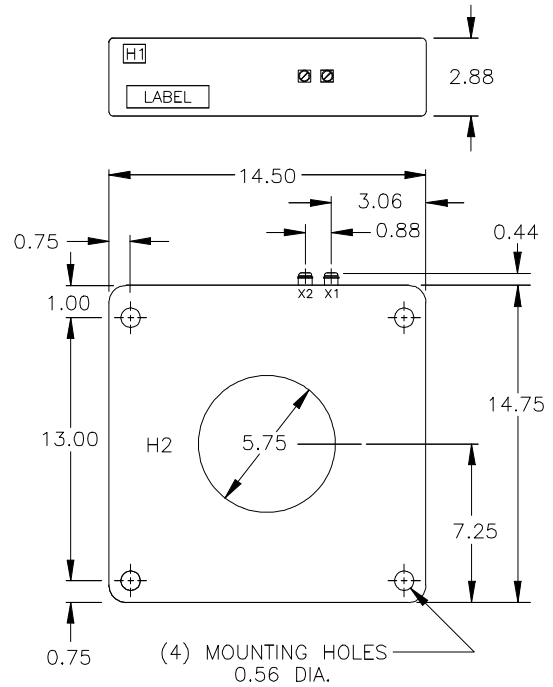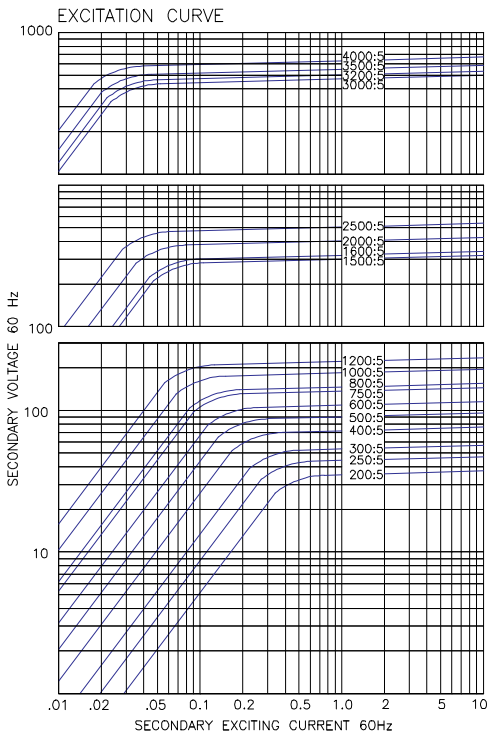

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_388-1301-2017_05-EN. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

