

Model 3P83 and 3P86

Current Transformer
Window Sizes 1.55" x 0.45", 1.55" x 0.25"

Application

3 phase relay, metering and motor overload protection.

Frequency

50-400 Hz.


Insulation Level

600 Volts, 10 kV BIL full wave.

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.

Flexible leads U. L. 1015, 105 °C., CSA approved , No. 16 AWG , 24" long are available.

Approximate weight 4 lbs.

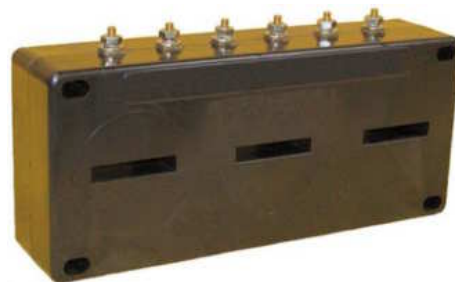

REGULATORY AGENCY APPROVALS
 E93779  LR89403
 Manufactured to meet the requirements of ANSI/IEEE C57.13.
 Classified by U.L. in accordance with IEC 44-1



Model 3P83 and 3P86

Catalog Number	Current Ratio	V.A. for 1% Class	ANSI Metering Class at 60 Hz					Secondary Winding Resistance (Ω @ 75°C)
			BO.1	BO.2	BO.5	BO.9	B1.8	
3P83-500	50:5	2.5	4.8	—	—	—	—	0.015
3P83-101	100:5	2.5	2.4	2.4	4.8	—	—	0.030
3P83-151	150:5	7.5	1.2	1.2	2.4	4.8	4.8	0.045
3P83-201	200:5	10.0	0.6	1.2	2.4	2.4	4.8	0.061
3P83-251	250:5	12.0	0.6	0.6	1.2	2.4	2.4	0.076
3P83-301	300:5	20.0	0.3	0.6	1.2	1.2	2.4	0.091
3P83-401	400:5	25.0	0.3	0.6	0.6	1.2	1.2	0.122
3P83-501	500:5	40.0	0.3	0.3	0.3	0.6	1.2	0.153
3P83-601	600:5	40.0	0.3	0.3	0.6	0.6	0.6	0.161
3P83-801	800:5	60.0	0.3	0.3	0.3	0.3	0.6	0.215

* For Model 3P86 change prefix.



Models 3P83 and 3P86

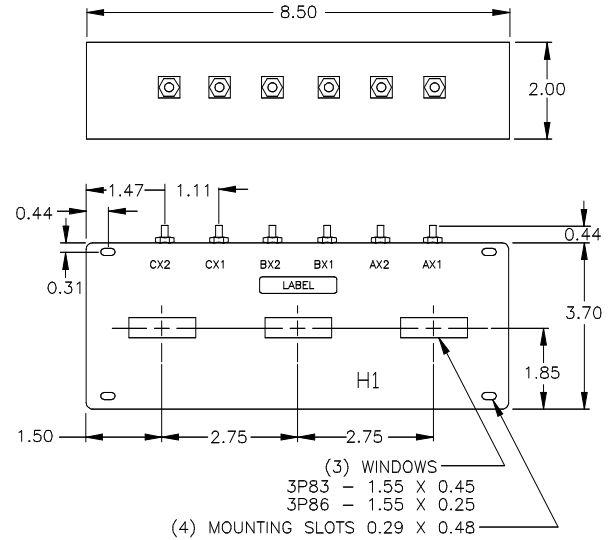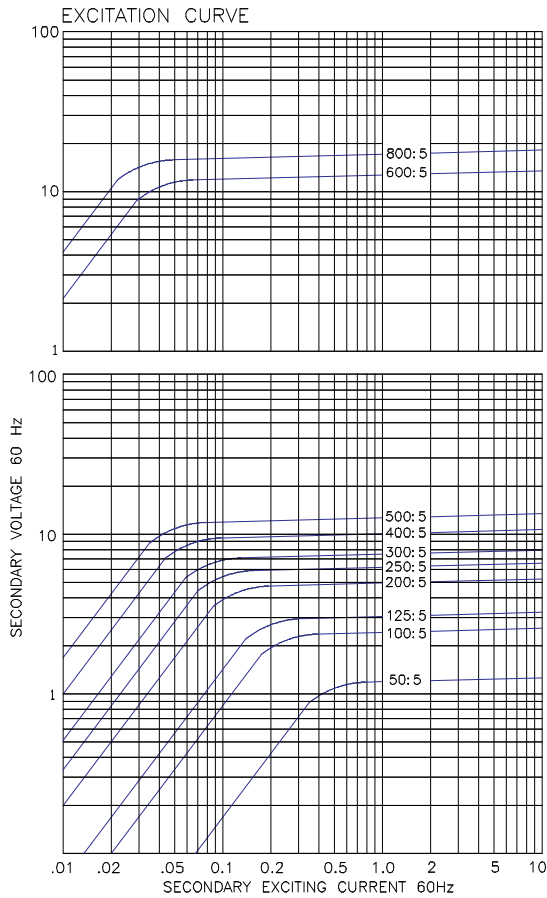

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_3P83-1206-2017_05-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

