

Model 468

Voltage Transformer

Application

60 Hz.

Standard Secondary Voltage

120 Volts.

Insulation Level

600 Volt, 10 kV BIL full wave.

Accuracy Class:

± 0.6% at all burdens up to 7.5 VA and
±1.5% 20 VA burden.

Thermal Rating:

75 VA at 30 °C. amb.
50 VA at 55 °C. amb.

Terminals are brass studs No. 10-32
with one lockwasher, flatwasher and
regular nut.

Approximate weight 4 lbs.



REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

Model 468


Catalog Number	Voltage Ratio	Turns Ratio	Rec. Primary Fuse rating
468-069	69.3:120	0.58:1	3.0
468-120	120:120	1:1	2.0
468-208	208:120	1.73:1	1.0
468-240	240:120	2:1	1.0
468-277	277:120	2.31:1	1.0
468-288	288:120	2.4:1	0.75
468-300	300:120	2.5:1	0.75
468-346	346:120	2.88:1	0.75
*468-480	*480:120	4:1	0.50
*468-600	*600:120	5:1	0.40



Model 468

Refer to model 3VT468 for 3-Phase version

- The core and coil assembly is encased in a thermoplastic shell and filled with resin.
- These transformers are designed for operation line-to-line. They may also be operated line-to-ground or line-to-neutral at reduced voltage, (58% of rated volts).
- It is desirable to use a 0.80 amp fuse in the secondary to protect the transformer.
- With two exceptions these transformer are ANSI C57.13 group 1. Those marked * are group 2.
- Models 468-380, 468-400, 468-416 designed specifically for 50Hz. operation are available with reduced performance. Consult factory for details.
- Each transformer has two plastic terminals covers.

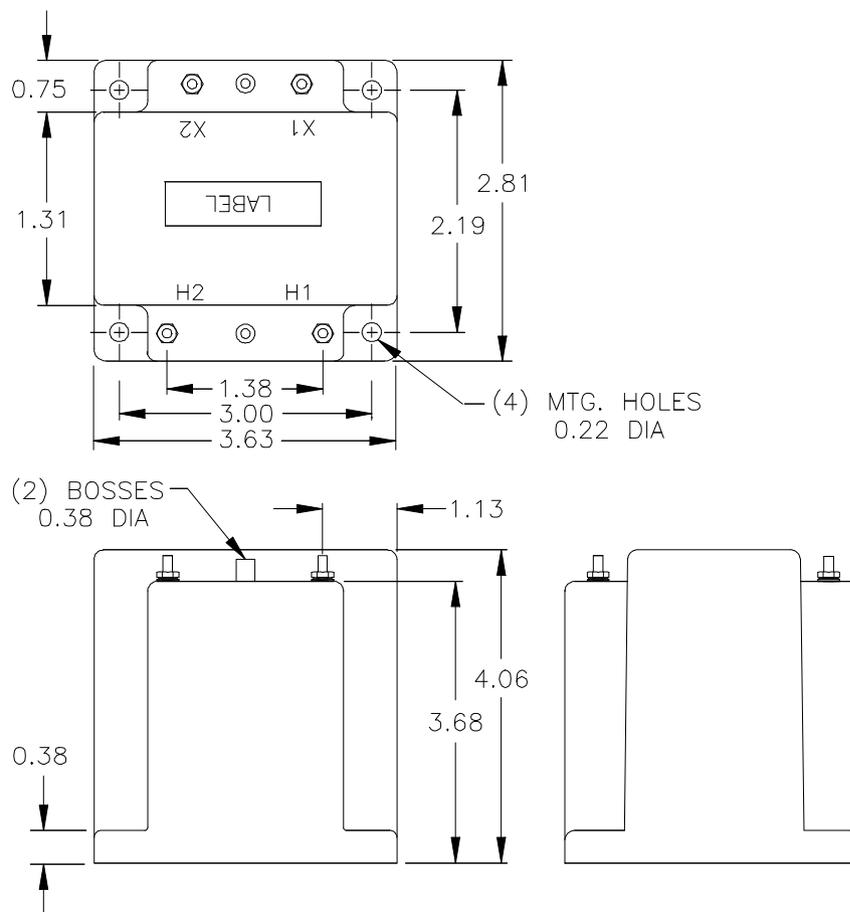

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_468-1421-2017_05-EN. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

