


Data Sheet



UPO1000CS Series Digital Oscilloscope

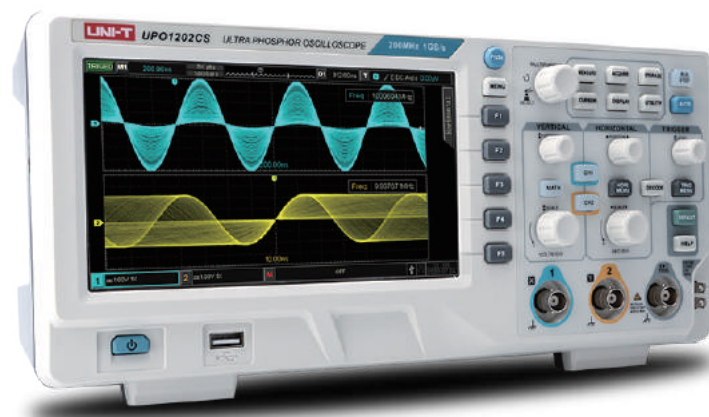

Main Features

- Analog channel bandwidth: 200MHz, 100MHz
- Number of analog channels: 2
- Storage depth of each channel: 56Mpts
- Sampling rate: 1GSa/s (non-interleaving: independent sampling per channel)
- Waveform capture rate: 500,000wfms/s
- Hardware real-time waveform uninterrupted recording of 100000 waveforms
- Ultra Phosphor super fluorescent display effect, up to 256 levels of gray display
- Support RS232, I2C, SPI, CAN and LIN trigger
- Innovative RS232, I2C, SPI, CAN and LIN hardware decoding
- Vertical scale: 1 mV/div-20 V/div
- Low background noise: <100 μ Vrms
- 64K points enhanced FFT function. Support frequency setting, waterfall diagram, detection setting and marker measurement etc.
- 36 kinds of waveform parameters can be automatically measured
- Rich trigger functions (edge, pulse width, video, slope, runt, overshoot, delay, timeout, duration, setup and hold, Nth edge and pattern trigger)
- Multi-Scopes support dual-channel independent trigger fluorescence display
- Multi-channel independent 7-bit hardware frequency counter
- DVM supports dual-channel independent AC and DC true RMS measurement
- Waveform arithmetic functions (FFT, +, -, \times , \div , digital filtering, logic operations, and advanced operations)
- Rich interfaces: USB Host、USB Device、LAN、EXT Trig、AUX Out (Trig Out、Pass/Fail)
- Support SCPI programmable instrument standard command
- Support WEB access and control
- 7" WVGA (800 \times 480) TFT LCD

Panel Structure

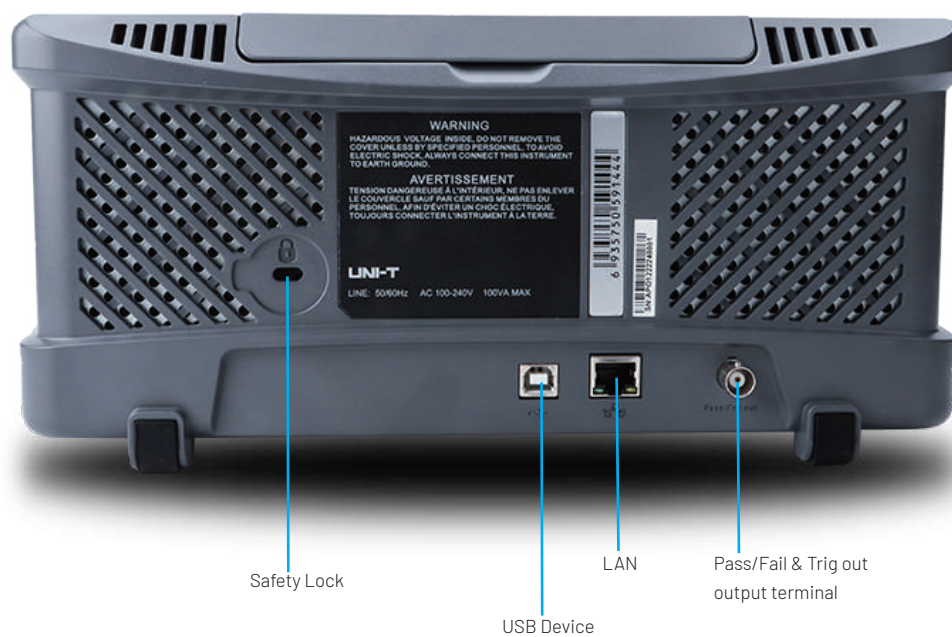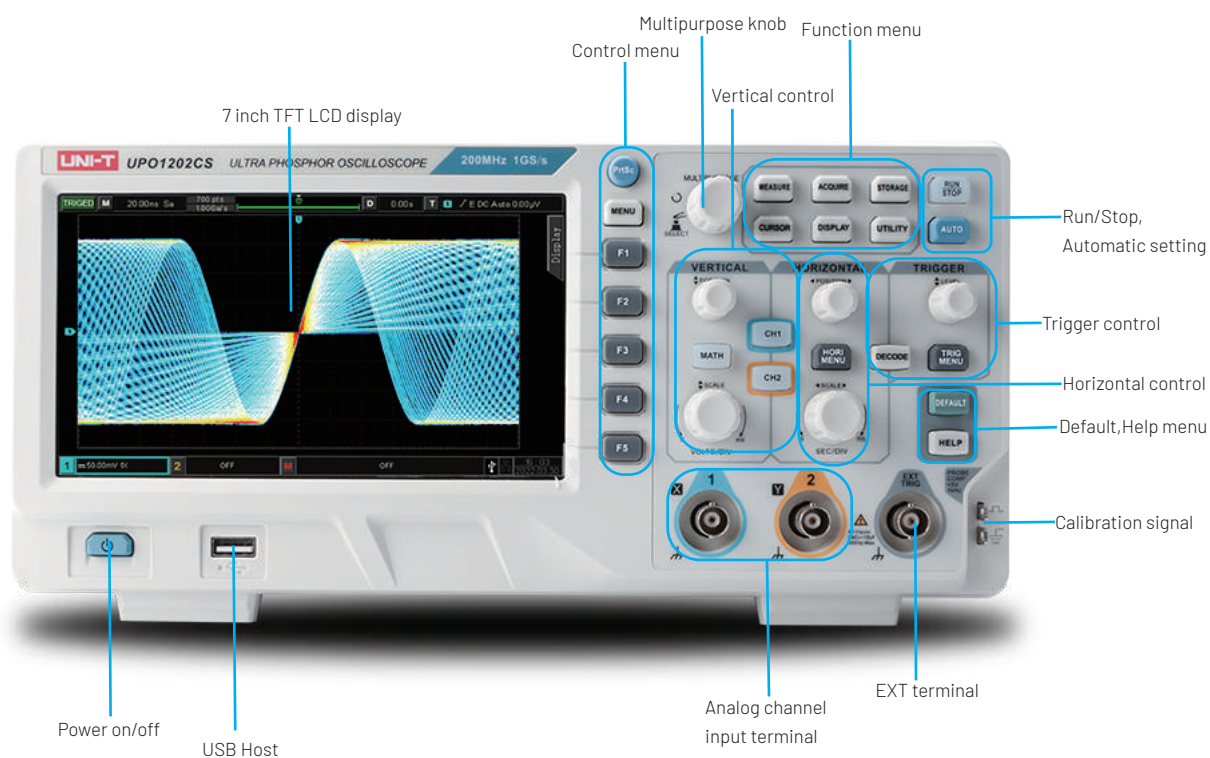


Product Introduction

UPO1000CS series is a multi-function, cost-effective digital phosphor oscilloscope. It can be widely used in the fields of electronic and electrical design, debugging, education and industrial design. UPO1000CS series adopts parallel digital signal processing technology, which greatly improves the data processing speed and waveform capture rate. The original Ultra Phosphor technology can present the cumulative effect of the tested signal as a multi-layered afterglow. Compared with traditional digital storage oscilloscopes, the persistence of digital phosphor oscilloscopes can present three-dimensional waveform data of amplitude, time and signal intensity. Fast Acquire technology can accurately capture abnormal events such as video, jitter, noise and runt signals.


256 gray level display

The original Ultra Phosphor display technology is easy to obtain more waveform information and detailed observation.

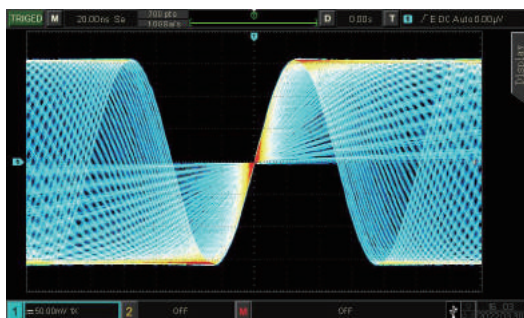


Ultra high capture rate

UPO1000CS series adopts innovative digital signal parallel processing technology. It has a very high capture rate in its peer products. Effectively reduce signal loss and help you better capture abnormal signals.

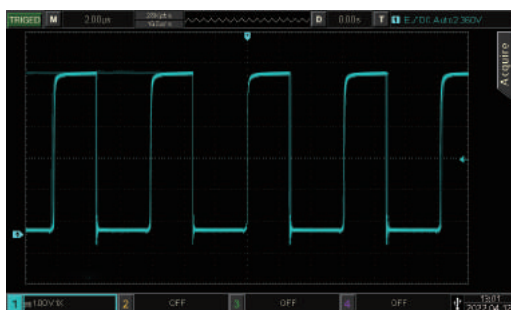


Deep storage depth

UPO1000CS series 56M sampling points per channel. This enables the oscilloscope to maintain high sampling rate in a wider time base range, At the same time considering the whole and details of the waveform, which greatly improves the ability to capture abnormal waveforms.

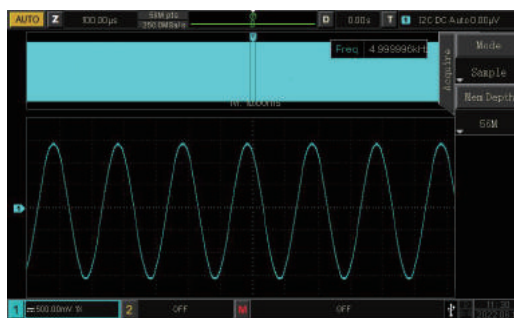


Serial bus trigger and hardware decoding

Innovative hardware decoding realizes real-time decoding. The decoding speed with deep storage 56Mpts realizes the millisecond level, which solves the problem of long-time waiting for viewing decoded data. The decoding will not affect the refresh speed of the waveform, and the waveform has the effect of digital fluorescence display. The event list can display the decoded data with deep storage and the time of the packet. These improved technologies will help you better test the serial bus.

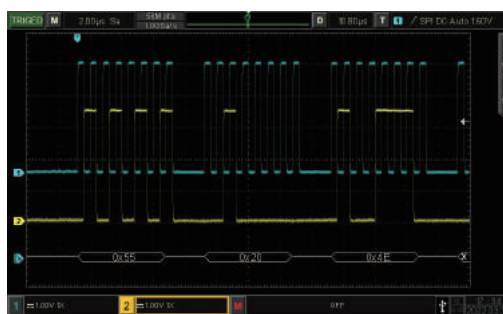

Multi-Scopes

Signals with different clock sources and large frequency difference can also display the waveform stably on the screen, which is convenient for customers to analyze the waveform parameters.

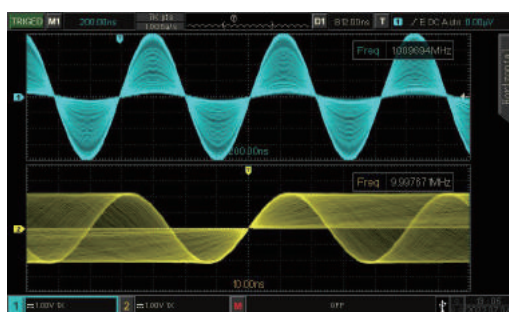

64K FFT sampling point

UP01000CS series has 64K FFT sampling points. It can also set the practical functions of spectrum analyzer such as frequency range, detection mode and spectrum marking. It is convenient for you to analyze the signal in frequency domain on oscilloscope.



Quick Selection

Model	UP0102CS	UP01102CS
Parameter		
Bandwidth	200MHz	100MHz
Analog channel	2	2
Sampling rate	1GS/s	1GS/s
Storage depth	56Mpts per channel56Mpts per channel	56Mpts per channel
Rise time	≤1.8ns	≤3.5ns
Capture rate	500,000wfms/s	500,000wfms/s
Waveform record	100,000 frames	100,000 frames

Technical Parameter

All specifications are warranted except those marked "Typical".

Unless otherwise stated, all specifications are for probes with the attenuation switch set to 10× and the UP01000CS series digital phosphor oscilloscope. To meet these specifications, an oscilloscope must first meet the following two conditions:

- The instrument must run continuously for more than 30 minutes at the specified operating temperature.
- If the operating temperature variation range reaches or exceeds 5 degrees Celsius, you must open the system function menu and execute the self-calibration function.

Sample		
Sampling methods	Real-time sampling	
Acquisition mode	Sampling, peak detection, averaging, high resolution	
Real time sampling rate	1GS/s(Each channel)	
Average	Average:2、 4、 8、 16、 32、 64、 128、 256、 512、 1024、 2048、 4096、 8192	
Memory Depth	56Mpts(Each channel)	
Input		
Channels	2	
Coupling	DC, AC, GND	
Impedance	(1MΩ± 2%) (18 pF± 3 pF)	
Probe attenuation	0.001×, 0.01×, 0.1×, 1×、 10×、 100×、 1000×、 Custom	
Max. Input voltage (1MΩ)	400V Max (DC+Vpeak)	
Vertical System		
Bandwidth (-3 dB)	UP01102CS: DC-100MHz	UP01202CS: DC-200MHz
Single bandwidth	UP01102CS: DC-100MHz	UP01202CS: DC-200MHz
Vertical Resolution	8-bit	
Vertical Scale	1mV/div -20 V/div	
Bandwidth Limit	20 MHz	
Low frequency response (AC coupling, -3dB)	≤5 Hz (On the BNC)	
Risetime	UP01102CS: ≤3.5ns	
	UP01202CS: ≤1.8ns	
	(The typical rising time of 1mV/div and 2mV/div is 2ns)	
DC Gain Accuracy	<10mV: ±4.0% full scale;	≥10mV: ±3.0% full scale;
SFDR including harmonics	Dc to maximum bandwidth: >40 dB	
Horizontal System		
Timebase Scale	UP01102CS : 2 ns/div -1000 s/div	UP01202CS : 1 ns/div -1000 s/div
Accuracy of time base	≤± (50 + 2 ×Use fixed number of year) ppm	
Scope of delay	Pre-trigger(negative delay): ≥1 screen width	Post-trigger(positive delay): 1 s to 50s
Display Format	Y-T、 X-Y、 Roll	
number of X - Y	1	

Hardware real-time waveform recording and playback	100,000 frames
Waveform Capture Rate	150,000 wfms/s 500,000 wfms/s (Fast Acquire mode)
Multi-Scopes	Quantity: 2 Support each channel independent display, and independently adjustable time base
Trigger	
Trigger level range	Inside: ± 5 Spaces from center of screen External: EXT ± 3 V
Trigger Mode	Auto, Normal, Single
Holdoff Range	80 ns to 10 s
Trigger coupling	DC: Passes all components of the signal
	AC: The direct current component that blocks the input signal
	HFRJ: Attenuates the high-frequency components above 40kHz
	LFRJ: Blocks the DC component and attenuates the low-frequency components below 40kHz
	Noise suppression: The high frequency noise in the signal is suppressed to reduce the probability of oscilloscope being triggered by mistake
Edge Trigger	
Slope	Rise, Fall, Any
Runt Set	
Pulse width conditions	>, <, <>, none
Polarity	+wid, -wid
Pulse width range	8 ns to 10 s
Window Set	
Type	Rise, Fall, Any
Trigger position	Enter, Exit, Time
Time	8 ns to 10 s
Nth Edge	
Edge type	Rise, Fall
Free time	8 ns to 10 s
Edge number	1 to 65535
Delay triggers	
Edge type	Rise, Fall
Delayed type	>, <, <>, none
Delay time	8 ns to 10 s
Timeout triggers	
Edge type	Rising, Falling, Any
Timeout	8 ns to 10 s
Pattern triggers	
Pattern Setting	H, L, X, Rise, Fall
Duration trigger	
Type set	H, L, X
Trigger condition	>, <, <>
Duration	8 ns to 10 s
Setup Hold trigger	
Edge type	Rise, Fall
Data type	H, L
Setup time	8 ns to 10 s
Hold time	8 ns to 10 s
Pulse trigger	
Polarity	+wid, -wid
Limiting conditions	>, <, <>
Pulse width	2 ns to 10 s
Slope trigger	
Conditions of the slope	Positive slope, negative slope

Limiting conditions	> < <>
Time set	8 ns to 10 s
Video Trigger	
Signal system line frequency range	Supports standard NTSC, PAL, and SECAM broadcast systems with line counts ranging from 1 to 525 (NTSC) and 1 to 625 (PAL/SECAM)
Decoding	
Types of decoding	RS232/UART, I2C, SPI, CAN (optional), LIN (optional)
Decoding the number	1
RS232 / UART trigger	
Trigger condition	Frame start, error frame, check error, data
Baud rate	2400bps, 4800bps, 9600bps, 19200bps, 38400bps, 57600bps, 115200bps, custom
Data bits wide	5 bits, 6 bits, 7 bits, 8 bits
I2C trigger	
Trigger condition	Start, Restart, Stop, loss confirmation, address, data, address data
Address bits wide	7 bits, 10 bits
Address range	0~7F, 0~3FF
Bytes	1 to 5
SPI trigger	
	0.1MΩ~10GΩ
Trigger condition	Slice selection, timeout
Free time	80 ns to 10 s
Data bits	4 bits to 32 bits
Data set	H, L, X
Edge of the clock	Rise, Fall
CAN trigger (optional)	
Signal types	Rx/Tx, CAN_H, CAN_L, difference
Trigger condition	Frame start, FRAME type, ID, DATA, ACK loss, BIT padding error, ID and data, End of frame
Signal rate	10kbps, 20kbps, 33.3kbps, 50kbps, 62.5kbps, 83.3kbps, 100kbps, 125kbps, 1Mbps, custom
Sampling point	1% to 99%
Frame type	Data frame, remote frame, error frame, overload frame
LIN trigger (optional)	
Trigger condition	Synchronization, Identifier, Data, ID and Data, Wake up frame, Sleep frame, Synchronization error, ID verification error, checksum error
Speed signal	V1, V2, Both
Bit rate	2.4kbps, 4.8kbps, 9.6kbps, 19.2kbps, Specified
Sampling point	1%~99%
Measure	
Cursor	Cursor Manual mode: Voltage difference between cursors (ΔV) Time difference between cursors (ΔT) Inverse of ΔT (Hz) ($1/\Delta T$)
	Trace mode: waveform point voltage value and time value
Allows the cursor to be displayed during automatic measurements	Allow
Automatic measurement	Max, Min, High, Low, ampli, Pk-Pk, Middle, Mean, Cycmean, RMS, CycRMS, AC RMS, Period, Freq, Rise, Fall, RiseDelay, FallDelay, +Width, -Width, FRFR, FRFF, FFFR, FFFF, FRLF, FRLR, FFLR, FFLF, +Duty, -Duty, Area, CycArea, Oversht, Presht, Phase, Pulse, a total of 36 measurement parameters;
Number of measurements	5 measurements are displayed simultaneously
Measuring range	Screen or cursor
Measurement statistics	Mean, maximum, minimum, standard deviation and number of measurements
Frequency meter	7-bit hardware frequency meter
Mathematical operations	
Waveform calculation	A+B, A-B, A×B, A/B, FFT, Editable advanced operations (Log, Exp, Sin, Cos, Tan, Sqrt, Intg, Diff), Logical operations
FFT points	64k points
FFT window type	Rectangle, Hanning, Blackman, Hamming
FFT display	Split screen, Full screen; The time base is independently adjustable
FFT vertical scale	Vrms, dBVrms

FFT	Display mode: Full screen, split screen and waterfall		
	Spectrum range Settings: start frequency, end frequency, center frequency, sweep width		
	Detection mode: Normal, average, maximum hold, minimum hold		
	Tags: Tag type, tag trace, tag maximum number of points, event list		
Digital filtering	Low pass, High pass, Band pass, Band stop		
Logical operations	and, or, not, xor		
Mathematical function	Intg、Diff、Log、Exp、Sqrt、Sine、Cosine、Tangent		
Storage			
Set	Inside and outside		
Waveform	Inside and outside		
Bitmap	External USB memory, and can store related parameter information		
Displayz			
Display type	7-inch TFT		
Resolution of display	800 ×480		
display color	24 - bit true colors		
Afterglow setting	Minimum value, 50ms, 100ms, 200ms, 500ms, 1S, 2S, 5S, 10s, 20S, infinite		
Display type	Point, vector		
Interface			
Standard	USB Host、USB Device、LAN、EXT Trig、AUX Out(Trig Out/、Pass/Fail)		
General technical specifications			
Probe compensator output			
Output voltage	About 3Vp-p		
Frequency	10Hz,100Hz,1kHz,10kHz		
Power supply			
Power supply voltage	100V~240VACrms, 50Hz/60Hz		
Power	50VA		
Fuse	3A, T class, 250V		
Environment			
Temperature range	Operation: 0℃~+40℃ No operation: -20℃~+70℃		
Cooling method	Forced fan cooling		
Humidity range	Operation: +35℃ ≤ 90% relative humidity; No operation: +35℃ to +40℃ ≤ 60% relative humidity		
Altitude	Operation: below 2000 meters; Non-operational: up to 15,000 m		
Specifications			
Size(Width x height x depth)	306mm×138mm×107mm		
weight	3.0 Kg		
Adjust the interval			
Calibration interval is recommended	1 year		
Standard			
Electromagnetic compatibility	Comply with EMC Directive (2014/30/EU), in line with or better than IEC61326-1:2021/EN61326-1:2021, IEC61326-2-1:2021/EN61326-2-1:2021		
	Conduction disturbance	CISPR 11/EN 55011	CLASS B group 1, 150kHz-30MHz
	Radiated disturbance	CISPR 11/EN 55011	CLASS B group 1, 30MHz-1GHz
	Electrostatic discharge(ESD)	IEC 61000-4-2/EN 61000-4-2	4.0 kV(contact), 8.0 kV(air)
	Radio-frequency electromagnetic field Immunity	IEC 61000-4-3/EN 61000-4-3	0V/m (80 MHz to 1 GHz) ; 3V/m (1.4 GHz to 2 GHz) ; 1V/m (2.0 GHz to 2.7GHz)
	Electrical fast transients(EFT)	IEC 61000-4-4/EN 61000-4-4	2kV(Input AC Power Ports)
	Surges	IEC 61000-4-5/EN 61000-4-5	1kV(Line to line); 2kV(Line to ground)
	Radio-frequency continuous conducted Immunity	IEC 61000-4-6/EN 61000-4-6	3V,0.15-80MHz
	Voltage dips and interruptions	IEC 61000-4-11/EN 61000-4-11	Voltage Dips: 0% UT during 1 cycle; 40% UT during 10/12 cycles; 70% UT during 25/30 cycles Short interruption: 0% UT during 250/300 cycles

Safety	EN61010-1:2010+A1:2019 BS EN61010-1:2010+A1:2019 UL61010-1:2012 Ed.3+ R:19 Jul2019 CSA C22.2#61010-1:2012 Ed.3+U1; U2; A1	EN IEC61010-2-030:2021+A11:2021 BS EN IEC61010-2-030:2021+A11:2021 UL61010-2-030:2018 Ed.2 CSA C22.2#61010-2-030:2018 Ed.2
--------	--	---



*The UP01000CS series have been certified by CE, UKCA, cETLus.

Order information



	Description	Standard Quantity per Carton	Order No.
Model	UP01102CS (100MHz, 1GSa/s, 2CH)	1	UP01102CS
	UP01202CS (200MHz, 1GSa/s, 2CH)	1	UP01202CS
Standard accessories	Power cord that conforms to the standard of the destination country	1	—
	USB data cable	1	—
	Passive probe(200MHz/100MHz)	2	UT-P05/UT-P04
Optional accessories	CAN Decoding options	—	UP01000CS-AUTO
	LIN Decoding options	—	
	High voltage probe	—	UT-V23, UT-P21
	High-Voltage Differential Probes	—	UT-P40, UT-P41, UT-P42, UT-P43, UT-P44

Note: All mainframes, accessories and options can be ordered from your local UNI-T dealer.







UNI-T oscilloscope probes and accessories supported by UP01000CS series

Passive probe

Model	Type	Description
UT-P01 	High impedance probe	1X:DC~8MHz 10X:DC~25MHz Oscilloscope compatibility: UNI-T all series
UT-P03 	High impedance probe	1X:DC~8MHz 10X:DC~60MHz Oscilloscope compatibility: UNI-T all series
UT-P04 	High impedance probe	1X:DC~8MHz 10X:DC~100MHz Oscilloscope compatibility: UNI-T all series
UT-P05 	High impedance probe	1X:DC~8MHz 10X:DC~200MHz Oscilloscope compatibility: UNI-T all series
UT-P06 	High impedance probe	1X:DC~8MHz 10X:DC~300MHz Oscilloscope compatibility: UNI-T all series
UT-P07 	High impedance probe	1X:DC~8MHz 10X:DC~500MHz Oscilloscope compatibility: UNI-T all series
UT-P08 	High impedance probe	1X:DC~8MHz 10X:DC~350MHz Oscilloscope compatibility: UNI-T all series
UT-P20 	High impedance probe	DC~100MHz Probe coefficient 100:1 Maximum operating voltage 1500Vrms Oscilloscope compatibility: UNI-T all series

Model	Type	Description
 UT-V23	High voltage probe	DC~100MHz Probe coefficient 100:1 Input resistance 100MΩ±2% Maximum operating voltage 2000Vpp Oscilloscope compatibility: UNI-T all series
 UT-P21	High voltage probe	DC~50MHz Probe coefficient 1000:1 Maximum operating voltage DC 15kVrms, AC 10kV(sine wave) Oscilloscope compatibility: UNI-T all series
 UT-P40	Current probe	DC~100kHz Range 50mV/A, 5mV/A Current range 0.4A~60A Maximum operating voltage 600Vrms Oscilloscope compatibility: UNI-T all series
 UT-P41	Current probe	DC~100kHz Range 100mV/A, 10mV/A Current range 0.4A~100A Maximum operating voltage 600Vrms Oscilloscope compatibility: UNI-T all series
 UT-P42	Current probe	DC~150kHz Range 100mV/A, 10mV/A Current range 0.4A~200A Maximum operating voltage 600Vrms Oscilloscope compatibility: UNI-T all series
 UT-P43	Current probe	DC~25MHz Range 100mV/A Maximum measurement current 20A Rise time 14ns Oscilloscope compatibility: UNI-T all series
 UT-P44	Current probe	DC~50MHz Range 50mV/A Maximum measurement current 40A Rise time 7ns Oscilloscope compatibility: UNI-T all series

Active probe

Model	Type	Description
 UT-P30	High-Voltage Differential Probes	DC~100MHz Attenuation ratio 100:1,10:1 Input differential voltage ±800Vpp Oscilloscope compatibility: UNI-T all series
 UT-P31	High-Voltage Differential Probes	DC~100MHz Attenuation ratio 1000:1,100:1 Input differential voltage ±1.5kVpp Oscilloscope compatibility: UNI-T all series
 UT-P32	High-Voltage Differential Probes	DC~50MHz Attenuation ratio 1000:1,100:1 Input differential voltage ±3kVpp Oscilloscope compatibility: UNI-T all series
 UT-P33	High-Voltage Differential Probes	DC~120MHz Attenuation ratio 100:1,10:1 Input differential voltage ±14kVpp Oscilloscope compatibility: UNI-T all series
 UT-P35	High-Voltage Differential Probes	DC~50MHz Attenuation ratio 500:1,50:1 Rise time 7ns Accuracy 2% Input differential mode voltage 1/50:130(DC+peakAC) 1/500:1300(DC+peakAC) Input common mode voltage 100Vrms, CATI 600Vrms, CATII Oscilloscope compatibility: UNI-T all series
 UT-P36	High-Voltage Differential Probes	DC~50MHz Attenuation ratio 2000:1,200:1 Rise time 3.5ns Accuracy 2% Input differential mode voltage 1/200:560(DC+peakAC) 1/2000:5600(DC+peakAC) Input common mode voltage 2800Vrms, CATI 1400Vrms, CATII Oscilloscope compatibility: UNI-T all series

Warranty

Three-years warranty, excluding probes and accessories.

Please visit https://instruments.uni-trend.com/list_190/65.html to learn more information.

To protect your investment, please purchase from UNI-T official authorized global distributors.

Find a Distributor

Find an authorized distributor here: <https://instruments.uni-trend.com/Network>

Contact UNI-T

E-mail: info@uni-trend.com

Test & Measurement Instruments Website: instruments.uni-trend.com

UNI-T Corporate Website: www.uni-trend.com

UNI-T group maintains a wide products category includes Digital Test & Measurement instruments, Field Testing Meter, Infrared thermal imaging products. As early as 2008, we continue to introduce self-developed Digital Test and Measurement instruments to the market and have made remarkable achievements. At present, we have formed a variety of product lines of Oscilloscope, AWG, Spectrum Analyzer, Bench Multi-meter, Power Supply, DC Load, Power Meter, LCR Meter, Micro Ohm Meter and Data logger. We have separated instruments sub-sites, instruments.uni-trend.com, on the basis of the original website www.uni-trend.com, in order to be more targeted to provide customers with better service and value.

UNIT/MKT-TMI-SC/AL-2209-039

Instrument.uni-trend.com

UNI-T®