


PANEL

METERS



YOKOGAWA

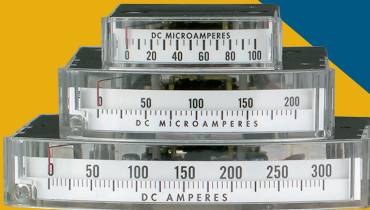

YOKOGAWA Supplies A Complete Line of Precise Panel Meters . . .



Elapsed Time Meters

Devices will match the frequency of AC power systems. Six-digit counters record hours, tenths of hours, minutes and tenths of minutes. Reset or non-reset models available.




Horizon Line Panel Meters

These meters possess the same precision qualities as New Big Look. In addition, Horizon Line panel meters can be front or rear mounted on panel.




New Big Look Panel Meters

These meters feature extra-wide scales, big bold numerals above the scale and divisions for unobstructed reading. Tapered needle-sharp pointers and shadow-free acrylic covers help to pinpoint values. Available in taut band and pivot and jewel types. Gasket sealer gives New Big Look dust and moisture resistant design. (Except 1½").

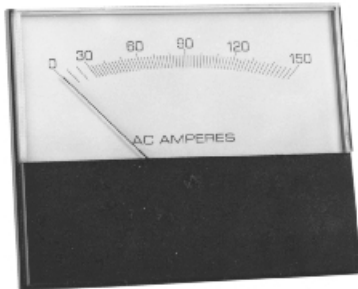


Stylist Series Panel Meters

Available in Window mount or Surface mount styles. Optional bezels for Surface mount permit rear panel mounting. Standard movement torque to weight ratio is approximately 4 times greater than most other manufacturer's high torque versions.

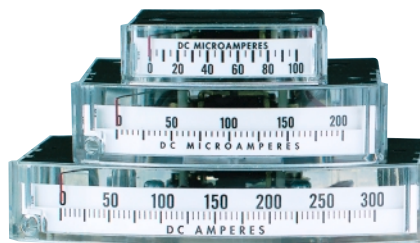


Thin edgewise meters

Our thin element design provides the maximum performance in the smallest of spaces. Available in 1½" to 3½" sizes for vertical or horizontal mounting.




Edgewise Meters

YOKOGAWA's answer to the squeeze for space problem. This design allows meters to be mounted vertically or horizontally. They can stand alone or be stacked in space-saving clusters. Built-in magnetic shielding prevents interference among meters and removes the burden of special calibration.




YOKOGAWA Offers These Advantages . . .

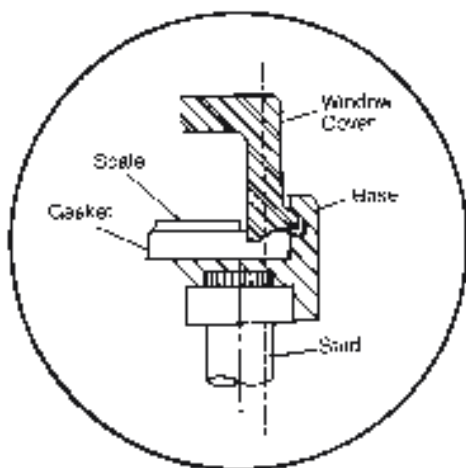


Gasket Sealing Design Establishes A New Industry Standard

Dust resistant construction is now a standard feature of all New Big Look panel meters 2½"-4½" only. YOKOGAWA's unique gasket sealing design eliminates the need for a crimped bezel, providing for quick modification and scale changes while maintaining the integrity of the meters.

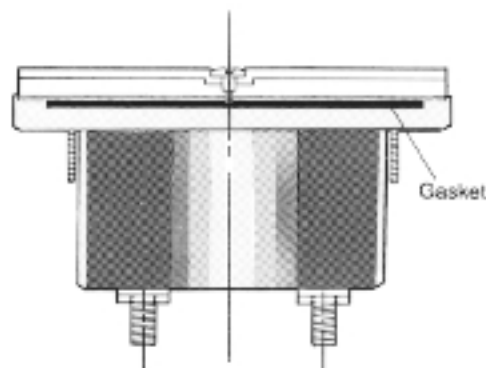


Dust Resistant Construction

YOKOGAWA Big Look panel meters, except 1½", feature gasketed construction to seal out dust and other air-suspended damaging particles. Application is ideal for adverse environments. Special dust resistant features are included on all YOKOGAWA New Big Look meters, (except 1½"). For more severe applications, to meet UL-1437 or IEC 144 requirements, other models are also available upon request.

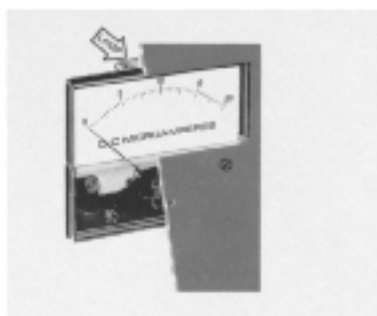

Back-Of-Panel Mounting For Horizon Line

Horizon Line panel meters can be mounted either behind or in front of the panel. Behind-panel mounting is easy . . . just remove snap-off mask and mount. No special mounting hardware or bezel is required. This design feature improves panel appearance . . . saves time and money. When illuminated scales are required, simply position light source as shown, or in any suitable position along the edge of the instrument.

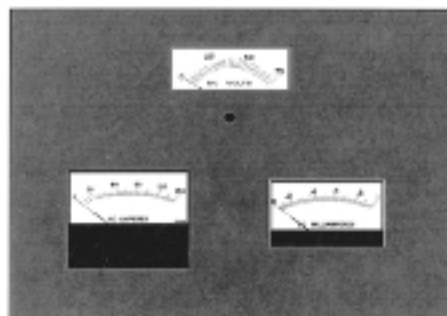


Three Mounting Types Available in Stylist Series

Rear Panel Window Mount

Front of Panel Surface Mount

Rear Panel Surface Mount Available with Optional Bezel

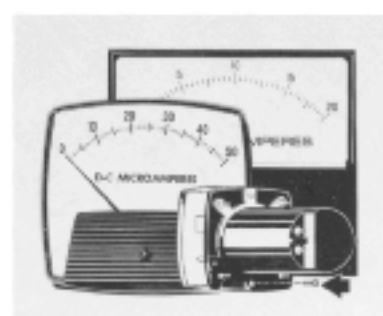

Clean, Readable Case Design Provides Extra Safety

YOKOGAWA's brand New Big Look and Horizon Line panel meters are designed to provide attractive styling, quick, sure readability for any application . . . and a built in safety feature to help you meet national safety requirements. If you must remove the acrylic cover, you have to remove the instrument itself from the panel in order to reach the special safety screws holding on the cover. Removing the meter prevents shock hazard. This safety feature is standard on all New Big Look and Horizon Line meters.

New Big Look, Horizon Line and Stylist Panel Meters

Suspension

Taut Band

Taut band is a means of suspending the moving mechanism between two ribbons of metal, obviating the need for pivots, jewels and control springs found in conventional mechanisms. The absence of friction resulting from this permits greater sensitivities and provides more rugged meters. Common failures of conventional meters subjected to shock testing are cracked jewels and/or blunted pivots. Taut band, without pivot and jewels, consequently, will withstand shock in excess of that specified for pivot and jewel meters. For example, ANSI Specifications for panel meters require 50G shock. Taut-band meters will withstand 100G shock.

Pivot and Jewel

In this design the coil and pointer are supported by polished steel pivots at each end which fit into jewel bearings. Pivot and jewel meters are recommended for high-vibration environments because of the mechanism's inherent stability and strength. Accuracy and repeatability are almost equal to the taut-band's, and good performance from the pivot and jewel construction is the reason for its long popularity. Don't specify pivot and jewel meters for applications that involve high shock, but do take advantage of this meter's ability to withstand vibration.

High-sensitivity DC Voltmeters

Standard DC voltmeter sensitivity is 1000 ohms/volt. Expressed differently, 1000 ohms/volt sensitivity means that the meter draws approximately one milliamp full-scale current.

Occasionally lower current drains are necessary, hence higher sensitivities may be required. The table below compares available sensitivities, maximum self-contained voltages, and approximate full-scale currents. The voltage range could be extended by using external resistors.

Maximum and Minimum Ratings

In general, the maximum and minimum ratings of current and voltage are those listed in "Ratings." Listed are rating limits for self-contained meters.

Ratings greater than those listed can be accomplished by use of external shunts, resistors or transformers. Meters to be used with external accessories are shown in "Ratings." See page 29 for Shunts, resistors and Transformers.

Expanded-scale Voltmeters

For very close monitoring of voltages, Zener diode expanded scale voltmeters are available in 3½- and 4½-inch sizes for AC and DC ratings. Accuracy is $\pm 0.5\%$ of full-scale value. Standard voltage spans are listed in "Ratings."

Expanded scale voltmeters can be furnished for any mid-span values from 12 to 300 volts. Minimum span is 16% of mid-span value.

Frequency Effect — AC Meters

Iron vane voltmeters are sensitive to frequency and should not be used on frequencies other than design frequency. (Standard voltmeters are calibrated at 60 Hertz. Used at 50 Hertz, accuracy becomes $\pm 2\%$. There are also 150- and 300-volt ratings listed which are calibrated at 400 Hertz). For calibrations at frequencies other than 60 and 400 Hertz, refer to factory.

All Iron-vane ammeters (which produce a conventional scale distribution with divisions crowded in lower third of scale) from 10 milliamperes to 50 amperes are virtually unaffected by a change in frequency; e.g., a stock ammeter (calibrated at 60 Hertz) when used at 400 Hertz incurs an additional error of only .5 percent full-scale. If used on 1000 Hertz, the additional error is 4 percent. We recommend use of stock (60 Hertz) ammeters on any frequency in the range of 25 Hertz to 400 Hertz. For calibration at frequencies outside the 25-Hertz to 400-Hertz range, refer to factory or use a rectifier-type AC ammeter.

Rectifier-type Meters

Rectifier-type meters differ from iron-vane mechanisms in that:

- They provide a nominally linear (DC) scale rather than conventional iron-vane distribution which has a slight crowding at low end of scale.

- AC current measurements of microamperes and milliamperes at minimum power consumption are permitted.

- AC voltmeters of higher sensitivity (ohms/volt) than iron-vane types can be made.

- Frequency response of rectifier type meters is essentially flat from 20 to 1,000 Hertz (1% effect from reference to 60 Hertz). Rectifier-type meters employ a full-wave rectifier and are available in ratings of 500µA to 30A.

Suppressed-zero DC Meters

DC meters can be mechanically suppressed up to 20% of end-scale value. However, additional errors are introduced by suppressions; e.g.,

Errors at 20% suppression = $\pm 3\%$ of end-scale

Many process transmitters in use today provide a 4-20mA signal (occasionally 10-50 mA or 1-5mA) and require a suppressed-zero meter with operating zero set. These are known as "live-zero" and are standard.

Higher Accuracy

Standard calibration accuracy is $\pm 2\%$ of full scale. DC meters can be calibrated to $\pm 1\%$ of full scale as a special model in 3½" and 4½" with mirrored scale.

Conduit Mounting Case — 2½-inch New Big Look Meter

Available only for 2½-inch Type 250 panel meters, for indoor or outdoor use, the conduit-mounted case provides protection to the meter under severe environmental conditions. The conduit case is both sealed and weatherproof and is pre-drilled, ready for mounting of separately ordered panel meters. Assembly of meter into case is done by purchaser. (Drawing No. 2579K10700.)

Data subject to change without notice.

MINIMUM RATING

SERIES	STYLIST				BIG LOOK & HORIZON LINE			
SIZE/RATING	1½	2½	3½	4½	1½	2½	3½	4½
DC CURRENT	10µA				20µA			50µA
DC VOLTAGE	50mV				50mV			
AC CURRENT (IRON VANE)	---	10mA			---	10mA		
AC VOLTAGE (IRON VANE)	---	3V			---	3V		
AC CURRENT (RECTIFIER)	1mA				500µA			
AC VOLTAGE (RECTIFIER)	3V				10V			

MAXIMUM RATING

DC CURRENT	10A	50A	15A	30A	50A
DC VOLTAGE	1000V		300V		600V
AC CURRENT (IRON VANE)	---	50A	---	30A	80A
AC VOLTAGE (IRON VANE)	---	600V	---	300V	600V
AC CURRENT (RECTIFIER)	100mA	30A	20mA		
AC VOLTAGE (RECTIFIER)	600V		150V		300V





Table of Contents

	New Big Look	Horizon Line	Stylist	Elapsed Time	185 Edgewise	280 Edgewise
DC Voltmeters	2-3	8	14		26	27
DC Ammeters	3-5	8-10	15-16		26	28
DC Microammeters	3	8-9	15		26	28
DC Milliammeters	4	9	15		26	28
AC Voltmeters	5-6	10-11	17		26	28
AC Ammeters	6-7	11-12	17-19			28
AC Microammeters	6	11			26	28
AC Milliammeters	6	12	17, 18		26	28
AC Frequency Meters	13	13	19			
AC Motor Load Indicators	12	12				
Expanded Scale Voltmeters	3,5	8, 11	14, 17			
Elapsed Time Meters				24-25		
Terminal Resistance Values	20-21	20-21	22-23		26	27-28
Cross Reference to Other Manufacturers	32	32	32			
Electrical and Physical Options	30-31	30-31	30-31		30-31	30-31
Parts & Accessories	29	29	29		25, 29	27, 29
Dimensional Drawings	32-33	34-35	36	38, 39	37	38

Key to 200-Prefix Catalog Numbers

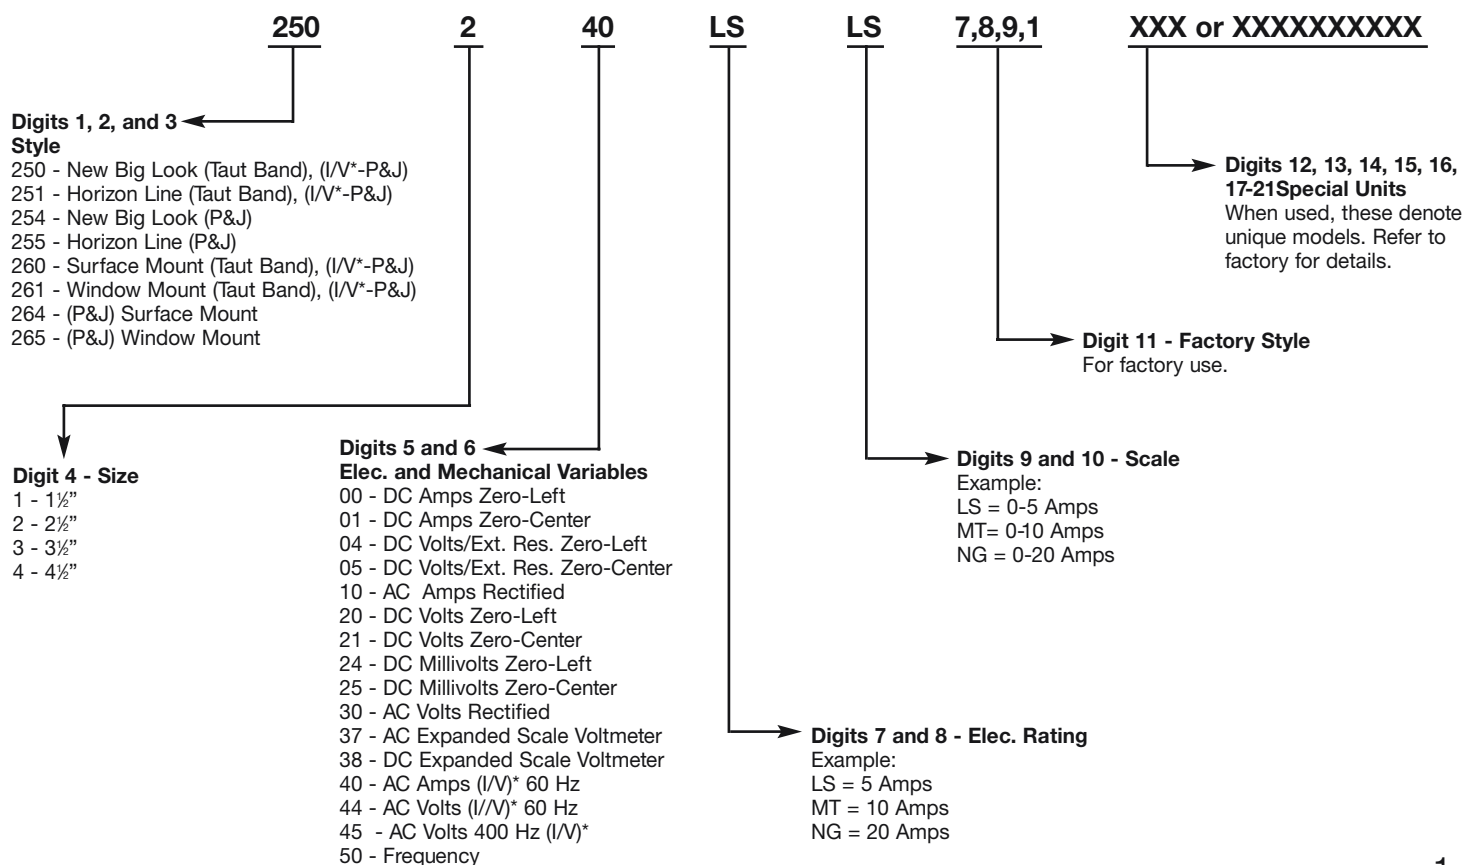

*I/V = Iron Vane Mechanism



Type 250 and 254
New Big Look

Specifications

Accuracy: All DC and AC iron-vane; $\pm 2\%$ of full-scale AC rectifier type; $\pm 3\%$ of full scale (with 60 Hz sine wave at 25° C). When standard 60 Hz iron vane ammeters are used at the extreme limits of 25 or 400 Hz, additional error (approx. .75%) may be experienced. Expanded-scale voltmeters: $\pm .5\%$ of full scale value.

ANSI Specification: All meters meet ANSI Specifications C-39.1

Overload: Voltmeters (AC and DC) - 50% momentary, 20% sustained. Ammeters (AC and DC) momentary; 10 times the rated current for 10 consecutive intervals of .5 second with a 1 minute interval between successive applications; sustained: 20% for six hours.

Scale Data: 90 degree rotation.

Scale Length:

Size	New Big Look
1½"	1.40"
2½"	2.06"
3½"	2.88"
4½"	3.93"

Insulation Level: All meters (except 1½"), 2600 Vrms Hi-pot, 1½"-1500 Vrms Hi-pot.

Burden Data: AC ammeter-5 amps, 0.5 va, Max. 0.5 power-factor lagging @ 60 Hz. AC voltmeter - unity power factor.

Response Time and Overshoot:

Response time: 3 seconds (max.) for 2½", 3½", 4½" size for microammeters; 2 seconds (max.) for all other DC ratings, and 2.5 seconds (max) for AC ratings. Maximum of 40% overshoot.

Dimensions: See page 32-33

How To Order

To order New Big Look panel meters use the appropriate catalog numbers provided in the tables. Taut band & AC I/V instruments have a 250 prefix number. Pivot & Jewel instruments have a prefix of 254.

Ordering Examples:

- 2½", 300 V DC Voltmeter, zero left, taut band - 250 220 RXRX
- 2½", 300 V DC Voltmeter, zero left, pivot & jewel, 254 style - 254 220 RXRX
- 2½", 300 V AC (Iron Vane), pivot & jewel - 250244 RXRX

Notes:

Pivot & jewel instruments are not available in 1½" size.

Severe-duty meters are available to meet CSA, UL 1437 and IEC 144 requirements. **UL/CSA version, with flame retardant window and base, is not offered in 1½".** IEC version is not offered in 1½" and 4½". To order, add /CSA, /UL or IEC after catalog number, or contact factory.

For ratings and scales not listed contact factory.

DC Voltmeters


Size	1½"	2½"		3½"		4½"	
Rating & Scale	Type	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel

DC VOLTMETERS — ZERO-LEFT

1.0 Volts	250 120 LALA	250 220 LALA	254 220 LALA	250 320 LALA	254 320 LALA	250 420 LALA	254 420 LALA
1.5 Volts	250 120 LCLC	250 220 LCLC	254 220 LCLC	250 320 LCLC	254 320 LCLC	250 420 LCLC	254 420 LCLC
3 Volts	250 120 LJLJ	250 220 LJLJ	254 220 LJLJ	250 320 LJLJ	254 320 LJLJ	250 420 LJLJ	254 420 LJLJ
5 Volts	250 120 LSLS	250 220 LSLS	254 220 LSLS	250 320 LSLS	254 320 LSLS	250 420 LSLS	254 420 LSLS
8 Volts	250 120 MJMJ	250 220 MJMJ	254 220 MJMJ	250 320 MJMJ	254 320 MJMJ	250 420 MJMJ	254 420 MJMJ
10 Volts	250 120 MTMT	250 220 MTMT	254 220 MTMT	250 320 MTMT	254 320 MTMT	250 420 MTMT	254 420 MTMT
15 Volts	250 120 NDND	250 220 NDND	254 220 NDND	250 320 NDND	254 320 NDND	250 420 NDND	254 420 NDND
30 Volts	250 120 NLNL	250 220 NLNL	254 220 NLNL	250 320 NLNL	254 320 NLNL	250 420 NLNL	254 420 NLNL
40 Volts	250 120 NPNP	250 220 NPNP		250 320 NPNP		250 420 NPNP	
50 Volts	250 120 NTNT	250 220 NTNT	254 220 NTNT	250 320 NTNT	254 320 NTNT	250 420 NTNT	254 420 NTNT
80 Volts	250 120 PDPD	250 220 PDPD	254 220 PDPD	250 320 PDPD	254 320 PDPD	250 420 PDPD	254 420 PDPD
100 Volts	250 120 PKPK	250 220 PKPK	254 220 PKPK	250 320 PKPK	254 320 PKPK	250 420 PKPK	254 420 PKPK
150 Volts	250 120 PZPZ	250 220 PZPZ	254 220 PZPZ	250 320 PZPZ	254 320 PZPZ	250 420 PZPZ	254 420 PZPZ
200 Volts	250 120 RLRL	250 220 RLRL	254 220 RLRL	250 320 RLRL	254 320 RLRL	250 420 RLRL	254 420 RLRL
250 Volts	250 120 RSRS	250 220 RSRS	254 220 RSRS	250 320 RSRS	254 320 RSRS	250 420 RSRS	254 420 RSRS
300 Volts	250 120 RXRX	250 220 RXRX	254 220 RXRX	250 320 RXRX	254 320 RXRX	250 420 RXRX	254 420 RXRX
500 Volts				250 320 SFSE	254 320 SFSE	250 420 SFSE	254 420 SFSE
600 Volts				250 320 SJSJ	254 320 SJSJ	250 420 SJSJ	254 420 SJSJ

DC VOLTMETERS — ZERO-LEFT, RATED 0-1 mA DC, FOR USE WITH EXTERNAL RESISTORS. RESISTORS NOT INCLUDED (SEE PAGE 29 FOR RESISTORS)

500 Volts	250 104 FASF	250 204 FASF	254 204 FASF				
600 Volts	250 104 FASJ	250 204 FASJ	254 204 FASJ				
750 Volts	250 104 FASM	250 204 FASM	254 204 FASM	250 304 FASM	254 304 FASM	250 404 FASM	254 404 FASM



DC Voltmeters Cont'd

Size	1½	2½		3½		4½	
Type Rating & Scale	Taut Band	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel

DC VOLTMETERS — ZERO-CENTER

5-0-5 Volts	250 121 LSLS	250 221 LSLS	254 221 LSLS	250 321 LSLS	254 321 LSLS	250 421 LSLS	254 421 LSLS
10-0-10 Volts	250 121 MTMT	250 221 MTMT	254 221 MTMT	250 321 MTMT	254 321 MTMT	250 421 MTMT	254 421 MTMT
30-0-30 Volts	250 121 NLNL	250 221 NLNL	254 221 NLNL	250 321 NLNL	254 321 NLNL	250 421 NLNL	254 421 NLNL
50-0-50 Volts	250 121 NTNT	250 221 NTNT	254 221 NTNT	250 321 NTNT	254 321 NTNT	250 421 NTNT	254 421 NTNT
80-0-80 Volts	250 121 PDPD	250 221 PDPD	254 221 PDPD	250 321 PDPD	254 321 PDPD	250 421 PDPD	254 421 PDPD
150-0-150 Volts	250 121 PZPZ	250 221 PZPZ	254 221 PZPZ	250 321 PZPZ	254 321 PZPZ	250 421 PZPZ	254 421 PZPZ
300-0-300 Volts	250 121 RXRX	250 221 RXRX	254 221 RXRX	250 321 RXRX	254 321 RXRX	250 421 RXRX	254 421 RXRX
500 -0-500 Volts				250 321 SF SF	254 321 SF SF	250 421 SF SF	254 421 SF SF
600-0-600 Volts				250 321 SJSJ	254 321 SJSJ	250 421 SJSJ	254 421 SJSJ

DC VOLTMETERS — EXPANDED SCALE

24-30 Volts				250 338 NNNN	254 338 NNNN	250 438 NNNN	254 438 NNNN
110-130 Volts				250 338 PNP	254 338 PNP	250 438 PNP	254 438 PNP
220-260 Volts				250 338 RTRT	254 338 RTRT	250 438 RTRT	254 438 RTRT

DC VOLTMETERS — ZERO-CENTER, RATED 1-0-1 mA DC, FOR USE WITH EXTERNAL RESISTORS, RESISTORS NOT INCLUDED (SEE PAGE 29 FOR RESISTORS)

SCALY

500-0-500 Volts	250 105 FASF	250 205 FASF	254 205 FASF				
600-0-600 Volts	250 105 FASJ	250 205 FASJ	254 205 FASJ				
750-0-750 Volts	250 105 FASM	250 205 FASM	254 205 FASM	250 305 FASM	254 305 FASM	250 405 FASM	254 405 FASM

DC Ammeters

DC MICROAMMETERS — ZERO-LEFT

20 µA	250 100 CFCF	250 200 CFCF		250 300 CFCF			
50 µA	250 100 CYCY	250 200 CYCY		250 300 CYCY		250 400 CYCY	
100 µA	250 100 DRDR	250 200 DRDR		250 300 DRDR		250 400 DRDR	
200 µA	250 100 EAEA	250 200 EAEA	254 200 EAEA	250 300 EAEA	254 300 EAEA	250 400 EAEA	254 400 EAEA
500 µA	250 100 EMEM	250 200 EMEM	254 200 EMEM	250 300 EMEM	254 300 EMEM	250 400 EMEM	254 400 EMEM

DC MICROAMMETERS — ZERO-CENTER

20-0-20 µA	250 101 CFCF	250 201 CFCF		250 301 CFCF			
50-0-50 µA	250 101 CYCY	250 201 CYCY		250 301 CYCY		250 401 CYCY	
100-0-100 µA	250 101 DRDR	250 201 DRDR	254 201 DRDR	250 301 DRDR	254 301 DRDR	250 401 DRDR	254 401 DRDR
200-0-200 µA	250 101 EAEA	250 201 EAEA	254 201 EAEA	250 301 EAEA	254 301 EAEA	250 401 EAEA	254 401 EAEA
500-0-500 µA	250 101 EMEM	250 201 EMEM	254 201 EMEM	250 301 EMEM	254 301 EMEM	250 401 EMEM	254 401 EMEM

DC MICROAMMETERS — ZERO-LEFT

1 mA	250 100 FAFA	250 200 FAFA	254 200 FAFA	250 300 FAFA	254 300 FAFA	250 400 FAFA	254 400 FAFA
5 mA	250 100 FXFX	250 200 FXFZ	254 200 FXFX	250 300 FXFX	254 300 FXFX	250 400 FXFX	254 400 FXFX
10 mA	250 100 GZGZ	250 200 GZGZ	254 200 GZGZ	250 300 GZGZ	254 300 GZGZ	250 400 GZGZ	254 400 GZGZ
20 mA	250 100 HFHF	250 200 HFHF	254 200 HFHF	250 300 HFHF	254 300 HFHF	250 400 HFHF	254 400 HFHF
25 mA	250 100 HJHJ	250 200 HJHJ	254 200 HJHJ	250 300 HJHJ	254 300 HJHJ	250 400 HJHJ	254 400 HJHJ
30 mA	250 100 HMHM	250 200 HMHM	254 200 HMHM	250 300 HMHM	254 300 HMHM	250 400 HMHM	254 400 HMHM
50 mA	250 100 HYHY	250 200 HYHY	254 200 HYHY	250 300 HYHY	254 300 HYHY	250 400 HYHY	254 400 HYHY
80 mA	250 100 JJJJ	250 200 JJJJ	254 200 JJJJ	250 300 JJJJ	254 300 JJJJ	250 400 JJJJ	254 400 JJJJ
100 mA	250 100 JRJR	250 200 JRJR	254 200 JRJR	250 300 JRJR	254 300 JRJR	250 400 JRJR	254 400 JRJR
150 mA	250 100 JXJX	254 200 JXJX	254 200 JXJX	250 300 JXJX	254 300 JXJX	250 400 JXJX	254 400 JXJX
200 mA	250 100 KAKA	250 200 KAKA	254 200 KAKA	250 300 KAKA	254 300 KAKA	250 400 KAKA	254 400 KAKA
250 mA	250 100 KD KD	250 200 KD KD	254 200 KD KD	250 300 KD KD	254 300 KD KD	250 400 KD KD	254 400 KD KD
300 mA	250 100 KGKG	250 200 KGKG	254 200 KGKG	250 300 KGKG	254 300 KGKG	250 400 KGKG	254 400 KGKG
500 mA	250 100 KMKM	250 200 KMKM	254 200 KMKM	250 300 KMKM	254 300 KMKM	250 400 KMKM	254 400 KMKM
800 mA	250 100 KWKW	250 200 KWKW	254 200 KWKW	250 300 KWKW	254 300 KWKW	250 400 KWKW	254 400 KWKW

DC Ammeters Cont'd

Size	1½	2½		3½		4½	
Type Rating & Scale	Taut Band	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel

DC MILLIAMMETERS — ZERO-CENTER

1-0-1 mA	250 101 FAFA	250 201 FAFA	254 201 FAFA	250 301 FAFA	254 301 FAFA	250 401 FAFA	254 401 FAFA
5-0-5 mA	250 101 FXFX	250 201 FXFX	254 201 FXFX	250 301 FXFGX	254 301 FXFX	250 401 FXFX	254 401 FXFX
10-0-10 mA	250 101 GZGZ	250 201 GZGZ	254 201 GZGZ	250 301 GZGZ	254 301 GZGZ	250 401 GZGZ	254 401 GZGZ
20-0-20 mA	250 101 HFHF	250 201 HFHF	254 201 HFHF	250 301 HFHF	254 301 HFHF	250 401 HFHF	254 401 HFHF
25-0-25 mA	250 101 HJHJ	250 201 HJHJ	254 201 HJHJ	250 301 HJHJ	254 301 HJHJ	250 401 HJHJ	254 401 HJHJ
30-0-30 mA	250 101 HMHM	250 201 HMHM	254 201 HMHM	250 301 HMHM	254 301 HMHM	250 401 HMHM	254 401 HMHM
50-0-50 mA	250 101 HYHY	250 201 HYHY	254 201 HYHY	250 301 HYHY	254 301 HYHY	250 401 HYHY	254 401 HYHY
100-0-100 mA	250 101 JRJR	250 201 JRJR	254 201 JRJR	250 301 JRJR	254 301 JRJR	250 401 JRJR	254 401 JRJR
150-0-150 mA	250 101 JXJX	250 201 JXJX	254 201 JXJX	250 301 JXJX	254 301 JXJX	250 401 JXJX	254 401 JXJX
200-0-200 mA	250 101 KAKA	250 201 KAKA	254 201 KAKA	250 301 KAKA	254 301 KAKA	250 401 KAKA	254 401 KAKA
250-0-250 mA	250 101 KDKD	250 201 KDKD	254 201 KDKD	250 301 KDKD	254 301 KDKD	250 401 KDKD	254 401 KDKD
300-0-300 mA	250 101 KGKG	250 201 KGKG	254 201 KGKG	250 301 KGKG	254 301 KGKG	250 401 KGKG	254 401 KGKG
500-0-500 mA	250 101 KMKM	250 201 KMKM	254 201 KMKM	250 301 KMKM	254 301 KMKM	250 401 KMKM	254 401 KMKM

DC AMMETERS — ZERO-LEFT

1 Amp	250 100 LALA	250 200 LALA	254 200 LALA	250 300 LALA	254 300 LALA	250 400 LALA	254 400 LALA
1.5 Amp	250 100 LCLC	250 200 LCLC	254 200 LCLC	250 300 LCLC	254 300 LCLC	250 400 LCLC	254 400 LCLC
2 Amp	250 100 LELE	250 200 LELE	254 200 LELE	250 300 LELE	254 300 LELE	250 400 LELE	254 200 LELE
3 Amp	250 100 LJLJ	250 200 LJLJ	254 200 LJLJ	250 300 LJLJ	254 300 LJLJ	250 400 LJLJ	254 400 LJLJ
5 Amp	250 100 LSLs	250 200 LSLs	254 200 LSLs	250 300 LSLs	254 300 LSLs	250 400 LSLs	254 400 LSLs
10 Amp	250 100 MTMT	250 200 MTMT	254 200 MTMT	250 300 MTMT	254 300 MTMT	250 400 MTMT	254 400 MTMT
15 Amp	250 100 NDND	250 200 NDND	254 200 NDND	250 300 NDND	254 300 NDND	250 400 NDND	254 400 NDND
20 Amp		250 200 NGNG	254 200 NGNG	250 300 NGNG	254 300 NGNG	250 400 NGNG	254 400 NGNG
30 Amp		250 200 NLNL	254 200 NLNL	250 300 NLNL	254 300 NLNL	250 400 NLNL	254 400 NLNL
50 Amp				250 300 NTNT	254 300 NTNT	250 400 NTNT	254 400 NTNT

DC AMMETERS — ZERO-LEFT, 50 mV, SHUNT RATED (LEAD RES. RANGE: .05-.07Ω)*

SCALY


20 Amp	250 124 ECNG	250 224 ECNG	254 224 ECNG	250 324 ECNG	254 324 ECNG	250 424 ECNG	254 424 ECNG
30 Amp	250 124 ECNL	250 224 ECNL	254 224 ECNL	250 324 ECNL	254 324 ECNL	250 424 ECNL	254 424 ECNL
50 Amp	250 124 ECNT	250 224 ECNT	254 224 ECNT	250 324 ECNT	254 324 ECNT	250 424 ECNT	254 424 ECNT
75 Amp	250 124 ECPB	250 224 ECPB	254 224 ECPB	250 324 ECPB	254 324 ECPB	250 424 ECPB	254 424 ECPB
100 Amp	250 124 ECPK	250 224 ECPK	254 224 ECPK	250 324 ECPK	254 324 ECPK	250 424 ECPK	254 424 ECPK
150 Amp	250 124 ECPZ	250 224 ECPZ	254 224 ECPZ	250 324 ECPZ	254 324 ECPZ	250 424 ECPZ	254 424 ECPZ
200 Amp	250 124 ECRL	250 224 ECRL	254 224 ECRL	250 324 ECRL	254 324 ECRL	250 424 ECRL	254 424 ECRL
250 Amp	250 124 ECRS	250 224 ECRS	254 224 ECRS	250 324 ECRS	254 324 ECRS	250 424 ECRS	254 424 ECRS
300 Amp	250 124 ECRX	250 224 ECRX	254 224 ECRX	250 324 ECRX	254 324 ECRX	250 424 ECRX	254 424 ECRX
400 Amp	250 124 ECSC	250 224 ECSC	254 224 ECSC	250 324 ECSC	254 324 ECSC	250 424 ECSC	254 424 ECSC
500 Amp	250 124 ECSF	250 224 ECSF	254 224 ECSF	250 324 ECSF	254 324 ECSF	250 424 ECSF	254 424 ECSF
600 Amp	250 124 ECSJ	250 224 ECSJ	254 224 ECSJ	250 324 ECSJ	254 324 ECSJ	250 424 ECSJ	254 424 ECSJ
800 Amp	250 124 ECSN	250 224 ECSN	254 224 ECSN	250 324 ECSN	254 324 ECSN	250 424 ECSN	254 424 ECSN
1 Kiloamp	250 124 ECVA	250 224 ECVA	254 224 ECVA	250 324 ECVA	254 324 ECVA	250 424 ECVA	254 424 ECVA
1.5 Kiloamp	250 124 ECVC	250 224 ECVC	254 224 ECVC	250 324 ECVC	254 324 ECVC	250 424 ECVC	254 424 ECVC
2 Kiloamp	250 124 ECVE	250 224 ECVE	254 224 ECVE	250 324 ECVE	254 324 ECVE	250 424 ECVE	254 424 ECVE

DC AMMETERS — ZERO-LEFT, 100 mV, SHUNT RATED (LEAD RES. RANGE: .04-.08Ω)*

SCALY

20 Amp	250 124 GBNG	250 224 GBNG	254 224 GBNG	250 324 GBNG	254 324 GBNG	250 424 GBNG	254 424 GBNG
40 Amp	250 124 GBNP	250 224 GBNP	254 224 GBNP	250 324 GBNP	254 324 GBNP	250 424 GBNP	254 424 GBNP
50 Amp	250 124 GBNT	250 224 GBNT	254 224 GBNT	250 324 GBNT	254 324 GBNT	250 424 GBNT	254 424 GBNT
75 Amp	250 124 GBPB	250 224 GBPB	254 224 GBPB	250 324 GBPB	254 324 GBPB	250 424 GBPB	254 424 GBPB
100 Amp	250 124 GBPK	250 224 GBPK	254 224 GBPK	250 324 GBPK	254 324 GBPK	250 424 GBPK	254 424 GBPK
150 Amp	250 124 GBPZ	250 224 GBPZ	254 224 GBPZ	250 324 GBPZ	254 324 GBPZ	250 424 GBPZ	254 424 GBPZ
200 Amp	250 124 GBRL	250 224 GBRL	254 224 GBRL	250 324 GBRL	254 324 GBRL	250 424 GBRL	254 424 GBRL
250 Amp	250 124 GBRS	250 224 GBRS	254 224 GBRS	250 324 GBRS	254 324 GBRS	250 424 GBRS	254 424 GBRS
300 Amp	250 124 GBRX	250 224 GBRX	254 224 GBRX	250 324 GBRX	254 324 GBRX	250 424 GBRX	254 424 GBRX
400 Amp	250 124 GBSC	250 224 GBSC	254 224 GBSC	250 324 GBSC	254 324 GBSC	250 424 GBSC	254 424 GBSC
500 Amp	250 124 GBSF	250 224 GBSF	254 224 GBSF	250 324 GBSF	254 324 GBSF	250 424 GBSF	254 424 GBSF
600 Amp	250 124 GBSJ	250 224 GBSJ	254 224 GBSJ	250 324 GBSJ	254 324 GBSJ	250 424 GBSJ	254 424 GBSJ
800 Amp	250 124 GBSN	250 224 GBSN	254 224 GBSN	250 324 GBSN	254 324 GBSN	250 424 GBSN	254 424 GBSN
1Kiloamp	250 124 GBVA	250 224 GBVA	254 224 GBVA	250 324 GBVA	254 324 GBVA	250 424 GBVA	254 424 GBVA
2 Kiloamp	250 124 GBVE	250 224 GBVE	254 224 GBVE	250 324 GBVE	254 324 GBVE	250 424 GBVE	254 424 GBVE

*Shunts are not included: For 50mV shunts, see page 29



DC Ammeters Cont'd

Size	1½	2½		3½		4½	
Rating & Scale / Type	Taut Band	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel

DC AMMETERS — ZERO-CENTER

1-0-1 Amp 2-0-2 Amp 5-0-5 Amp 10-0-10 Amp 15-0-15 Amp	250 101 LALA 250 101 LELE 250 101 LSLS 250 101 MTMT	250 201 LALA 250 201 LELE 250 201 LSLS 250 201 MTMT 250 201 NDND	254 201 LALA 254 201 LELE 254 201 LSLS 254 201 MTMT 254 201 NDND	250 301 LALA 250 301 LELE 250 301 LSLS 250 301 MTMT 250 301 NDND	254 301 LALA 254 301 LELE 254 301 LSLS 254 301 MTMT 254 301 NDND	250 401 LALA 250 401 LELE 250 401 LSLS 250 401 MTMT 250 401 NDND	254 401 LALA 254 401 LELE 254 401 LSLS 254 401 MTMT 254 401 NDND
20-0-20 Amp 30-0-30 Amp 50-0-50 Amp		250 201 NGNG 250 201 NLNL	254 201 NGNG 254 201 NLNL	250 301 NGNG 250 301 NLNL 250 301 NTNT	254 301 NGNG 254 301 NLNL 254 301 NTNT	250 401 NGNG 250 401 NLNL 250 401 NTNT	254 401 NGNG 254 401 NLNL 254 401 NTNT

DC AMMETERS — ZERO-CENTER, 50 mV, SHUNT RATED (LEAD RES. RANGE: .05-.07Ω)*

20-0-20 Amp 40-0-40 Amp 50-0-50 Amp 75-0-75 Amp 100-0-100 Amp	250 125 ECNG 250 125 ECNP 250 125 ECNT 250 125 ECPB 250 125 ECPK	250 225 ECNG 250 225 ECNP 250 225 ECNT 250 225 ECPB 250 225 ECPK	 254 225 ECNP 254 225 ECNT 254 225 ECPB 254 225 ECPK	250 325 ECNG 250 325 ECNP 250 325 ECNT 250 325 ECPB 250 325 ECPK	 254 325 ECNP 254 325 ECNT 254 325 ECPB 254 325 ECPK	 250 425 ECNP 250 425 ECNT 250 425 ECPB 250 425 ECPK	 254 425 ECNP 254 425 ECNT 254 425 ECPB 254 425 ECPK
---	--	--	---	--	---	---	---

*Shunts are not included: For 50mV shunts, see page 29

AC Voltmeters

Size	1½	2½	3½	4½
Rating & Scale / Type		200 Series	200 Series	200 Series

AC VOLTMETERS — SELF-CONTAINED, IRON VANE TYPE, PIVOT AND JEWEL 60 Hz

3 Volts 5 Volts 10 Volts 15 Volts 30 Volts		250 244 LJLJ 250 244 LSLS 250 244 MTMT 250 244 NDND 250 244 NLNL	250 344 LJLJ 250 344 LSLS 250 344 MTMT 250 344 NDND 250 344 NLNL	250 444 LJLJ 250 444 LSLS 250 444 MTMT 250 444 NDND 250 444 NLNL
50 Volts 100 Volts 150 Volts 300 Volts 500 Volts 600 Volts		250 244 NTNT 250 244 PKPK 250 244 PZPZ 250 244 RXRX	250 344 NTNT 250 344 PKPK 250 344 PZPZ 250 344 RXRX 250 344 SFSF 250 344 SJSJ	250 444 NTNT 250 444 PKPK 250 444 PZPZ 250 444 RXRX 250 444 SFSF 250 444 SJSJ

AC VOLTMETERS — SELF-CONTAINED, IRON VANE TYPE, PIVOT AND JEWEL 400 Hz

150 Volts 300 Volts		250 245 PZPZ 250 245 RXRX	250 345 PZPZ 250 345 RXRX	250 445 PZPZ 250 445 RXRX
------------------------	----------------	------------------------------	------------------------------	------------------------------

AC VOLTMETERS — TRANSFORMER RATED, 0-150 VOLTS, PIVOT AND JEWEL, IRON VANE TYPE, 60 Hz. (See page 29 for Transformers)

600 Volts 750 Volts 3 kV		250 244 PZSJ 250 244 PZSM 250 244 PZVJ	250 344 PZSJ 250 344 PZSM 250 344 PZVJ	250 444 PZSJ 250 444 PZSM 250 444 PZVJ
--------------------------------	-------------------------	--	--	--

AC VOLTMETERS — EXPANDED SCALE, RECTIFIER TYPE

Size	1½	2½		3½		4½	
Rating & Scale / Type	Taut Band	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel
110-130 Volts 105-125 Volts				250 337 PNPB 250 337 PTPT	254 337 PNPB 254 337 PTPT	250 437 PNPB 250 437 PTPT	254 437 PNPB 254 437 PTPT

AC Voltmeters Cont'd

Size	1½	2½		3½		4½	
Rating & Scale \ Type	Taut Band	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel

AC VOLTMETERS — SELF-CONTAINED, RECTIFIER TYPE

10 Volts	250 130 MTMT	250 230 MTMT	254 230 MTMT	250 330 MTMT	254 330 MTMT	250 430 MTMT	254 430 MTMT
15 Volts	250 130 NDND	250 230 NDND	254 230 NDND	250 330 NDND	254 330 NDND	250 430 NDND	254 430 NDND
20 Volts	250 130 NGNG	250 230 NGNG	254 230 NGNG	250 330 NGNG	254 330 NGNG	250 430 NGNG	254 430 NGNG
25 Volts	250 130 NJNJ	250 230 NJNJ	254 230 NJNJ	250 330 NJNJ	254 330 NJNJ	250 430 NJNJ	254 430 NJNJ
30 Volts	250 130 NLNL	250 230 NLNL	254 230 NLNL	250 330 NLNL	254 330 NLNL	250 430 NLNL	254 430 NLNL
50 Volts	250 130 NTNT	250 230 NTNT	254 230 NTNT	250 330 NTNT	254 330 NTNT	250 430 NTNT	254 430 NTNT
80 Volts	250 130 PDPD	250 230 PDPD	254 230 PDPD	250 330 PDPD	254 330 PDPD	250 430 PDPD	254 430 PDPD
100 Volts	250 130 PKPK	250 230 PKPK	254 230 PKPK	250 330 PKPK	254 330 PKPK	250 430 PKPK	254 430 PKPK
150 Volts	250 130 PZPZ	250 230 PZPZ	254 230 PZPZ	250 330 PZPZ	254 330 PZPZ	250 430 PZPZ	254 430 PZPZ
200 Volts				250 330 RLRL	254 330 RLRL	250 430 RLRL	254 430 RLRL
250 Volts				250 330 RSRS	254 330 RSRS	250 430 RSRS	254 430 RSRS
300 Volts				250 330 RXRX	254 330 RXRX	250 430 RXRX	254 430 RXRX

AC Ammeters

AC MICROAMMETERS AND MILLIAMMETERS — RECTIFIER TYPE

500 µA	250 110 EMEM	250 210 EMEM	254 210 EMEM	250 310 EMEM	254 310 EMEM	250 410 EMEM	254 410 EMEM
800 µA	250 110 EWEW	250 210 EWEW	254 210 EWEW	250 310 EWEW	254 310 EWEW	250 410 EWEW	254 410 EWEW
1 mA	250 110 FAFA	250 210 FAFA	254 210 FAFA	250 310 FAFA	254 310 FAFA	250 410 FAFA	254 410 FAFA
1.5 mA	250 110 FDFD	250 210 FDFD	254 210 FDFD	250 310 FDFD	254 310 FDFD	250 410 FDFD	254 410 FDFD
2 mA	250 110 FGFG	250 210 FGFG	254 210 FGFG	250 310 FGFG	254 310 FGFG	250 410 FGFG	254 410 FGFG
3 mA	250 110 FNFN	250 210 FNFN	254 210 FNFN	250 310 FNFN	254 310 FNFN	250 410 FNFN	254 410 FNFN
5 mA	250 110 FXFX	250 210 FXFX	254 210 FXFX	250 310 FXFX	254 310 FXFX	250 410 FXFX	254 410 FXFX
10 mA	250 110 GZGZ	250 210 GZGZ	254 210 GZGZ	250 310 GZGZ	254 310 GZGZ	250 410 GZGZ	254 410 GZGZ
20 mA	250 110 HFHF	250 210 HFHF	254 210 HFHF	250 310 HFHF	254 310 HFHF	250 410 HFHF	254 410 HFHF

Size	1½	2½	3½	4½
Rating & Scale \ Type		200 Series	200 Series	200 Series


AC MILLIAMMETERS — SELF-CONTAINED, 25-400 Hz, IRON VANE, PIVIT AND JEWEL

10 mA		250 240 GZGZ	250 340 GZGZ	250 440 GZGZ
25 mA		250 240 HJHJ	250 340 HJHJ	250 440 HJHJ
50 mA		250 240 HYHY	250 340 HYHY	250 440 HYHY
100 mA		250 240 JRJR	250 340 JRJR	250 440 JRJR
200 mA		250 240 KAKA	250 340 KAKA	250 440 KAKA
500 mA		250 240 KMKM	250 340 KMKM	250 440 KMKM

AC AMMETERS — SELF-CONTAINED, 25-400 Hz, IRON VANE, PIVOT AND JEWEL

1 Amp		250 240 LALA	250 340 LALA	250 440 LALA
3 Amp		250 240 LJLJ	250 340 LJLJ	250 440 LJLJ
5 Amp		250 240 LSLS	250 340 LSLS	250 440 LSLS
8 Amp		250 240 MJMJ	250 340 MJMJ	250 440 MJMJ
10 Amp		250 240 MTMT	250 340 MTMT	250 440 MTMT
15 Amp		250 240 NDND	250 340 NDND	250 440 NDND
20 Amp		250 240 NGNG*	250 340 NGNG*	250 440 NGNG*
30 Amp		250 240 NLNL*	250 340 NLNL*	250 440 NLNL*
50 Amp			250 340 NTNT*	250 440 NTNT*
80 Amp			250 340 PDPD*	250 440 PDPD*

* External Magnetic shield included



AC Ammeters Cont'd

Size	1½	2½	3½	4½
Rating & Scale	Type	200 Series	200 Series	200 Series

AC AMMETERS — TRANSFORMER-RATED, 0-5 AMPERES, 25-500 Hz, PIVOT AND JEWEL, IRON VANE

(See page 29 for Transformers)

SCALY

10 Amp		250 240 LSMT	250 340 LSMT	250 440 LSMT
15 Amp		250 240 LSND	250 340 LSND	250 440 LSND
20 Amp		250 240 LSNG	250 340 LSNG	250 440 LSNG
30 Amp		250 240 LSNL	250 340 LSNL	250 440 LSNL
40 Amp		250 240 LSNP	250 340 LSNP	250 440 LSNP
50 Amp		250 240 LSNT	250 340 LSNT	250 440 LSNT
75 Amp		250 240 LSPB	250 340 LSPB	250 440 LSPB
80 Amp		250 240 LSPD	250 340 LSPD	250 440 LSPD
100 Amp		250 240 LSPK	250 340 LSPK	250 440 LSPK
150 Amp		250 240 LSPZ	250 340 LSPZ	250 440 LSPZ
200 Amp		250 240 LSRL	250 340 LSRL	250 440 LSRL
300 Amp		250 240 LSRX	250 340 LSRX	250 440 LSRX
400 Amp		250 240 LSSC	250 340 LSSC	250 440 LSSC
500 Amp		250 240 LSSF	250 340 LSSF	250 440 LSSF
600 Amp		250 240 LSSJ	250 340 LSSJ	250 440 LSSJ
800 Amp		250 240 LSSN	250 340 LSSN	250 440 LSSN
1 Kiloamp		250 240 LSV A	250 340 LSV A	250 440 LSV A
1.2 Kiloamp		250 240 LSV B	250 340 LSV B	250 440 LSV B
1.5 Kiloamp		250 240 LSV C	250 340 LSV C	250 440 LSV C
2.0 Kiloamp		250 240 LSV E	250 340 LSV E	250 440 LSV E
3.0 Kiloamp		250 240 LSV J	250 340 LSV J	250 440 LSV J

YOKOGAWA ◆ Horizon Line



Type 251 and 255
Horizon Line

Specifications

Accuracy: All DC and AC iron-vane; $\pm 2\%$ of full-scale, AC rectifier type; $\pm 3\%$ of full scale (with 60 Hz sine wave at 25°C). When standard 60 Hz iron vane ammeters are used at the extreme limits of 20 or 400 Hz, additional error (approx. $.75\%$) may be experienced. Expanded-scale voltmeters; $\pm .5\%$ of full scale value.

ANSI Specification: All meters meet ANSI Specifications C-39.1.

Overload: Voltmeters (AC and DC) - 50% momentary, 20% sustained. Ammeters (AC and DC) momentary: 10 times the rated current for 10 consecutive intervals of .5 second with a 1 minute interval between successive applications; sustained: 20% for six hours.

Scale Data: 90 degree rotation.

Scale Length:

Size	Horizon Line
1½"	1.50"
2½"	2.06"
3½"	2.88"
4½"	3.93"

Insulation Level: All meters (except 1½"), 2600 VRMS Hi-pot, 1½"-1500 VRMS Hi-pot.

Burden Data: AC ammeter-5 amps, 0.5 va max. 0.5 power-factor lagging, @60 Hz. AC Voltmeter-unity power factor.

Response Time and Overshoot:

Response time: 3 seconds (max.) for 2½",

3½", 4½" size for microammeters: 2 seconds (max.) for all other DC ratings, and 2.5 seconds (max.) for AC ratings. Maximum of 40% overshoot.

Dimensions: See page 34-35.

How To Order

To Order Horizon Line panel meters use the appropriate catalog numbers provided in the tables. Taut band instruments have a 251 prefix number, Pivot & jewel instruments have a 255 prefix number, except AC Iron Vane prefix which is 251.

Ordering Examples:

- 21½", 300 V DC Voltmeter, zero left, taut band - 251 220 RXRX
- 21½", 300 V DC Voltmeter, zero left, pivot & jewel - 255 220 RXRX
- 21½", 300 VAC (Iron Vane) pivot & jewel - 251 244 RXRX

Severe-duty meters are available to meet UL 1437 requirements. UL/CSA version, with flame retardant window and base, is not offered in 11½". To order, add /UL or /CSA after catalog number, or contact factory. For ratings and scales not listed contact factory.

DC Voltmeters

Size	1½	2½		3½		4½	
Rating & Scale Type	Taut Band	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel

DC VOLTMETERS - ZERO-LEFT

1.0 Volts	251 120 LALA	251 220 LALA	255 220 LALA	251 320 LALA	255 320 LALA	251 420 LALA	255 420 LALA
1.5 Volts	251 120 LCLC	251 220 LCLC	255 220 LCLC	251 320 LCLC	255 320 LCLC	251 420 LCLC	255 420 LCLC
3 Volts	251 120 LJLJ	251 220 LJLJ	255 220 LJLJ	251 320 LJLJ	255 320 LJLJ	251 420 LJLJ	255 420 LJLJ
5 Volts	251 120 LSLS	251 220 LSLS	255 220 LSLS	251 320 LSLS	255 320 LSLS	251 420 LSLS	255 420 LSLS
8 Volts	251 120 MJMJ	251 220 MJMJ	255 220 MJMJ	251 320 MJMJ	255 320 MJMJ	251 420 MJMJ	255 420 MJMJ
10 Volts	251 120 MTMT	251 220 MTMT	255 220 MTMT	251 320 MTMT	255 320 MTMT	251 420 MTMT	255 420 MTMT
15 Volts	251 120 NDND	251 220 NDND	255 220 NDND	251 320 NDND	255 320 NDND	251 420 NDND	255 420 NDND
30 Volts	251 120 NLNL	251 220 NLNL	255 220 NLNL	251 320 NLNL	255 320 NLNL	251 420 NLNL	255 420 NLNL
40 Volts	251 120 NPNP	251 220 NPNP	255 220 NPNP	251 320 NPNP	255 320 NPNP	251 420 NPNP	255 420 NPNP
50 Volts	251 120 NTNT	251 220 NTNT	255 220 NTNT	251 320 NTNT	255 320 NTNT	251 420 NTNT	255 420 NTNT
80 Volts	251 120 PDPD	251 220 PDPD	255 220 PDPD	251 320 PDPD	255 320 PDPD	251 420 PDPD	255 420 PDPD
100 Volts	251 120 PKPK	251 220 PKPK	255 220 PKPK	251 320 PKPK	255 320 PKPK	251 420 PKPK	255 420 PKPK
150 Volts	251 120 PZPZ	251 220 PZPZ	255 220 PZPZ	251 320 PZPZ	255 320 PZPZ	251 420 PZPZ	255 420 PZPZ
200 Volts	251 120 RLRL	251 220 RLRL	255 220 RLRL	251 320 RLRL	255 320 RLRL	251 420 RLRL	255 420 RLRL
250 Volts	251 120 RSRS	251 220 RSRS	255 220 RSRS	251 320 RSRS	255 320 RSRS	251 420 RSRS	255 420 RSRS
300 Volts	251 120 RXRX	251 220 RXRX	255 220 RXRX	251 320 RXRX	255 320 RXRX	251 420 RXRX	255 420 RXRX
500 Volts				251 320 SFSF	255 320 SFSF	251 420 SFSF	255 420 SFSF
600 Volts				251 320 SJSJ	255 320 SJSJ	251 420 SJSJ	255 420 SJSJ

DC VOLTMETERS — ZERO-LEFT, RATED 0-1 mA DC, FOR USE WITH EXTERNAL RESISTORS, RESISTORS NOT INCLUDED (SEE PAGE 29 FOR RESISTORS)

SCALE

500 Volts	251 104 FASF	251 204 FASF	255 204 FASF				
600 Volts	251 104 FASJ	251 204 FASJ	255 204 FASJ				
750 Volts	251 104 FASM	251 204 FASM	255 204 FASM	251 304 FASM	255 304 FASM	251 404 FASM	255 404 FASM

DC VOLTMETERS — ZERO-CENTER

5-0-5 Volts	251 121 LSLS	251 221 LSLS	255 221 LSLS	251 321 LSLS	255 321 LSLS	251 421 LSLS	255 421 LSLS
10-0-10 Volts	251 121 MTMT	251 221 MTMT	255 221 MTMT	251 321 MTMT	255 321 MTMT	251 421 MTMT	255 421 MTMT
30-0-30 Volts	251 121 NLNL	251 221 NLNL	255 221 NLNL	251 321 NLNL	255 321 NLNL	251 421 NLNL	255 421 NLNL
50-0-50 Volts	251 121 NTNT	251 221 NTNT	255 221 NTNT	251 321 NTNT	255 321 NTNT	251 421 NTNT	255 421 NTNT
80-0-80 Volts	251 121 PDPD	251 221 PDPD	255 221 PDPD	251 321 PDPD	255 321 PDPD	251 421 PDPD	255 421 PDPD
150-0-150 Volts	251 121 PZPZ	251 221 PZPZ	255 221 PZPZ	251 321 PZPZ	255 321 PZPZ	251 421 PZPZ	255 421 PZPZ
300-0-300 Volts	251 121 RXRX	251 221 RXRX	255 221 RXRX	251 321 RXRX	255 321 RXRX	251 421 RXRX	255 421 RXRX
500-0-500 Volts				251 321 SFSF	255 321 SFSF	251 421 SFSF	255 421 SFSF
600-0-600 Volts				251 321 SJSJ	255 321 SJSJ	251 421 SJSJ	255 421 SJSJ

DC VOLTMETERS — ZERO-CENTER, RATED 1-0-1 mA, DC, FOR USE WITH EXTERNAL RESISTORS, RESISTORS NOT INCLUDED (SEE PAGE 29 FOR RESISTORS)

SCALE

500-0-500 Volts	251 105 FASF	251 205 FASF	255 205 FASF				
600-0-600 Volts	251 105 FASJ	251 205 FASJ	255 205 FASJ				
750-0-750 Volts	251 105 FASM	251 205 FASM	255 205 FASM	251 305 FASM	255 305 FASM	251 405 FASM	255 405 FASM

DC VOLTMETERS — EXPANDED SCALE; ZENER DIODE TYPE

24-30 Volts				251 338 NNNN	255 338 NNNN	251 438 NNNN	255 438 NNNN
110-130 Volts				251 338 PNP	255 338 PNP	251 438 PNP	255 438 PNP
220-260 Volts				251 338 RTRT	255 338 RTRT	251 438 RTRT	255 438 RTRT

DC Ammeters

Size	1½	2½		3½		4½	
Rating & Scale Type	Taut Band	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel

DC MICROAMMETERS — ZERO-LEFT

20 µA	251 100 CFCF	251 200 CFCF		251 300 CFCF		251 400 CFCF	
50 µA	251 100 CYCY	251 200 CYCY		251 300 CYCY		251 400 CYCY	
100 µA	251 100 DRDR	251 200 DRDR		251 300 DRDR		251 400 DRDR	
200 µA	251 100 EAEA	251 200 EAEA	255 200 EAEA	251 300 EAEA	255 300 EAEA	251 400 EAEA	255 400 EAEA
500 µA	251 100 EMEM	251 200 EMEM	255 200 EMEM	251 300 EMEM	255 300 EMEM	251 400 EMEM	255 400 EMEM



DC Ammeters Cont'd

Size	1½	2½		3½		4½	
Type Rating & Scale	Taut Band	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel

DC MICROAMMETERS — ZERO-CENTER

20-0-20 µA	251 101 CFCF	251 201 CFCF		251 301 CFCF			
50-0-50 µA	251 101 CYCY	251 201 CYCY		251 301 CYCY		251 401 CYCY	
100-0-100 µA	251 101 DRDR	251 201 DRDR	255 201 DRDR	251 301 DRDR	255 301 DRDR	251 401 DRDR	255 401 DRDR
200-0-200 µA	251 101 EAEA	251 201 EAEA	255 201 EAEA	251 301 EAEA	255 301 EAEA	251 401 EAEA	255 401 EAEA
500-0-500 µA	251 101 EMEM	251 201 EMEM	255 201 EMEM	251 301 EMEM	255 301 EMEM	251 401 EMEM	255 401 EMEM

DC MILLIAMMETERS — ZERO-LEFT

1 mA	251 100 FAFA	251 200 FAFA	255 200 FAFA	251 300 FAFA	255 300 FAFA	251 400 FAFA	255 400 FAFA
5 mA	251 100 FAFX	251 200 FAFX	255 200 FAFX	251 300 FAFX	255 300 FAFX	251 400 FAFX	255 400 FAFX
10 mA	251 100 GZGZ	251 200 GZGZ	255 200 GZGZ	251 300 GZGZ	255 300 GZGZ	251 400 GZGZ	255 400 GZGZ
20 mA	251 100 HFHF	251 200 HFHF	255 200 HFHF	251 300 HFHF	255 300 HFHF	251 400 HFHF	255 400 HFHF
25 mA	251 100 HJHJ	251 200 HJHJ	255 200 HJHJ	251 300 HJHJ	255 300 HJHJ	251 400 HJHJ	255 400 HJHJ
30 mA	251 100 HMHM	251 200 HMHM	255 200 HMHM	251 300 HMHM	255 300 HMHM	251 400 HMHM	255 400 HMHM
50 mA	251 100 HYHY	251 200 HYHY	255 200 HYHY	251 300 HYHY	255 300 HYHY	251 400 HYHY	255 400 HYHY
80 mA	251 100 JJJJ	251 200 JJJJ	255 200 JJJJ	251 300 JJJJ	255 300 JJJJ	251 400 JJJJ	255 400 JJJJ
100 mA	251 100 JRJR	251 200 JRJR	255 200 JRJR	251 300 JRJR	255 300 JRJR	251 400 JRJR	255 400 JRJR
150 mA	251 100 JXJX	251 200 JXJX	255 200 JXJX	251 300 JXJX	255 300 JXJX	251 400 JXJX	255 400 JXJX
200 mA	251 100 KAKA	251 200 KAKA	255 200 KAKA	251 300 KAKA	255 300 KAKA	251 400 KAKA	255 400 KAKA
250 mA	251 100 KDKD	251 200 KDKD	255 200 KDKD	251 300 KDKD	255 300 KDKD	251 400 KDKD	255 400 KDKD
300 mA	251 100 KGKG	251 200 KGKG	255 200 KGKG	251 300 KGKG	255 300 KGKG	251 400 KGKG	255 400 KGKG
500 mA	251 100 KMKM	251 200 KMKM	255 200 KMKM	251 300 KMKM	255 300 KMKM	251 400 KMKM	255 400 KMKM
800 mA	251 100 KWKW	251 200 KWKW	255 200 KWKW	251 300 KWKW	255 300 KWKW	251 400 KWKW	255 400 KWKW

DC MILLIAMMETERS — ZERO-CENTER

1-0-1 mA	251 101 FAFA	251 201 FAFA	255 201 FAFA	251 301 FAFA	255 301 FAFA	251 401 FAFA	255 401 FAFA
5-0-5 mA	251 101 FAFX	251 201 FAFX	255 201 FAFX	251 301 FAFX	255 301 FAFX	251 401 FAFX	255 401 FAFX
10-0-10 mA	251 101 GZGZ	251 201 GZGZ	255 201 GZGZ	251 301 GZGZ	255 301 GZGZ	251 401 GZGZ	255 401 GZGZ
20-0-20 mA	251 101 HFHF	251 201 HFHF	255 201 HFHF	251 301 HFHF	255 301 HFHF	251 401 HFHF	255 401 HFHF
25-0-25 mA	251 101 HJHJ	251 201 HJHJ	255 201 HJHJ	251 301 HJHJ	255 301 HJHJ	251 401 HJHJ	255 401 HJHJ
30-0-30 mA	251 101 HMHM	251 201 HMHM	255 201 HMHM	251 301 HMHM	255 301 HMHM	251 401 HMHM	255 401 HMHM
50-0-50 mA	251 101 HYHY	251 201 HYHY	255 201 HYHY	251 301 HYHY	255 301 HYHY	251 401 HYHY	255 401 HYHY
100-0-100 mA	251 101 JRJR	251 201 JRJR	255 201 JRJR	251 301 JRJR	255 301 JRJR	251 401 JRJR	255 401 JRJR
150-0-150 mA	251 101 JXJX	251 201 JXJX	255 201 JXJX	251 301 JXJX	255 301 JXJX	251 401 JXJX	255 401 JXJX
200-0-200 mA	251 101 KAKA	251 201 KAKA	255 201 KAKA	251 301 KAKA	255 301 KAKA	251 401 KAKA	255 401 KAKA
250-0-250 mA	251 101 KDKD	251 201 KDKD	255 201 KDKD	251 301 KDKD	255 301 KDKD	251 401 KDKD	255 401 KDKD
300-0-300 mA	251 101 KGKG	251 201 KGKG	255 201 KGKG	251 301 KGKG	255 301 KGKG	251 401 KGKG	255 401 KGKG
500-0-500 mA	251 101 KMKM	251 201 KMKM	255 201 KMKM	251 301 KMKM	255 301 KMKM	251 401 KMKM	255 401 KMKM

DC AMMETERS — ZERO-LEFT

1 Amp	251 100 LALA	251 200 LALA	255 200 LALA	251 300 LALA	255 300 LALA	251 400 LALA	255 400 LALA
1.5 Amp	251 100 LCLC	251 200 LCLC	255 200 LCLC	251 300 LCLC	255 300 LCLC	251 400 LCLC	255 400 LCLC
2 Amp	251 100 LELE	251 200 LELE	255 200 LELE	251 300 LELE	255 300 LELE	251 400 LELE	255 400 LELE
13 Amp	251 100 LJLJ	251 200 LJLJ	255 200 LJLJ	251 300 LJLJ	255 300 LJLJ	251 400 LJLJ	255 400 LJLJ
5 Amp	251 100 LSLS	251 200 LSLS	255 200 LSLS	251 300 LSLS	255 300 LSLS	251 400 LSLS	255 400 LSLS
10 Amp	251 100 MTMT	251 200 MTMT	255 200 MTMT	251 300 MTMT	255 300 MTMT	251 400 MTMT	255 400 MTMT
15 Amp		251 200 NDND	255 200 NDND	251 300 NDND	255 300 NDND	251 400 NDND	255 400 NDND
20 Amp		251 200 NGNG	255 200 NGNG	251 300 NGNG	255 300 NGNG	251 400 NGNG	255 400 NGNG
30 Amp		251 200 NLNL	255 200 NLNL	251 300 NLNL	255 300 NLNL	251 400 NLNL	255 400 NLNL
50 Amp		251 200 NTNT		251 300 NTNT	255 300 NTNT	251 400 NTNT	255 400 NTNT

DC AMMETERS — ZERO-LEFT, 50 mV, SHUNT RATED (LEAD RES. RANGE: .05-.07Ω)*

20 Amp	251 124 ECNG	251 224 ECNG	255 224 ECNG	251 324 ECNG	255 324 ECNG	251 424 ECNG	255 424 ECNG
30 Amp	251 124 ECNL	251 224 ECNL	255 224 ECNL	251 324 ECNL	255 324 ECNL	251 424 ECNL	255 424 ECNL
50 Amp	251 124 ECNT	251 224 ECNT	255 224 ECNT	251 324 ECNT	255 324 ECNT	251 424 ECNT	255 424 ECNT
75 Amp	251 124 ECPB	251 224 ECPB	255 224 ECPB	251 324 ECPB	255 324 ECPB	251 424 ECPB	255 424 ECPB
100 Amp	251 124 ECPK	251 224 ECPK	255 224 ECPK	251 324 ECPK	255 324 ECPK	251 424 ECPK	255 424 ECPK
150 Amp	251 124 ECPZ	251 224 ECPZ	255 224 ECPZ	251 324 ECPZ	255 324 ECPZ	251 424 ECPZ	255 424 ECPZ
200 Amp	251 124 ECRL	251 224 ECRL	255 224 ECRL	251 324 ECRL	255 324 ECRL	251 424 ECRL	255 424 ECRL
250 Amp	251 124 ECRS	251 224 ECRS	255 224 ECRS	251 324 ECRS	255 324 ECRS	251 424 ECRS	255 424 ECRS
300 Amp	251 124 ECRX	251 224 ECRX	255 224 ECRX	251 324 ECRX	255 324 ECRX	251 424 ECRX	255 424 ECRX
400 Amp	251 124 ECSC	251 224 ECSC	255 224 ECSC	251 324 ECSC	255 324 ECSC	251 424 ECSC	255 424 ECSC

SCALY

DC Ammeters Cont'd

Size	1½	2½		3½		4½	
Rating & Scale Type	Taut Band	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel

DC AMMETERS — ZERO-LEFT, 50mV, SHUNT RATED* - continued

SCALY

500 Amp 600 Amp 800 Amp	251 124 ECSF 251 124 ECSJ 251 124 ECSN	251 224 ECSF 251 224 ECSJ 251 224 ECSN	255 224 ECSF 255 224 ECSJ 255 224 ECSN	251 324 ECSF 251 324 ECSJ 251 324 ECSN	255 324 ECSF 255 324 ECSJ 255 324 ECSN	251 424 ECSF 251 424 ECSJ 251 424 ECSN	255 424 ECSF 255 424 ECSJ 255 424 ECSN
1 Kilomap 1.5 Kiloamp 2 Kiloamp	251 124 ECVA 251 124 ECVC 251 124 ECVE	251 224 ECVA 251 224 ECVC 251 224 ECVE	255 224 ECVA 255 224 ECVC 255 224 ECVE	251 324 ECVA 251 324 ECVC 251 324 ECVE	255 324 ECVA 255 324 ECVC 255 324 ECVE	251 424 ECVA 251 424 ECVC 251 424 ECVE	255 424 ECVA 255 424 ECVC 255 424 ECVE

DC AMMETERS — ZERO-LEFT, 100mV, SHUNT RATED (LEAD RES. RANGE: .04-.08Ω)*

SCALY

20 Amp 40 Amp 50 Amp 75 Amp 100 Amp	251 124 GBNG 251 124 GBNP 251 124 GBNT 251 124 GBPB 251 124 GBPK	251 224 GBNG 251 224 GBNP 251 224 GBNT 251 224 GBPB 251 224 GBPK	255 224 GBNG 255 224 GBNP 255 224 GBNT 255 224 GBPB 255 224 GBPK	251 324 GBNG 251 324 GBNP 251 324 GBNT 251 324 GBPB 251 324 GBPK	255 324 GBNG 255 324 GBNP 255 324 GBNT 255 324 GBPB 255 324 GBPK	251 424 GBNG 251 424 GBNP 251 424 GBNT 251 424 GBPB 251 424 GBPK	255 424 GBNG 255 424 GBNP 255 424 GBNT 255 424 GBPB 255 424 GBPK
150 Amp 200 Amp 250 Amp 300 Amp 400 Amp	251 124 GBPZ 251 124 GBRL 251 124 GBRS 251 124 GBRX 251 124 GBSC	251 224 GBPZ 251 224 GBRL 251 224 GBRS 251 224 GBRX 251 224 GBSC	255 224 GBPZ 255 224 GBRL 255 224 GBRS 255 224 GBRX 255 224 GBSC	251 324 GBPZ 251 324 GBRL 251 324 GBRS 251 324 GBRX 251 324 GBSC	255 324 GBPZ 255 324 GBRL 255 324 GBRS 255 324 GBRX 255 324 GBSC	251 424 GBPZ 251 424 GBRL 251 424 GBRS 251 424 GBRX 251 424 GBSC	255 424 GBPZ 255 424 GBRL 255 424 GBRS 255 424 GBRX 255 424 GBSC
500 Amp 600 Amp 800 Amp	251 124 GBSF 251 124 GBSJ 251 124 GBSN	251 224 GBSF 251 224 GBSJ 251 224 GBSN	255 224 GBSF 255 224 GBSJ 255 224 GBSN	251 324 GBSF 251 324 GBSJ 251 324 GBSN	255 324 GBSF 255 324 GBSJ 255 324 GBSN	251 424 GBSF 251 424 GBSJ 251 424 GBSN	255 424 GBSF 255 424 GBSJ 255 424 GBSN
1 Kiloamp 2 Kiloamp	251 124 GBVA 251 124 GBVE	251 224 GBVA 251 224 GBVE	255 224 GBVA 255 224 GBVE	251 324 GBVA 251 324 GBVE	255 324 GBVA 255 324 GBVE	251 424 GBVA 251 424 GBVE	255 424 GBVA 255 424 GBVE

DC AMMETERS — ZERO-CENTER

1-0-1 Amp 2-0-2 Amp 5-0-5Amp 10-0-10 Amp 15-0-15 Amp	251 101 LALA 251 101 LELE 251 101 LSLS 251 101 MTMT	251 201 LALA 251 201 LELE 251 201 LSLS 251 201 MTMT 251 201 NDND	255 201 LALA 255 201 LELE 255 201 LSLS 255 201 MTMT 255 201 NDND	251 301 LALA 251 301 LELE 251 301 LSLS 251 301 MTMT 251 301 NDND	255 301 LALA 255 301 LELE 255 301 LSLS 255 301 MTMT 255 301 NDND	251 401 LALA 251 401 LELE 251 401 LSLS 251 401 MTMT 251 401 NDND	255 401 LALA 255 401 LELE 255 401 LSLS 255 401 MTMT 255 401 NDND
20-0-20 Amp 30-0-30 Amp 50-0-50 Amp		251 201 NGNG 251 201 NLNL	255 201 NGNG 255 201 NLNL	251 301 NGNG 251 301 NLNL 251 301 NTNT	255 301 NGNG 255 301 NLNL 255 301 NTNT	251 401 NGNG 251 401 NLNL 251 401 NTNT	255 401 NGNG 255 401 NLNL 255 401 NTNT

DC AMMETERS — ZERO-CENTER, 50mV, SHUNT RATED (LEAD RES. RANGE .05-.07Ω)*

SCALY

20-0-20 Amp 40-0-40 Amp 50-0-50 Amp 75-0-75 Amp 100-0-100 Amp	251 125 ECNG 251 125 ECNP 251 125 ECNT 251 125 ECPB 251 125 ECPK	251 225 ECNG 251 225 ECNP 251 225 ECNT 251 225 ECPB 251 225 ECPK	255 225 ECNG 255 225 ECNP 255 225 ECNT 255 225 ECPB 255 225 ECPK	251 325 ECNG 251 325 ECNP 251 325 ECNT 251 325 ECPB 251 325 ECPK	255 325 ECNG 255 325 ECNP 255 325 ECNT 255 325 ECPB 255 325 ECPK	 251 425 ECNP 251 425 ECNT 251 425 ECPB 251 425 ECPK	 225 425 ECNP 225 425 ECNT 225 425 ECPB 225 425 ECPK
---	--	--	--	--	--	---	---

*Shunts are not included: For 50mV shunts, see page 29

AC Voltmeters

Size	1½	2½		3½		4½	
Type Rating & Scale	Taut Band	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel

AC VOLTMETERS — SELF-CONTAINED, IRON VANE TYPE, 60 Hz

3 Volts 5 Volts 10 Volts 15 Volts 30 Volts			251 244 LJLJ 251 244 LSLS 251 244 MTMT 251 244 NDND 251 244 NLNL		251 344 LJLJ 251 344 LSLS 251 344 MTMT 251 344 NDND 251 344 NLNL		251 444 LJLJ 251 444 LSLS 251 444 MTMT 251 444 NDND 251 444 NLNL
50 Volts 150 Volts 300 Volts 500 Volts 600 Volts			251 244 NTNT 251 244 PZPZ 251 244 RXRX		251 344 NTNT 251 344 PZPZ 251 344 RXRX 251 344 SFSF 251 344 SJSJ		251 444 NTNT 251 444 PZPZ 251 444 RXRX 251 444 SFSF 251 444 SJSJ



AC Voltmeters Cont'd

Size	1½	2½		3½		4½	
Type Rating & Scale	Taut Band	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel

AC VOLTMETERS — SELF-CONTAINED, IRON VANE TYPE, 400 Hz

150 Volts 300 Volts			251 245 PZPZ 251 245 RXRX		251 345 PZPZ 251 345 RXRX		251 445 PZPZ 251 445 RXRX
------------------------	----------------	----------------	------------------------------	----------------	------------------------------	----------------	------------------------------

AC VOLTMETERS — TRANSFORMER RATED, 0-150 VOLTS, IRON VANE TYPE, 60 Hz. (See Page 29 For Transformers)

SO
NLY

600 Volts 750 Volts 3 kV			251 244 PZSJ 251 244 PZSM 251 244 PZVJ		251 344 PZSJ 251 344 PZSM 251 344 PZVJ		251 444 PZSJ 251 444 PZSM 251 444 PZVJ
--------------------------------	-------------------------	-------------------------	--	-------------------------	--	-------------------------	--

AC VOLTMETERS — EXPANDED SCALE, RECTIFIER TYPE

110-130 Volts 105-125 Volts				251 337 PNPJ 251 337 PTPT	255 337 PNPJ 255 337 PTPT	251 437 PNPJ 251 437 PTPT	255 437 PNPJ 255 437 PTPT
--------------------------------	----------------	----------------	----------------	------------------------------	------------------------------	------------------------------	------------------------------

AC VOLTMETERS — SELF-CONTAINED, RECTIFIER TYPE

10 Volts 15 Volts 20 Volts 25 Volts 30 Volts	251 130 MTMT 251 130 NDND 251 130 NGNG 251 130 NJNJ 251 130 NLNL	251 230 MTMT 251 230 NDND 251 230 NGNG 251 230 NJNJ 251 230 NLNL	255 230 MTMT 255 230 NDND 255 230 NGNG 255 230 NJNJ 255 230 NLNL	251 330 MTMT 251 330 NDND 251 330 NGNG 251 330 NJNJ 251 330 NLNL	255 330 MTMT 255 330 NDND 255 330 NGNG 255 330 NJNJ 255 330 NLNL	251 430 MTMT 251 430 NDND 251 430 NGNG 251 430 NJNJ 251 430 NLNL	255 430 MTMT 255 430 NDND 255 430 NGNG 255 430 NJNJ 255 430 NLNL
50 Volts 80 Volts 100 Volts 150 Volts 200 Volts	251 130 NTNT 251 130 PDPD 251 130 PKPK 251 130 PZPZ	251 230 NTNT 251 230 PDPD 251 230 PKPK 251 230 PZPZ	255 230 NTNT 255 230 PDPD 255 230 PKPK 255 230 PZPZ	251 330 NTNT 251 330 PDPD 251 330 PKPK 251 330 PZPZ 251 330 RLRL	255 330 NTNT 255 330 PDPD 255 330 PKPK 255 330 PZPZ 255 330 RLRL	251 430 NTNT 251 430 PDPD 251 430 PKPK 251 430 PZPZ 251 430 RLRL	255 430 NTNT 255 430 PDPD 255 430 PKPK 255 430 PZPZ 255 430 RLRL
250 Volts 300 Volts				251 330 RSRS 251 330 RXRX	255 330 RSRS 255 330 RXRX	251 430 RSRS 251 430 RXRX	255 430 RSRS 255 430 RXRX

AC Ammeters

Size	1½	2½		3½		4½	
Type Rating & Scale	Taut Band	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel	Taut Band	Pivot and Jewel

AC MICROAMMETERS AND MILLIAMMETERS — RECTIFIER TYPE

500 µA 800 µA 1 mA 1.5 mA 2 mA	251 110 EMEM 251 110 EWEW 251 110 FAFA 251 110 FDFD 251 110 FGFG	251 210 EMEM 251 210 EWEW 251 210 FAFA 251 210 FDFD 251 210 FGFG	255 210 EMEM 255 210 EWEW 255 210 FAFA 255 210 FDFD 255 210 FGFG	251 310 EMEM 251 310 EWEW 251 310 FAFA 251 310 FDFD 251 310 FGFG	255 310 EMEM 255 310 EWEW 255 310 FAFA 255 310 FDFD 255 310 FGFG	251 410 EMEM 251 410 EWEW 251 410 FAFA 251 410 FDFD 251 410 FGFG	255 410 EMEM 255 410 EWEW 255 410 FAFA 255 410 FDFD 255 410 FGFG
3 mA 5 mA 10 mA 20 mA	251 110 FNFN 251 110 FXFX 251 110 GZGZ 251 110 HFHF	251 210 FNFN 251 210 FXFX 251 210 GZGZ 251 210 HFHF	255 210 FNFN 255 210 FXFX 255 210 GZGZ 255 210 HFHF	251 310 FNFN 251 310 FXFX 251 310 GZGZ 251 310 HFHF	255 310 FNFN 255 310 FXFX 255 310 GZGZ 255 310 HFHF	251 410 FNFN 251 410 FXFX 251 410 GZGZ 251 410 HFHF	255 410 FNFN 255 410 FXFX 255 410 GZGZ 255 410 HFHF

AC Ammeters Cont'd

AC MILLIAMMETERS — SELF-CONTAINED, 25-400 Hz, IRON VANE

10 mA			251 240 GZGZ		251 340 GZGZ		251 440 GZGZ
25 mA			251 240 HJHJ		251 340 HJHJ		251 440 HJHJ
50 mA			251 240 HYHY		251 340 HYHY		251 440 HYHY
100 mA			251 240 JRJR		251 340 JRJR		251 440 JRJR
200 mA			251 240 KAKA		251 340 KAKA		251 440 KAKA
500 mA			251 240 KMKM		251 340 KMKM		251 440 KMKM

AC AMMETERS — SELF-CONTAINED, 25-400 Hz, IRON VANE

1 Amp			251 240 LALA		251 340 LALA		251 440 LALA
3 Amp			251 240 LJLJ		251 340 LJLJ		251 440 LJLJ
5 Amp			251 240 LSLS		251 340 LSLS		251 440 LSLS
8 Amp			251 240 MJMJ		251 340 MJMJ		251 440 MJMJ
10 Amp			251 240 MTMT		251 340 MTMT		251 440 MTMT
15 Amp			251 240 NDND		251 340 NDND		251 440 NDND
20 Amp			251 240 NGNG*		251 340 NGNG*		251 440 NGNG*
30 Amp			251 240 NLNL*		251 340 NLNL*		251 440 NLNL*
50 Amp					251 340 NTNT*		251 440 NTNT*
80 Amp					251 340 PDPD*		251 440 PDPD*

*External magnetic shield included

AC AMMETERS — TRANSFORMER-RATED, 0-5 AMPERES, 25-400 Hz, IRON VANE (See Page 29 For Transformers)

SCALE

10 Amp			251 240 LSMT		251 340 LSMT		251 440 LSMT
15 Amp			251 240 LSND		251 340 LSND		251 440 LSND
20 Amp			251 240 LSNG		251 340 LSNG		251 440 LSNG
30 Amp			251 240 LSNL		251 340 LSNL		251 440 LSNL
40 Amp			251 240 LSNP		251 340 LSNP		251 440 LSNP
50 Amp			251 240 LSNT		251 340 LSNT		251 440 LSNT
75 Amp			251 240 LSPB		251 340 LSPB		251 440 LSPB
80 Amp			251 240 LSPD		251 340 LSPD		251 440 LSPD
100 Amp			251 240 LSPK		251 340 LSPK		251 440 LSPK
150 Amp			251 240 LSPZ		251 340 LSPZ		251 440 LSPZ
200 Amp			251 240 LSRL		251 340 LSRL		251 440 LSRL
300 Amp			251 240 LSRX		251 340 LSRX		251 440 LSRX
400 Amp			251 240 LSSC		251 340 LSSC		251 440 LSSC
500 Amp			251 240 LSSF		251 340 LSSF		251 440 LSSF
600 Amp			251 240 LSSJ		251 340 LSSJ		251 440 LSSJ
800 Amp			251 240 LSSN		251 340 LSSN		251 440 LSSN
1 Kiloamp			251 240 LSVA		251 340 LSVA		251 440 LSVA
1.2 Kiloamp			251 240 LSVB		251 340 LSVB		251 440 LSVB
1.5 Kiloamp			251 240 L SVC		251 340 L SVC		251 440 L SVC
2.0 Kiloamp			251 240 L SVE		251 340 L SVE		251 440 L SVE
3.0 Kiloamp			251 240 L SVJ		251 340 L SVJ		251 440 L SVJ

AC Motor Load Indicators - Available in Horizon Line or New Big Look

	Size		2½	3½	4½
Rating Amps	Scale Marking	Terminal Resistance Ohms (±15%)	Cat. No.	Cat. No.	Cat. No.

AC LOAD INDICATORS, PIVOT AND JEWEL TYPE 250 — 5-AMP CURRENT TRANSFORMER RATED, 60 Hz — IRON VANE TYPE

5	0-150% Motor Load Current Red Band — 100-150	0.007	250 240 LSPZ7AAA	250 340 LSPZ7AAA	250 440 LSPZ7AAA
5	0-150% Motor Load Current Green — 0-100 Yellow — 100-125, Red — 125-150	0.007	250 240 LSPZ7AAB	250 340 LSPZ7AAB	250 440 LSPZ7AAB

AC LOAD INDICATORS, PIVOT AND JEWEL TYPE 251 — 5-AMP CURRENT TRANSFORMER RATED, 60 Hz — IRON VANE TYPE

5	0-150% Motor Load Current Red Band — 100-150	0.007	251 240 LSPZ7AAJ	251 340 LSPZ7AAJ	251 440 LSPZ7AAJ
5	0-150% Motor Load Current Green — 0-100 Yellow — 100-125, Red — 125-150	0.007	251 240 LSPZ7AAK	251 340 LSPZ7AAK	251 440 LSPZ7AAK



AC Frequency Meters - Available in Horizon Line or New Big Look


Size			1½	2½	3½	4½
Voltage	Center Frequency Hertz	Scale Hertz	Cat. No.	Cat. No.	Cat. No.	Cat. No.

AC FREQUENCY — PIVOT AND JEWEL, SELF-CONTAINED, ACCURACY ±3 PERCENT OF SPAN; I.E., 0.3 Hz FOR 45-55 AND 55-65, AND 1.2 Hz FOR 380-420 RANGE

120	50	45-55		250 AGAG	350 AGAG	450 AGAG
120	55	45-65		250 AJAJ	350 AJAJ	450 AJAJ
120	60	55-65		250 ANAN	350 ANAN	450 ANAN
120	400	380-420		250 BKBJ	350 BKBJ	450 BKBJ
208	50	45-55		Choose prefix 254 or 255	Choose prefix 254 or 255	Choose prefix 254 or 255
208	55	45-65		250 GGGG	350 GGGG	450 GGGG
208	60	55-65		250 GJGJ	350 GJGJ	450 GJGJ
208	400	380-420		250 GNGN	350 GNGN	450 GNGN
				250 HKHK	350 HKHK	450 HKHK
240	50	45-55		250 DGDG	350 DGDG	450 DGDG
240	55	45-65		250 DJDJ	350 DJDJ	450 DJDJ
240	60	55-65		250 DNDN	350 DNDN	450 DNDN
240	400	380-420		250 EKEK	350 EKEK	450 EKEK

NOTE: For non-listed voltages, up to 480 VAC, frequency ranges or special calibration (accuracy ±2% of span) contact factory. For taut-band suspension replace prefix 254 with 250 and prefix 255 with 251.

YOKOGAWA ♦ Stylist Series



Type 260 and 264
Stylist Surface Mount

Specifications

Accuracy: All DC and AC iron vane, ±2% of fullscale, AC rectifier type; ±3% of fullscale (60 Hz sinewave). Expanded scale voltmeters ±5% of fullscale. Special order DC with mirror back scale (DC only) 3½ - 4½" Available @ ±1%.

ANSI Specification: All meters meet ANSI Specifications C-39.1 (See page 14 for exceptions.)

Overload: Voltmeters (AC + DC) - 50% momentary, 20% sustained. Ammeters (AC +DC) momentary: 10 times the rated current for 10 consecutive intervals of .5 seconds with 1 minute interval between successive applications; sustained: 20% for six hours.

Scale Data:

ARC	90%	95%
METER SIZE	AC IRON VANE	TAUT BAND/ PIVOT & JEWEL
1½"	—	1.66"
2½"	2.15"	2.29"
3½"	2.70"	2.85"
4½"	3.80"	4.01"

Insulation Level: 2600V/1 min.
(2½"-4½")
1500V/1 min. (1½")

Response Time:

3 seconds (Max.) - Microammeters
2 seconds (Max.) - All other DC ratings
2.5 seconds (Max.) - All AC ratings
Maximum 40% overshoot

Dimensions: See page 36.

Burden Data: AC Ammeter 5 amps @ 60 Hz, 0.5VA, Max. .5 Power factor lagging, AC voltmeter - unity power factor.

Notes:

Severe-duty meters are available to meet CSA or UL 1437 requirements in 2½"-4½" sizes. To order, add /UL or /CSA after catalog number, or contact factory.

DC Voltmeters

Rating & Scale \ Size	1½	2½	3½	4½
-----------------------	----	----	----	----

DC MILLIVOLTMETERS — ZERO-LEFT

0-50 0-100	260124ECEC 260124GBGB	26□ 224ECEC 26□ 224GBGB	26□ 324ECEC 26□ 324GBGB	26□ 424ECEC 26□ 424GBGB
---------------	--------------------------	----------------------------	----------------------------	----------------------------

DC MILLIVOLTMETERS — ZERO-CENTER

50-0-50 100-0-100	260125ECEC 260125GBGB	26□ 225ECEC 26□ 225GBGB	26□ 325ECEC 26□ 325GBGB	26□ 425ECEC 26□ 425GBGB
----------------------	--------------------------	----------------------------	----------------------------	----------------------------

DC VOLTMETERS — ZERO-LEFT

0-1 0-1.5 0-2 0-3 0-5	260120LALA 260120LCLC 260120LELE 260120LJLJ 260120LSLS	26□ 220LALA 26□ 220LCLC 26□ 220LELE 26□ 220LJLJ 26□ 220LSLS	26□ 320LALA 26□ 320LCLC 26□ 320LELE 26□ 320LJLJ 26□ 320LSLS	26□ 420LALA 26□ 420LCLC 26□ 420LELE 26□ 420LJLJ 26□ 420LSLS
0-10 0-15 0-20 0-25 0-30	260120MTMT 260120NDND 260120NGNG 260120NJNJ 260120NLNL	26□ 220MTMT 26□ 220NDND 26□ 220NGNG 26□ 220NJNJ 26□ 220NLNL	26□ 320MTMT 26□ 320NDND 26□ 320NGNG 26□ 320NJNJ 26□ 320NLNL	26□ 420MTMT 26□ 420NDND 26□ 420NGNG 26□ 420NJNJ 26□ 420NLNL
0-40 0-50 0-75 0-80 0-100	260120NPNP 260120NTNT 260120PBPB 260120PDPD 260120PKPK	26□ 220NPNP 26□ 220NTNT 26□ 220PBPB 26□ 220PDPD 26□ 220PKPK	26□ 320NPNP 26□ 320NTNT 26□ 320PBPB 26□ 320PDPD 26□ 320PKPK	26□ 420NPNP 26□ 420NTNT 26□ 420PBPB 26□ 420PDPD 26□ 420PKPK
0-150 0-200 0-250 0-300 *	260120PZPZ 260120RLRL 260120RSRS 260120RXRX 260120SFSF	26□ 220PZPZ 26□ 220RLRL 26□ 220RSRS 26□ 220RXRX 26□ 220SFSF	26□ 320PZPZ 26□ 320RLRL 26□ 320RSRS 26□ 320RXRX 26□ 320SFSF	26□ 420PZPZ 26□ 420RLRL 26□ 420RSRS 26□ 420RXRX 26□ 420SFSF
* 0-600 * 0-750 * 0-1000	260120SJSJ 260120SMSM 260120SSSS	26□ 220SJSJ 26□ 220SMSM 26□ 220SSSS	26□ 320SJSJ 26□ 320SMSM 26□ 320SSSS	26□ 420SJSJ 26□ 420SMSM 26□ 420SSSS

DC VOLTMETERS — ZERO-CENTER

5-0-5 10-0-10 15-0-15 25-0-25 50-0-50	260121LSLS 260121MTMT 260121NDND 260121NJNJ 260121NTNT	26□ 221LSLS 26□ 221MTMT 26□ 221NDND 26□ 221NJNJ 26□ 221NTNT	26□ 321LSLS 26□ 321MTMT 26□ 321NDND 26□ 321NJNJ 26□ 321NTNT	26□ 421LSLS 26□ 421MTMT 26□ 421NDND 26□ 421NJNJ 26□ 421NTNT
100-0-100 150-0-150 300-0-300 *	260121PKPK 260121PZPZ 260121RXRX 260121SFSF	26□ 221PKPK 26□ 221PZPZ 26□ 221RXRX 26□ 221SFSF	26□ 321PKPK 26□ 321PZPZ 26□ 321RXRX 26□ 321SFSF	26□ 421PKPK 26□ 421PZPZ 26□ 421RXRX 26□ 421SFSF
* 600-0-600	260121SJSJ	26□ 221SJSJ	26□ 321SJSJ	26□ 421SJSJ

DC VOLTMETERS — EXPANDED SCALE

5 ± 10% 12 ± 10% 15 ± 10% 28 ± 10% 48 ± 10%		26□ 238LYLY 26□ 238MYMY 26□ 238NFNF 26□ 238NHNH 26□ 238NSNS	26□ 338LYLY 26□ 338MYMY 26□ 338NFNF 26□ 338NHNH 26□ 338NSNS	26□ 438LYLY 26□ 438MYMY 26□ 438NFNF 26□ 438NHNH 26□ 438NSNS
120 ± 10% 150 ± 10% 300 ± 10%		26□ 238PPPP 26□ 238PYPY 26□ 238RWRW	26□ 338PPPP 26□ 338PYPY 26□ 338RWRW	26□ 438PPPP 26□ 438PYPY 26□ 438RWRW

DC VOLTMETERS — PERCENT DEVIATION ±.05% FULL SCALE ACCURACY

12 ± 10% 28 ± 10% 120 ± 10%		26□ 221MYMY 26□ 221NHNH 26□ 221PPPP	26□ 321MYMY 26□ 321NHNH 26□ 321PPPP	26□ 421MYMY 26□ 421NHNH 26□ 421PPPP
-----------------------------------	--	---	---	---

NOTE ON ORDERING: The ranges and catalog numbers in this catalog refer to both surface and window mount panel meters. To specify your choice, replace the □ in the catalog number with either of the following: 0 for Surface Mount (Taut Band), 1 for Window Mount (Taut Band), 4 for Surface Mount (Pivot & Jewel) or 5 for Window Mount (Pivot & Jewel). (1½" is only available in Surface Mount (Taut Band).)

*Not ANSI.

DC Ammeters

Rating & Scale \ Size	1½	2½	3½	4½
-----------------------	----	----	----	----

DC MICROAMMETERS — ZERO-LEFT

0-10 0-20 0-50 0-100 0-200 0-500	260100BZBZ 260100CFCF 260100CYCY 260100DRDR 260100EAEA 260100EMEM	26□200BZBZ* 26□200CFCF* 26□200CYCY 26□200DRDR 26□200EAEA 26□200EMEM	26□300BZBZ* 26□300CFCF* 26□300CYCY 26□300DRDR 26□300EAEA 26□300EMEM	26□400BZBZ* 26□400CFCF* 26□400CYCY 26□400DRDR 26□400EAEA 26□400EMEM
---	--	--	--	--

DC MICROAMMETERS — ZERO-CENTER

10-0-105 25-0-25 50-0-50 100-0-100 500-0-500	260101BZBZ 260101CJCJ 260101CYCY 260101DRDR 260101EMEM	26□201BZBZ* 26□201CJCJ 26□201CYCY 26□201DRDR 26□201EMEM	26□301BZBZ* 26□301CJCJ 26□301CYCY 26□301DRDR 26□301EMEM	26□401BZBZ* 26□401CJCJ 26□401CYCY 26□401DRDR 26□401EMEM
--	--	---	---	---

DC MILLIAMMETERS — ZERO-LEFT

*Taut Band Only

0-1 0-2 0-3 0-5 0-10	260100FAFA 260100FGFG 260100FNFN 260100FXFX 260100GZGZ	26□200FAFA 26□200FGFG 26□200FNFN 26□200FXFX 26□200GZGZ	26□300FAFA 26□300FGFG 26□300FNFN 26□300FXFX 26□300GZGZ	26□400FAFA 26□400FGFG 26□400FNFN 26□400FXFX 26□400GZGZ
0-15 0-20 0-25 0-30 0-50	260100HCHC 260100HFHF 260100HJHJ 260100HMHM 260100HYHY	26□200HCHC 26□200HFHF 26□200HJHJ 26□200HMHM 26□200HYHY	26□300HCHC 26□300HFHF 26□300HJHJ 26□300HMHM 26□300HYHY	26□400HCHC 26□400HFHF 26□400HJHJ 26□400HMHM 26□400HYHY
0-100 0-150 0-200 0-300 0-500 0-750	260100JRJR 260100JXJX 260100KAKA 260100KGKG 260100KMKM 260100KUKU	26□200JRJR 26□200JXJX 26□200KAKA 26□200KGKG 26□200KMKM 26□200KUKU	26□300JRJR 26□300JXJX 26□300KAKA 26□300KGKG 26□300KMKM 26□300KUKU	26□400JRJR 26□400JXJX 26□400KAKA 26□400KGKG 26□400KMKM 26□400KUKU

DC MILLIAMMETERS — ZERO-CENTER

1-0-1 5-0-5 10-0-10 25-0-25 50-0-50	260101FAFA 260101FXFX 260101GZGZ 260101HJHJ 260101HYHY	26□201FAFA 26□201FXFX 26□201GZGZ 26□201HJHJ 26□201HYHY	26□301FAFA 26□301FXFX 26□301GZGZ 26□301HJHJ 26□301HYHY	26□401FAFA 26□401FXFX 26□401GZGZ 26□401HJHJ 26□401HYHY
100-0-100 200-0-200 500-0-500	260101JRJR 260101KAKA 260101KMKM	26□201JRJR 26□201KAKA 26□201KMKM	26□301JRJR 26□301KAKA 26□301KMKM	26□401JRJR 26□401KAKA 26□401KMKM

DC MILLIAMMETERS — SUPPRESSED ZERO (Indicating receiving gauge applications ±3% F.S.)

0.25-1.25 1-5 4-20 10-50	260100FEFE 260100FYFY 260100HEHE 260100HXHX	26□200FEFE 26□200FYFY 26□200HEHE 26□200HXHX	26□300FEFE 26□300FYFY 26□300HEHE 26□300HXHX	26□400FEFE 26□400FYFY 26□400HEHE 26□400HXHX
-----------------------------------	--	--	--	--

These meters are supplied with 0-100 dial labeled PERCENT.

DC AMMETERS — ZERO-LEFT, SELF-CONTAINED

0-1 0-1.5 0-2 0-3 0-5	260100LALA 260100LCLC 260100LELE 260100LJLJ 260100LSLS	26□200LALA 26□200LCLC 26□200LELE 26□200LJLJ 26□200LSLS	26□300LALA 26□300LCLC 26□300LELE 26□300LJLJ 26□300LSLS	26□400LALA 26□400LCLC 26□400LELE 26□400LJLJ 26□400LSLS
0-10 0-15 0-20	260100MTMT — —	26□200MTMT 26□200NDND 26□200NGNG	26□300MTMT 26□300NDND 26□300NGNG	26□400MTMT 26□400NDND 26□400NGNG

NOTE ON ORDERING: The ranges and catalog numbers in this catalog refer to both surface and window mount panel meters. To specify your choice, replace the □ in the catalog number with either of the following: 0 for Surface Mount (Taut Band), 1 for Window Mount (Taut Band), 4 for Surface Mount (Pivot & Jewel) or 5 for Window Mount (Pivot & Jewel). (1½" is only available in Surface Mount (Taut Band).

DC Ammeters Cont'd

Rating & Scale	Size	1½	2½	3½	4½
-------------------	------	----	----	----	----

DC AMMETERS — ZERO-LEFT, SELF-CONTAINED (cont'd)

0-25 0-30 0-50	— — —	26 □ 200NJNJ 26 □ 200NLNL 26 □ 200NTNT	26 □ 300NJNJ 26 □ 300NLNL 26 □ 300NTNT	26 □ 400NJNJ 26 □ 400NLNL 26 □ 400NTNT
----------------------	-------------	--	--	--

DC AMMETERS — ZERO-LEFT, 50mV SHUNT RATED (LEAD RES. RANGE: .05-.07Ω)*

S C A L E	0-15 0-20 0-25 0-30 0-50	260124ECND 260124ECNG 260124ECNJ 260124ECNL 260124ECNT	26 □ 224ECND 26 □ 224ECNG 26 □ 224ECNJ 26 □ 224ECNL 26 □ 224ECNT	26 □ 324ECND 26 □ 324ECNG 26 □ 324ECNJ 26 □ 324ECNL 26 □ 324ECNT	26 □ 424ECND 26 □ 424ECNG 26 □ 424ECNJ 26 □ 424ECNL 26 □ 424ECNT
	0-75 0-100 0-150 0-200 0-300	260124ECPB 260124ECPK 260124ECPZ 260124ECRL 260124ECRX	26 □ 224ECPB 26 □ 224ECPK 26 □ 224ECPZ 26 □ 224ECRL 26 □ 224ECRX	26 □ 324ECPB 26 □ 324ECPK 26 □ 324ECPZ 26 □ 324ECRL 26 □ 324ECRX	26 □ 424ECPB 26 □ 424ECPK 26 □ 424ECPZ 26 □ 424ECRL 26 □ 424ECRX
	0-500 0-750 0-1000 0-1200 0-1500 0-2000	260124ECSF 260124ECSM 260124ECSS 260124ECSV 260124ECTC 260124ECTM	26 □ 224ECSF 26 □ 224ECSM 26 □ 224ECSS 26 □ 224ECSV 26 □ 224ECTC 26 □ 224ECTM	26 □ 324ECSF 26 □ 324ECSM 26 □ 324ECSS 26 □ 324ECSV 26 □ 324ECTC 26 □ 324ECTM	26 □ 424ECSF 26 □ 424ECSM 26 □ 424ECSS 26 □ 424ECSV 26 □ 424ECTC 26 □ 424ECTM

DC AMMETERS — ZERO LEFT, 100mV SHUNT RATED (LEAD RES. RANGE: 0.4-0.8Ω)*

S C A L E	0-75 0-100 0-150 0-200 0-300	260124GBPB 260124GBPK 260124GBPZ 260124GBRL 260124GBRX	26 □ 224GBPB 26 □ 224GBPK 26 □ 224GBPZ 26 □ 224GBRL 26 □ 224GBRX	26 □ 324GBPB 26 □ 324GBPK 26 □ 324GBPZ 26 □ 324GBRL 26 □ 324GBRX	26 □ 424GBPB 26 □ 424GBPK 26 □ 424GBPZ 26 □ 424GBRL 26 □ 424GBRX
	0-500 0-750 0-1000 0-1200 0-1500 0-2000	260124GBSF 260124GBSM 260124GBSS 260124GBSV 260124GBTC 260124GBTM	26 □ 224GBSF 26 □ 224GBSM 26 □ 224GBSS 26 □ 224GBSV 26 □ 224GBTC 26 □ 224GBTM	26 □ 324GBSF 26 □ 324GBSM 26 □ 324GBSS 26 □ 324GBSV 26 □ 324GBTC 26 □ 324GBTM	26 □ 424GBSF 26 □ 424GBSM 26 □ 424GBSS 26 □ 424GBSV 26 □ 424GBTC 26 □ 424GBTM

DC AMMETERS — ZERO-CENTER, SELF-CONTAINED

1-0-1 3-0-3 5-0-5 10-0-10 15-0-15	260101LALA 260101LJLJ 260101LSLS 260101MTMT —	26 □ 201LALA 26 □ 201LJLJ 26 □ 201LSLS 26 □ 201MTMT 26 □ 201NDND	26 □ 301LALA 26 □ 301LJLJ 26 □ 301LSLS 26 □ 301MTMT 26 □ 301NDND	26 □ 401LALA 26 □ 401LJLJ 26 □ 401LSLS 26 □ 401MTMT 26 □ 401NDND
25-0-25 50-0-50	— —	26 □ 201NJNJ 26 □ 201NTNT	26 □ 301NJNJ 26 □ 301NTNT	26 □ 401NJNJ 26 □ 401NTNT

DC AMMETERS — ZERO-CENTER, 50mV, SHUNT RATED (LEAD RES. RANGE: .05-.07Ω)*

S C A L E	15-0-15 25-0-25 50-0-50 75-0-75 100-0-100	260125ECND 260125ECNJ 260125ECNT 260125ECPB 260125ECPK	26 □ 225ECND 26 □ 225ECNJ 26 □ 225ECNT 26 □ 225ECPB 26 □ 225ECPK	26 □ 325ECND 26 □ 325ECNJ 26 □ 325ECNT 26 □ 325ECPB 26 □ 325ECPK	26 □ 425ECND 26 □ 425ECNJ 26 □ 425ECNT 26 □ 425ECPB 26 □ 425ECPK
	200-0-200 300-0-300 400-0-400 500-0-500	260125ECRL 260125ECRX 260125ECSC 260125ECSF	26 □ 225ECRL 26 □ 225ECRX 26 □ 225ECSC 26 □ 225ECSF	26 □ 325ECRL 26 □ 325ECRX 26 □ 325ECSC 26 □ 325ECSF	26 □ 425ECRL 26 □ 425ECRX 26 □ 425ECSC 26 □ 425ECSF

*Shunts are not included. See Page 29 For 50mV Shunts.

NOTE ON ORDERING: The ranges and catalog numbers in this catalog refer to both surface and window mount panel meters. To specify your choice, replace the □ in the catalog number with either of the following: 0 for Surface Mount (Taut Band), 1 for Window Mount (Taut Band), 4 for Surface Mount (Pivot & Jewel) or 5 for Window Mount (Pivot & Jewel). (1½" is only available in Surface Mount (Taut Band).)

AC Voltmeters

Rating & Scale \ Size	1½	2½	3½	4½
-----------------------	----	----	----	----

AC VOLTMETERS — TAUT BAND, MOVING COIL: SELF-CONTAINED, RECTIFIER TYPE

0-3 0-5 0-10 0-15 0-25	260130LJLJ 260130LSLS 260130MTMT 260130NDND 260130NJNJ	26□230LJLJ 26□230LSLS 26□230MTMT 26□230NDND 26□230NJNJ	26□330LJLJ 26□330LSLS 26□330MTMT 26□330NDND 26□330NJNJ	26□430LJLJ 26□430LSLS 26□430MTMT 26□430NDND 26□430NJNJ
0-50 0-100 0-150 0-300 0-500 0-600	260130NTNT 260130PKPK 260130PZPZ 260130RXRX 260130SFSF 260130SJSJ	26□230NTNT 26□230PKPK 26□230PZPZ 26□230RXRX 26□230SFSF 26□230SJSJ	26□330NTNT 26□330PKPK 26□330PZPZ 26□330RXRX 26□330SFSF 26□330SJSJ	26□430NTNT 26□430PKPK 26□430PZPZ 26□430RXRX 26□430SFSF 26□430SJSJ

AC VOLTMETERS — TAUT BAND, MOVING COIL: TRANSFORMER RATED, 0-150V, RECTIFIER TYPE*

S O N L Y S C A L E	0-750 0-1500 0-3000	260130PZSM 260130PZTC 260130PZUA	26□230PZSM 26□230PZTC 26□230PZUA	26□330PZSM 26□330PZTC 26□330PZUA	26□430PZSM 26□430PZTC 26□430PZUA
--	---------------------------	--	--	--	--

AC VOLTMETERS — TAUT BAND, MOVING COIL: EXPANDED SCALE, RECTIFIER TYPE

105-125 210-250 95-135 190-270	Accuracy ±0.5%FS ±0.5%FS ±1.0%FS ±1.0%FS	26□237PTPT 26□237RRRR 26□237PJPJ 26□237RKRK	26□337PTPT 26□337RRRR 26□337PJPJ 26□337RKRK	26□437PTPT 26□437RRRR 26□437PJPJ 26□437RKRK
---	--	--	--	--

AC VOLTMETERS — IRON VANE, PIVOT & JEWEL: SELF-CONTAINED, 60Hz*

0-500 0-5 0-10 0-15 0-30 0-50		26□244LJLJ 26□244LSLS 26□244MTMT 26□244NDND 26□244NLNL 26□244NTNT	26□344LJLJ 26□344LSLS 26□344MTMT 26□344NDND 26□344NLNL 26□344NTNT	26□444LJLJ 26□444LSLS 26□444MTMT 26□444NDND 26□444NLNL 26□444NTNT
0-100 0-150 0-300 0-500 0-600		26□244PKPK 26□244PZPZ 26□244RXRX 26□244SFSF 26□244SJSJ	26□344PKPK 26□344PZPZ 26□344RXRX 26□344SFSF 26□344SJSJ	26□444PKPK 26□444PZPZ 26□444RXRX 26□444SFSF 26□444SJSJ

AC VOLTMETERS — IRON VANE, PIVOT & JEWEL: TRANSFORMER RATED 0-150 VOLTS, 60Hz*

S O N L Y S C A L E	0-600 0-750 0-3K	26□244PZSJ 26□244PZSM 26□244PZVJ	26□344PZSJ 26□344PZSM 26□344PZVJ	26□444PZSJ 26□444PZSM 26□444PZVJ
--	------------------------	--	--	--

*Iron Vane, Pivot & Jewel use only 0 for Surface Mount, 1 for Window Mount. Also, For Transformer Rated Voltmeters See Page 29 For Transformers.

AC Ammeters

Rating & Scale \ Size	1½	2½	3½	4½
-----------------------	----	----	----	----

AC MILLIAMMETERS — TAUT BAND, MOVING COIL: SELF-CONTAINED, RECTIFIER TYPE

0-1 0-5 0-10 0-25 0-50	260110FAFA 260110FXFX 260110GZGZ 260110HJHJ 260110HYHY	26□210FAFA 26□210FXFX 26□210GZGZ 26□210HJHJ 26□210HYHY	26□310FAFA 26□310FXFX 26□310GZGZ 26□310HJHJ 26□310HYHY	26□410FAFA 26□410FXFX 26□410GZGZ 26□410HJHJ 26□410HYHY
0-100 0-200	260110JRJR —	26□210JRJR 26□210KAKA	26□310JRJR 26□310KAKA	26□410JRJR 26□410KAKA

AC Ammeters Cont'd

Rating & Scale \ Size	1½	2½	3½	4½
-----------------------	----	----	----	----


AC AMMETERS — TAUT BAND, MOVING COIL: SELF-CONTAINED, RECTIFIER TYPE, 60Hz±10%

0-1 0-1.5 0-2 0-3 0-5		26□210LALA 26□210LCLC 26□210LELE 26□210LJLJ 26□210LSLS	26□310LALA 26□310LCLC 26□310LELE 26□310LJLJ 26□310LSLS	26□410LALA 26□410LCLC 26□410LELE 26□410LJLJ 26□410LSLS
0-10 0-15 0-20 0-25 0-30		26□210MTMT 26□210NDND 26□210NGNG 26□210NJNJ 26□210NLNL	26□310MTMT 26□310NDND 26□310NGNG 26□310NJNJ 26□310NLNL	26□410MTMT 26□410NDND 26□410NGNG 26□410NJNJ 26□410NLNL

AC AMMETERS — TAUT BAND, MOVING COIL: TRANSFORMER RATED, 0-5A, RECTIFIER TYPE, 60Hz±10%

0-50 0-60 0-75 0-100 0-150 0-200		26□210LSNT 26□210LSNW 26□210LSPB 26□210LSPK 26□210LSPZ 26□210LSRL	26□310LSNT 26□310LSNW 26□310LSPB 26□310LSPK 26□310LSPZ 26□310LSRL	26□410LSNT 26□410LSNW 26□410LSPB 26□410LSPK 26□410LSPZ 26□410LSRL
0-300 0-400 0-500 0-600 0-800		26□210LSRX 26□210LSSC 26□210LSSF 26□210LSSJ 26□210LSSN	26□310LSRX 26□310LSSC 26□310LSSF 26□310LSSJ 26□310LSSN	26□410LSRX 26□410LSSC 26□410LSSF 26□410LSSJ 26□410LSSN
0-1000 0-1500 0-2000		26□210LSSS 26□210LSTC 26□210LSTM	26□310LSSS 26□310LSTC 26□310LSTM	26□410LSSS 26□410LSTC 26□410LSTM

AC AMMETERS — TAUT BAND, MOVING COIL: SEPARATE TRANSFORMERS, RECTIFIER TYPE, 60Hz±10%

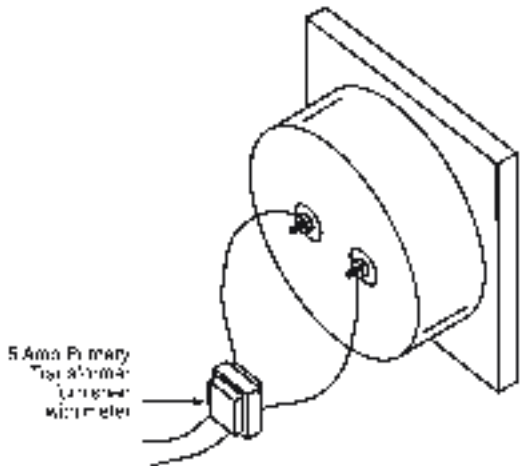0-1 0-1.5 0-2 0-3 0-5	260110LALA 260110LCLC 260110LELE 260110LJLJ 260110LSLS	EACH METER IS SUPPLIED WITH AN EXTERNAL C.T. WITH INPUT RANGE MATCHING FULL SCALE INPUT.	
0-10 0-15 0-20 0-25 0-30	260110MTMT 260110NDND 260110NGNG 260110NJNJ 260110NLNL		
0-50 0-60 0-75 0-100 0-150	260110LSNT 260110LSNW 260110LSPB 260110LSPK 260110LSPZ	METER SUPPLIED WITH 5 AMP EXTERNAL C.T. — USER MUST PURCHASE ADDITIONAL C.T. OF PROPER SCALE RANGE WITH 5 AMP SECONDARY TO CONNECT TO EXT. 5 AMP C.T. SUPPLIED, SEE CATALOG 500 CTP.T.	
0-200 0-300 0-400 0-500 0-600	260110LSRL 260110LSRX 260110LSSC 260110LSSF 260110LSSJ		
0-800 0-1000 0-1500 0-2000	260110LSSN 260110LSSS 260110LSTC 260110LSTM		

AC MILLIAMMETERS — IRON VANE, PIVOT & JEWEL: SELF-CONTAINED, 50-400Hz*

0-10 0-25 0-50 0-100 0-250 0-500		26□240GZGZ 26□240HJHJ 26□240HYHY 26□240JRJR 26□240KDKD 26□240KMKM	26□340GZGZ 26□340HJHJ 26□340HYHY 26□340JRJR 26□340KDKD 26□340KMKM	26□440GZGZ 26□440HJHJ 26□440HYHY 26□440JRJR 26□440KDKD 26□440KMKM
---	--	--	--	--

NOTE ON ORDERING: The ranges and catalog numbers in this catalog refer to both surface and window mount panel meters. To specify your choice, replace the □ in the catalog number with either of the following: 0 for Surface Mount (Taut Band), 1 for Window Mount (Taut Band), 4 for Surface Mount (Pivot & Jewel) or 5 for Window Mount (Pivot & Jewel). (1½" is only available in Surface Mount (Taut Band). *Iron Vane, Pivot & Jewel use only 0 for Surface Mount, 1 for Window Mount.

AC Ammeters Cont'd

Rating & Scale \ Size	1½	2½	3½	4½
-----------------------	----	----	----	----

AC AMMETERS — IRON VANE, PIVOT & JEWEL: SELF-CONTAINED, 50-400Hz*

0-1 0-1.5 0-2 0-3 0-5 0-10 0-15 0-20 0-25 0-30 0-50		26 □ 240LALA 26 □ 240LCLC 26 □ 240LELE 26 □ 240LJLJ 26 □ 240LSLS 26 □ 240MTMT 26 □ 240NDND 26 □ 240NGNG 26 □ 240NJNJ 26 □ 240NLNL 26 □ 240NTNT	26 □ 340LALA 26 □ 340LCLC 26 □ 340LELE 26 □ 340LJLJ 26 □ 340LSLS 26 □ 340MTMT 26 □ 340NDND 26 □ 340NGNG 26 □ 340NJNJ 26 □ 340NLNL 26 □ 340NTNT	26 □ 440LALA 26 □ 440LCLC 26 □ 440LELE 26 □ 440LJLJ 26 □ 440LSLS 26 □ 440MTMT 26 □ 440NDND 26 □ 440NGNG 26 □ 440NJNJ 26 □ 440NLNL 26 □ 440NTNT
---	--	--	--	--

AC AMMETERS — IRON VANE, PIVOT & JEWEL: TRANSFORMER RATED, 0-5 AMPERES, 50-400Hz*

0-10 0-15 0-20 0-30 0-40 0-50 0-75 0-80 0-100 0-150 0-200 0-300 0-400 0-500 0-600 0-800 0-1K 0-1.2K 0-1.5K 0-2.0K 0-3.0K		26 □ 240LSMT 26 □ 240LSND 26 □ 240LSNG 26 □ 240LSNL 26 □ 240LSNP 26 □ 240LSNT 26 □ 240LSPB 26 □ 240LSPD 26 □ 240LSPK 26 □ 240LSPZ 26 □ 240LSRL 26 □ 240LSRX 26 □ 240LSSC 26 □ 240LSSF 26 □ 240LSSJ 26 □ 240LSSN 26 □ 240LSVA 26 □ 240LSVB 26 □ 240L SVC 26 □ 240L SVE 26 □ 240L SVJ	26 □ 340LSMT 26 □ 340LSND 26 □ 340LSNG 26 □ 340LSNL 26 □ 340LSNP 26 □ 340LSNT 26 □ 340LSPB 26 □ 340LSPD 26 □ 340LSPK 26 □ 340LSPZ 26 □ 340LSRL 26 □ 340LSRX 26 □ 340LSSC 26 □ 340LSSF 26 □ 340LSSJ 26 □ 340LSSN 26 □ 340LSVA 26 □ 340LSVB 26 □ 340L SVC 26 □ 340L SVE 26 □ 340L SVJ	26 □ 440LSMT 26 □ 440LSND 26 □ 440LSNG 26 □ 440LSNL 26 □ 440LSNP 26 □ 440LSNT 26 □ 440LSPB 26 □ 440LSPD 26 □ 440LSPK 26 □ 440LSPZ 26 □ 440LSRL 26 □ 440LSRX 26 □ 440LSSC 26 □ 440LSSF 26 □ 440LSSJ 26 □ 440LSSN 26 □ 440LSVA 26 □ 440LSVB 26 □ 440L SVC 26 □ 440L SVE 26 □ 440L SVJ
--	--	---	---	---

*Iron Vane, Pivot & Jewel use only 0 for Surface Mount, 1 for Window Mount. Also see Page 29 For Transformer-Rated Meters

Frequency Meters (For 480V AC input contact factory)

Voltage	Center Frequency	Scale Hertz	1½	2½	3½	4½
---------	------------------	-------------	----	----	----	----

FREQUENCY METERS — TAUT BAND OR PIVOT & JEWEL: SELF-CONTAINED

120 120 120 120	50 55 60 400	45-55 45-65 55-65 380-420		26 □ 250AGAG 26 □ 250AJAJ 26 □ 250ANAN 26 □ 250BKBK 26 □ 250GGGG 26 □ 250GJGJ 26 □ 250GNNGN 26 □ 250HKHK 26 □ 250DGDG 26 □ 250DNDN 26 □ 250EKEK 26 □ 250DJDJ	26 □ 350AGAG 26 □ 350AJAJ 26 □ 350ANAN 26 □ 350BKBK 26 □ 350GGGG 26 □ 350GJGJ 26 □ 350GNNGN 26 □ 350HKHK 26 □ 350DGDG 26 □ 350DNDN 26 □ 350EKEK 26 □ 350DJDJ	26 □ 450AGAG 26 □ 450AJAJ 26 □ 450ANAN 26 □ 450BKBK 26 □ 450GGGG 26 □ 450GJGJ 26 □ 450GNNGN 26 □ 450HKHK 26 □ 450DGDG 26 □ 450DNDN 26 □ 450EKEK 26 □ 450DJDJ
--------------------------	-----------------------	------------------------------------	--	---	---	---

NOTE ON ORDERING: The ranges and catalog numbers in this catalog refer to both surface and window mount panel meters. To specify your choice, replace the □ in the catalog number with either of the following: 0 for Surface Mount (Taut Band), 1 for Window Mount (Taut Band), 4 for Surface Mount (Pivot & Jewel) or 5 for Window Mount (Pivot & Jewel).

YOKOGAWA ♦ Terminal Resistance Values

ALL VALUES ARE $\pm 15\%$ TOLERANCE

New Big Look and Horizon Line

Rating and Scale	Taut Band	Pivot and Jewel
------------------	-----------	-----------------

DC Voltmeters (See pages 2, 3, 8)

DC VOLTMETER — ZERO-LEFT

1.0 Volts 1.5 Volts 3 Volts 5 Volts 8 Volts 10 Volts 15 Volts 30 Volts 80 Volts 100 Volts 150 Volts 200 Volts 250 Volts 300 Volts 500 Volts 600 Volts	1,000 Ohms/Volt	1,000 Ohms/Volts
--	-----------------	------------------

DC VOLTMETERS — ZERO-LEFT, RATED 0-1 mA DC, FOR USE WITH EXTERNAL RESISTORS

SCALE 500 Volts 600 Volts 750 Volts	10.5 Ohms 10.5 Ohms 10.5 Ohms	42.4 Ohms 42.4 Ohms 42.4 Ohms
--	-------------------------------------	-------------------------------------

DC VOLTMETERS — ZERO-CENTER

5-0-5 Volts 10-0-10 Volts 30-0-30 Volts 50-0-50 Volts 80-0-80 Volts 150-0-150 Volts 300-0-300 Volts 500-0-500 Volts 600-0-600 Volts	1,000 Ohms/Volt	1,000 Ohms Volt
---	-----------------	-----------------

DC VOLTMETERS — ZERO-CENTER, RATED 1-0-1 mA DC, FOR USE WITH EXTERNAL RESISTORS

SCALE 500-0-500 Volts 600-0-600 Volts 750-0-750 Volts	6.8 Ohms 6.8 Ohms 6.8 Ohms	22.4 Ohms 22.4 Ohms 22.4 Ohms
--	----------------------------------	-------------------------------------

DC Ammeters (See pages 3-5, 8-10)

DC MICROAMMETERS — ZERO-LEFT

20 μ A 50 μ A 100 μ A 200 μ A 500 μ A	2000 Ohms 2000 Ohms 484 Ohms 121 Ohms 40 Ohms	 980 Ohms 228 Ohms
---	---	---

DC MICROAMMETERS — ZERO-CENTER

20-0-20 μ A 50-0-50 μ A 100-0-100 μ A 200-0-200 μ A 500-0-500 μ A	12000 Ohms 484 Ohms 121 Ohms 750 Ohms 10.5 Ohms	 980 Ohms 228 Ohms 42.4 Ohms
---	---	---

New Big Look and Horizon Line

Rating and Scale	Taut Band	Pivot and Jewel
------------------	-----------	-----------------

DC MILLIAMMETERS — ZERO-LEFT

1 mA 5 mA 10 mA 20 mA 25 mA 30 mA 50 mA 80 mA 100 mA 150 mA 200 mA 250 mA 300 mA 500 mA 800 mA	10.5 Ohms 20 Ohms 5.0 Ohms 2.39 Ohms 1.99 Ohms 1.66 Ohms 1.0 Ohms 0.64 Ohms 0.50 Ohms 0.33 Ohms 0.25 Ohms 0.2 Ohms 0.16 Ohms 0.10 Ohms 0.06 Ohms	42.4 Ohms 10.0 Ohms 5.0 Ohms 2.4 Ohms 2.0 Ohms 1.7 Ohms 1.0 Ohms 0.63 Ohms 0.50 Ohms 0.33 Ohms 0.25 Ohms 0.20 Ohms 0.167 Ohms 0.100 Ohms 0.063 Ohms
--	--	---

DC MILLIAMMETERS — ZERO-CENTER


1-0-1 mA 5-0-5 mA 10-0-10 mA 20-0-20 mA 25-0-25 mA 30-0-30 mA 50-0-50 mA 100-0-50 mA 150-0-150 mA 200-0-200 mA 250-0-250 mA 300-0-300 mA 500-0-500 mA	6.8 Ohms 5.0 Ohms 2.4 Ohms 1.2 Ohms 1.0 Ohms 0.88 Ohms 0.51 Ohms 0.51 Ohms 0.33 Ohms 0.25 Ohms 0.2 Ohms 0.17 Ohms 0.10 Ohms	22.4 Ohms 9.7 Ohms 4.9 Ohms 2.4 Ohms 2.0 Ohms 1.7 Ohms 1.0 Ohms 0.51 Ohms 0.33 Ohms 0.25 Ohms 0.20 Ohms 0.168 Ohms 0.100 Ohms
---	---	---

DC AMMETERS — ZERO-LEFT

1 Amp 1.5 Amp 2 Amp 3 Amp 5 Amp 10 Amp 15 Amp 20 Amp 30 Amp 50 Amp	0.050 Ohms 0.033 Ohms 0.025 Ohms 0.0169 Ohms 0.010 Ohms 0.0050 Ohms 0.0033 Ohms 0.0025 Ohms 0.00167 Ohms 0.00100 Ohms	0.050 Ohms 0.033 Ohms 0.025 Ohms 0.0169 Ohms 0.0100 Ohms 0.0050 Ohms 0.0033 Ohms 0.0025 Ohms 0.00167 Ohms 0.00100 Ohms
---	--	---

DC AMMETERS — ZERO-LEFT, 50 mV, SHUNT RATED

20 Amp 30 Amp 50 Amp 75 Amp 100 Amp 150 Amp 200 Amp 250 Amp 300 Amp 400 Amp 500 Amp 600 Amp 800 Amp 1 Kiloamp 1.5 Kiloamp 2 Kiloamp	25 Ohms Calibrated for use with two-way Shunt lead resistance of 0.065 Ohms	12.5 Ohms Calibrated for use with two-way Shunt lead resistance of 0.065 Ohms
--	--	--



New Big Look and Horizon Line		
Rating and Scale	Taut Band	Pivot and Jewel

DC AMMETERS — ZERO-LEFT, 100 mV, SHUNT RATED

20 Amp 40 Amp 50 Amp 75 Amp 100 Amp	50 Ohms	25 Ohms
150 Amp 200 Amp 250 Amp 300 Amp 400 Amp	Calibrated for use with two-way Shunt lead resistance of 0.065 Ohms	Calibrated for use with two-way Shunt lead resistance of 0.065 Ohms
500 Amp 600 Amp 800 Amp 1 Kiloamp 2 Kiloamp		

DC AMMETERS — ZERO-CENTER

1-0-1 Amp 2-0-2 Amp 5-0-5 Amp 10-0-10 Amp 15-0-15 Amp	0.0500 Ohms 0.0250 Ohms 0.0100 Ohms 0.0050 Ohms 0.0033 Ohms	0.0500 Ohms 0.0250 Ohms 0.0100 Ohms 0.0050 Ohms 0.0033 Ohms
20-0-20 Amp 30-0-30 Amp 50-0-50 Amp	0.0025 Ohms 0.00167 Ohms 0.00100 Ohms	0.0025 Ohms 0.00167 Ohms 0.00100 Ohms

DC AMMETERS — ZERO-CENTER, 50 mV, SHUNT RATED

20-0-20 Amp 50-0-50 Amp 75-0-75 Amp 100-0-100 Amp 150-0-150 Amp	50 Ohms	25 Ohms
	Calibrated for use with two-way Shunt lead resistance of 0.065 Ohms	Calibrated for use with two-way Shunt lead resistance of 0.065 Ohms

AC Voltmeters (IRON VANE) See pages 5-6, 10-11

AC VOLTMETERS, SELF-CONTAINED, 60 Hz

3 Volts 5 Volts 10 Volts 15 Volts 30 Volts		11.1 Ohms 29.0 Ohms 110 Ohms 251 Ohms 779 Ohms
50 Volts 100 Volts 150 Volts 300 Volts 500 Volts		2,500 Ohms 10,000 Ohms 15,000 Ohms 70,260 Ohms 117,260 Ohms
600 Volts		140,000 Ohms

AC VOLTMETERS, SELF-CONTAINED, 400 Hz (IRON VANE)

150 Volts 300 Volts		15,268 Ohms 70,900 Ohms
------------------------	--	----------------------------

AC VOLTMETERS, TRANSFORMER RATED, 60 Hz, 150 Volts (IRON VANE)

SCALE ONLY 600 Volts 750 Volts 3 Kv		15,000 Ohms 15,000 Ohms 15,000 Ohms
--	--	---

New Big Look and Horizon Line		
Rating and Scale	Taut Band	Pivot and Jewel

AC VOLTMETERS (RECTIFIER TYPE)

10 Volts 15 Volts 20 Volts 25 Volts 30 Volts	1,000 Ohms/Volt	1,000 Ohms/Volt
50 Volts 80 Volts 100 Volts 150 Volts 200 Volts		
250 Volts 300 Volts		

AC Ammeters (See pages 6-7, 11-12)

AC MILLIAMMETERS, SELF-CONTAINED, 25-400 Hz (IRON VANE)

10 mA 25 mA 50 mA 100 mA 200 mA		2158 Ohms 341 Ohms 84 Ohms 21 Ohms 4.1 Ohms
500 mA		0.7 Ohms

AC AMMETERS — SELF-CONTAINED, 25-400 Hz (IRON VANE)

1 Amp 3 Amp 5 Amp 8 Amp 10 Amp		0.17 Ohms 0.015 Ohms 0.007 Ohms 0.003 Ohms 0.0024 Ohms
15 Amp 20 Amp 30 Amp 50 Amp 80 Amp		0.0016 Ohms 0.001 Ohms 0.0006 Ohms 0.0004 Ohms 0.0004 Ohms

AC AMMETERS — TRANSFORMER RATED 60 Hz (IRON VANE) 5 AMPERES

10 Amp 15 Amp 20 Amp 30 Amp 40 Amp		
50 Amp 75 Amp 80 Amp 100 Amp 150 Amp		0.007 Ohms
200 Amp 300 Amp 400 Amp 500 Amp 600 Amp 800 Amp		
1 Kiloamp 1.2 Kiloamp 1.5 Kiloamp 2.0 Kiloamp 3.0 Kiloamp		

ALL VALUES ARE ±15% TOLERANCE

Stylist Series

Rating and Scale	Taut Band	Pivot and Jewel
------------------	-----------	-----------------

DC Voltmeters (See page 14)

DC MILLIVOLTMETERS — ZERO-LEFT

50 mV	10 Ohms	12.5 Ohms
100 mV	20 Ohms	25 Ohms

DC MILLIVOLTMETERS — ZERO-CENTER

50-0-50 mV	20 Ohms	25 Ohms
100-0-100 mV	40 Ohms	50 Ohms

DC VOLTMETERS — ZERO-LEFT

1 Volt thru 500 Volts 600 Volts	1000 Ohms/Volt 10000 Ohms/Volt	1000 Ohms/Volt 10000 Ohms/Volt
------------------------------------	-----------------------------------	-----------------------------------

DC VOLTMETERS — ZERO-CENTER

5-0-5 Volts thru 500-0-500 Volts 600-0-600 Volts	1000 Ohms/Volt 10000 Ohms/Volt	
---	-----------------------------------	--

DC Ammeters (See pages 15-16)

DC MICROAMMETERS — ZERO-LEFT

10 uA	5900 Ohms	N/A
20 uA	4600 Ohms	N/A
50 uA	2000 Ohms	6000 Ohms
100 uA	660 Ohms	1950 Ohms
200 uA	190 Ohms	980 Ohms
500 uA	116 Ohms	228 Ohms

DC MICROAMMETERS — ZERO-CENTER

10-0-10 uA	4600 Ohms	N/A
25-0-25 uA	2000 Ohms	6000 Ohms
50-0-50 uA	660 Ohms	1950 Ohms
100-0-100 uA	190 Ohms	980 Ohms
500-0-500 uA	32 Ohms	42.4 Ohms

DC MILLIAMMETERS — ZERO-LEFT

1 mA	32 Ohms	42.4 Ohms
2 mA	11.2 Ohms	22 Ohms
3 mA	30 Ohms	*
5 mA	3.5 Ohms	*
10 mA	4.9 Ohms	*
15 mA	3.3 Ohms	*
20 mA	2.5 Ohms	*
25 mA	1.9 Ohms	*
30 mA	1.7 Ohms	*
50 mA	1.0 Ohms	*
100 mA	0.49 Ohms	*
150 mA	0.33 Ohms	*
200 mA	0.25 Ohms	*
300 mA	0.17 Ohms	*
500 mA	0.10 Ohms	*
750 mA	0.067 Ohms	*

Stylist Series

Rating and Scale	Taut Band	Pivot and Jewel
------------------	-----------	-----------------

DC MILLIAMMETERS — ZERO-CENTER

1-0-1 mA	11.2 Ohms	22 Ohms
5-0-5 mA	9.9 Ohms	*
10-0-10 mA	5.0 Ohms	*
25-0-25 mA	2.0 Ohms	*
50-0-50 mA	1.0 Ohms	*
100-0-100 mA	0.53 Ohms	*
200-0-200 mA	0.25 Ohms	*
500-0-500 mA	0.10 Ohms	*

DC MILLIAMMETERS — SUPPRESSED ZERO

(Indicating receiving guage applications)

0.25-1.25 mA	32 Ohms	42.4 Ohms
1-5 mA	31 Ohms	*
4-20 mA	6.2 Ohms	*
10-50 mA	2.4 Ohms	*

DC AMMETERS — ZERO-LEFT, SELF-CONTAINED

1 Amp	0.05 Ohms	*
1.5 Amp	0.033 Ohms	*
2 Amp	0.025 Ohms	*
3 Amp	0.017 Ohms	*
5 Amp	0.010 Ohms	*
10 Amp	0.0050 Ohms	*
15 Amp	0.0033 Ohms	*
20 Amp	0.0025 Ohms	*
25 Amp	0.0020 Ohms	*
30 Amp	0.0017 Ohms	*
50 Amp	0.0010 Ohms	*

DC AMMETERS — ZERO-LEFT, 50mV, SHUNT RATED

15 Amps thru 2000 Amps	10 Ohms	*
------------------------	---------	---

Stylist Series

Rating and Scale	Pivot and Jewel
------------------	-----------------

DC AMMETERS — ZERO-LEFT, 100mV, SHUNT RATED

75 Amps thru 2000 Amps	20 Ohms
------------------------	---------

DC AMMETERS — ZERO-CENTER, SELF-CONTAINED

1-0-1 Amp	0.050 Ohms
3-0-3 Amp	0.017 Ohms
5-0-5 Amp	0.010 Ohms
10-0-10 Amp	0.0050 Ohms
15-0-15 Amp	0.0033 Ohms
25-0-25 Amp	0.0020 Ohms
50-0-50 Amp	0.0010 Ohms

DC AMMETERS — ZERO-CENTER, 50mV, SHUNT RATED

15-0-15 Amps thru 500-0-500 Amps	20 Ohms
----------------------------------	---------

*Contact factory

Stylist Series	
Rating and Scale	Taut Band

AC Voltmeters (See page 17)

AC VOLTMETERS — SELF-CONTAINED, RECTIFIER TYPE

3 Volts thru 600 Volts	900 Ohms/Volt
------------------------	---------------

AC VOLTMETERS — TRANSFORMER RATED, 0-150V, RECTIFIER TYPE

750 Volts through 3000 Volts (SCALE ONLY)	130 KOhms
--	-----------

AC VOLTMETERS — EXPANDED SCALE, RECTIFIER TYPE

105-125 Volts thru 190-270 Volts	225 Ohms/Volt
-------------------------------------	---------------

Stylist Series	
Rating and Scale	Pivot & Jewel

AC VOLTMETERS — IRON VANE, SELF-CONTAINED, 60 Hz

3 Volts	11.1 Ohms
5 Volts	29.0 Ohms
10 Volts	110.0 Ohms
15 Volts	251.0 Ohms
30 Volts	779.0 Ohms
50 Volts	2.5 KOhms
100 Volts	10.1 KOhms
150 Volts	15.1 KOhms
300 Volts	70.3 KOhms
500 Volts	117.3 KOhms
600 Volts	139.9 KOhms

AC VOLTMETERS — IRON VANE, TRANSFORMER RATED, 150 VOLTS, 60Hz

600 Volts through 3KVolts (SCALE ONLY)	15.1 KOhms
---	------------

Stylist Series		
Rating and Scale	Taut Band	Pivot and Jewel

AC Ammeters (See pages 17-19)

AC MILLIAMMETERS — SELF-CONTAINED, RECTIFIER TYPE

1 mA	630 Ohms	*
5 mA	180 Ohms	*
10 mA	95 Ohms	*
25 mA	39 Ohms	*
50 mA	35 Ohms	*
100 mA	18 Ohms	*
200 mA	9 Ohms	*
500 mA	.20 Ohms	*

Stylist Series		
Rating and Scale	Taut Band	Pivot and Jewel

AC AMMETERS — SELF-CONTAINED, RECTIFIER TYPE

1 Amp	.09 Ohms	*
1.5 Amp	.07 Ohms	*
2 Amp	.05 Ohms	*
3 Amp	.03 Ohms	*
5 Amp	0.2 Ohms	*
10 Amp	0.1 Ohms	*
15 Amp	.007 Ohms	*
20 Amp	.005 Ohms	*
25 Amp	.005 Ohms	*
30 Amp	.003 Ohms	*
50 Amp	.002 Ohms	*

AC AMMETERS — TRANSFORMER RATED, 0-5A, RECTIFIER TYPE

60 Amps thru 2000 Amps (SCALE ONLY)	.02 Ohms	*
--	----------	---

AC AMMETERS — SEPARATE TRANSFORMER RECTIFIER TYPE (1½" SIZE)

50 Amps thru 2000 Amps	.015 Ohms	*
------------------------	-----------	---

Stylist Series	
Rating and Scale	Pivot & Jewel

AC MILLIAMMETERS — IRON VANE, SELF-CONTAINED, 50-400Hz

10 mA	2.158 KOhms
25 mA	341.0 Ohms
50 mA	83.7 Ohms
100 mA	21.0 Ohms
250 mA	2.75 Ohms
500 mA	.704 Ohms

AC AMMETERS — IRON VANE, SELF-CONTAINED, 50-400 Hz

1 Amp	.17 Ohms
1.5 Amps	.110 Ohms
2 Amps	.044 Ohms
3 Amps	.0153 Ohms
5 Amps	.0071 Ohms
10 Amps	.0024 Ohms
15 Amps	.0017 Ohms
20 Amps	.0009 Ohms
25 Amps	.0007 Ohms
30 Amps	.0006 Ohms
50 Amps	.0004 Ohms

AC AMMETERS — IRON VANE, TRANSFORMER RATED, 0-5 AMPS, 50-400Hz

10 Amps thru 3KAmps (Scale Only)	.0071 Ohms
-------------------------------------	------------

*Contact Factory

YOKOGAWA ♦ Elapsed Time Meters



Back of Panel
Unmounted



New Big Look
Panel Mounted



Square Case



Round Case



Conduit Case

Specifications

Accuracy: Matches frequency control of power system.

Vibration Shock: Meets ANSI Specification C39.1

Materials: Case of clear Polycarbonate, frame of black Polycarbonate, brass terminal studs, Polycarbonate front covers.

Safety: Type 240 elapsed-time meters are recognized under the Component Program of Underwriters' Laboratories. (UL File #E44857) & CSA

Input Range: All Type 240 models available to operate on 120 or 208/240 or 480 volts AC, 50 or 60 Hertz.

Sealing: All non-reset Type 240 models are weather resistant. Sealed window and no-through screw holes for flange or back-of-panel mounting protect motor, counter, and gearing from rain or panel wash-down.

Presentation: 6-digit counter in $\frac{1}{2}$ " high hours and tenths of hours or minutes and tenths of minutes.

Insulation Level: Operating at 120, 208, 240 or 480 volts AC, will pass Hi-pot of 2000 VRMS for one minute.

Burden: 3 Watts typical.

Dimensions: See pages 38 & 39.

Motor: Telechron, Model S-1.

Features:

- Back-of-panel model
- 2½" and 3½" New Big Look models
- 2½" and 3½" Round and Square models
- Conduit-case models
- Complete interchangeability physically and electrically with most GE Types 235 and 236 models
- Optional 3 stud mounting is available on 3½" New Big Look style 240 meters only.

Motor Volt AC	Nonreset Type		Reset Type	
	Register in Minutes	Register in Hours	Register in Minutes	Register in Hours

2½-INCH NEW BIG LOOK — 60Hz

120 208/240 480	240 213 AAAB 240 213 ABAB 240 213 ACAB	240 211 AAAB 240 211 ABAB 240 211 ACAB	240 214 AAAB 240 214 ABAB 240 214 ACAB	240 212 AAAB 240 212 ABAB 240 212 ACAB
-----------------------	--	--	--	--

3½-INCH NEW BIG LOOK — 60 Hz

120 208/240 480	240 313 AAAB 240 313 ABAB 240 313 ACAB	240 311 AAAB 240 311 ABAB 241 311 ACAB	240 314 AAAB 240 314 ABAB 240 314 ACAB	240 312 AAAB 240 312 ABAB 240 312 ACAB
-----------------------	--	--	--	--

SQUARE CASE 2½-INCH — 60 Hz

120 208/240 480	240 613 AAAD 240 613 ABAD 240 613 ACAD	240 611 AAAD 240 611 ABAC 240 611 ACAD	240 614 AAAD 240 614 ABAD 240 614 ACAD	240 612 AAAD 240 612 ABAD 240 612 ACAD
-----------------------	--	--	--	--

SQUARE CASE 3½-INCH — 60 Hz


120 208/240 408	240 713 AAAD 240 713 ABAD 240 713 ACAD	240 711 AAAD 240 711 ABAD 240 711 ACAD	240 714 AAAD 240 714 ABAD 240 714 ACAD	240 712 AAAD 240 712 ABAD 240 712 ACAD
-----------------------	--	--	--	--

ROUND CASE 2½-INCH — 60 Hz

120 208/40 480	240 633 AAAB 240 633 ABAB 240 633 ACAB	240 631 AAAB 240 631 ABAB 240 631 ACAB	240 634 AAAB 240 634 ABAB 240 634 ACAB	240 632 AAAB 240 632 ABAB 240 632 ACAB
----------------------	--	--	--	--

ROUND CASE 3½-INCH — 60 Hz

120 208/40 480	240 733 AAAB 240 733 ABAB 240 733 ACAB	240 731 AAAB 240 731 ABAB 240 731 ACAB	240 734 AAAB 240 734 ABAB 240 734 ACAB	240 732 AAAB 240 732 ABAB 240 732 ACAB
----------------------	--	--	--	--



BACK-OF-PANEL — 60 Hz

120 208/240 480	240 003 AAAA 240 003 ABAA 240 003 ACAA	240 001 AAAA 240 001 ABAA 240 001 ACAA	240 004 AAAA 240 004 ABAA 240 004 ACAA	240 002 AAAA 240 002 ABAA 240 002 ACAA
-----------------------	--	--	--	--

CONDUIT-MOUNTED CASE 2½-INCH — 60 Hz†

120 208/240 480	240 253 AAFF 240 253 ABAF 240 253 ACAF	240 251 AAFF 240 251 ABAF 240 251 ACAF		
-----------------------	--	--	--	--

† Replacement meters for conduit-mounted case models not available as a separate item. However, motors can be supplied as a renewal part.

50-HERTZ RATINGS FOR NEW BIG LOOK

For 50 Hz service simply select the identical 60 Hz catalog number and change letters 7 & 8 as follows:

240213 ** AB

AA = 120V, 60 Hz

AB = 208/240V, 60 Hz

AC = 480V, 60 Hz

AD = 120V, 50 Hz

AE = 208/240V, 50 Hz

AF = 480V, 50 Hz

OPTIONAL 3-STUD MOUNTING

For 3-stud mounting option (3½" New Big Look only) simply select the identical 4-stud catalog number and change letters 9 & 10 as follows:

240313AA**

AB = Std 4 stud mounting

AC = Optional 3 stud mounting

Conduit case #2579K10G0700 can be ordered as a replacement item for the 240 25**** elapsed time meter assembly or for use with a 2½" Big Look meter.


Edgewise Panel Meters



Type 185 Edgewise Panel Meters



Type 185
3 Stack Mounted



Type 185
2 Stack Mounted



Horizontal Type 185



Type 185
Vertical
Meter with Bezel

Features: Completely shielded case. No special calibration required for panel material — Dust-tight cases — Stack mounting of meters is possible with all sides of meter case flush — Optional bezel and mounting bracket for 1- or 3-unit stack — Zero regulator provided in rear of case.

NOTE: Mounting hardware is not included.

Accuracy: DC Meters ±2% of full scale. AC rectifier type ±3% (60 Hertz sine wave at 25°C).

Overload: Voltmeter — 50% momentary. 20% sustained. Ammeter — 900% momentary. 20% sustained.

Scale Data: 53 degrees rotation. Length — 1.785".

Insulation Level: 1800 VRMS Hi-pot.

Response Time:

3 seconds (max.) for microammeters; 2 seconds (max.) for all other DC ratings; and 2.5 seconds (max.) for AC ratings.

Overshoot: Maximum of 40%.

Dimensions: See page 37.

Bezel and Mounting Assembly	Type of Mounting	Cat. No.
Assembly includes — Bezel mounting bracket(s), bolts, nuts, washers, speed nuts	For mounting one meter only	4149K16G0778
	For stack mounting three meters	4149K16G0780

DC Ratings

Rating and Scale	Terminal Resistance Ohms $\pm 15\%$	Horizontal Scale	Vertical Scale
------------------	--	------------------	----------------

DC VOLTMETERS — ZERO-LEFT, ZERO-BOTTOM, SELF-CONTAINED, LINEAR-SCALE 1000 OHMS/VOLT

10 V 15 V 30 V 50 V 100 V 150 V 300 V	↑ 1000 Ohms/volt ↓	185 011 MTMT 185 011 NDND 185 011 NLNL 185 011 NTNT 185 011 PKPK 185 011 PZPZ 185 011 RXRX	185 013 MTMT 185 013 NDND 185 013 NLNL 185 013 NTNT 185 013 PKPK 185 013 PZPZ 185 013 RXRX
---	--------------------------	--	--

DC VOLTMETERS — ZERO-CENTER, SELF-CONTAINED, 2000 OHMS/VOLT

15-0-15 V 50-0-50 V 150-0-150 V	2000 Ohms/Volt 2000 Ohms/Volt 2000 Ohms/Volt	185 012 NDND 185 012 NTNT 185 012 PZPZ	185 014 NDND 185 014 NTNT 185 014 PZPZ
---------------------------------------	--	--	--

DC VOLTMETERS — ZERO-LEFT, ZERO-BOTTOM, RATED 0-1 mA, FOR USE WITH EXTERNAL RESISTORS, RESISTORS NOT INCLUDED (SEE PAGE 29 FOR RESISTORS)

500 V 600 V 750 V	34.4 Ohms 34.4 Ohms 34.4 Ohms	185 171 FASF 185 171 FASJ 185 171 FASM	185 173 FASF 185 173 FASJ 185 173 FASM
-------------------------	-------------------------------------	--	--

DC MICROAMMETERS — ZERO-LEFT, ZERO-BOTTOM, SELF-CONTAINED, LINEAR-SCALE

50 μ A 100 μ A 500 μ A	2200 Ohms 1100 Ohms 148 Ohms	185 111 CYCY 185 111 DRDR 185 111 EMEM	185 113 CYCY 185 113 DRDR 185 113 EMEM
--	------------------------------------	--	--

DC MICROAMMETERS — ZERO-CENTER, SELF-CONTAINED

50-0-50 μ A 500-0-500 μ A	1100 Ohms 34.4 Ohms	185 112 CYCY 185 112 EMEM	185 114 CYCY 185 114 EMEM
--------------------------------------	------------------------	------------------------------	------------------------------

DC MILLIAMMETERS — ZERO-LEFT, ZERO-BOTTOM, SELF-CONTAINED, LINEAR-SCALE

1 mA 5 mA 10 mA 20 mA 50 mA 100 mA 300 mA 500 mA	34.4 Ohms 10.2 Ohms 5.0 Ohms 2.6 Ohms 1.0 Ohms 0.5 Ohms 0.167 Ohms 0.100 Ohms	185 111 FAFA 185 111 FXFX 185 111 GZGZ 185 111 HFHF 185 111 HYHY 185 111 JRJR 185 111 KGKG 185 111 KMKM	185 113 FAFA 185 113 FXFX 185 113 GZGZ 185 113 HFHF 185 113 HYHY 185 113 JRJR 185 113 KGKG 185 113 KMKM
---	--	--	--

DC MILLIAMMETERS — ZERO-CENTER, SELF-CONTAINED

1-0-1 mA 5-0-5 mA 10-0-10 mA 50-0-50 mA 500-0-500 mA	50.6 Ohms 5.0 Ohms 2.6 Ohms 0.5 Ohms 0.05 Ohms	185 112 FAFA 185 112 FXFX 185 112 GZGZ 185 112 HYHY 185 112 KMKM	185 114 FAFA 185 114 FXFX 185 114 GZGZ 185 114 HYHY 185 114 KMKM
--	--	--	--

DC AMMETERS — ZERO-LEFT, ZERO-BOTTOM, SELF-CONTAINED, LINEAR-SCALE

1 Amp 5 Amp 10 Amp	.050 Ohms .010 Ohms .005 Ohms	185 111 LALA 185 111 LSLS 185 111 MTMT	185 113 LALA 185 113 LSLS 185 113 MTMT
--------------------------	-------------------------------------	--	--

DC AMMETERS — ZERO-CENTER, SELF-CONTAINED

5-0-5 Amp	.005 Ohms	185 112 LSLS	185 114 LSLS
-----------	-----------	--------------	--------------

DC AMMETERS — ZERO-LEFT, ZERO-BOTTOM, LINEAR-SCALE 50 mV SHUNT RATED, SHUNTS & LEADS NOT INCLUDED. (LEAD RES. RANGE: .05-.07 Ω)

20 Amp 50 Amp 300 Amp 500 Amp	12.7 Ohms 12.7 Ohms 12.7 Ohms 12.7 Ohms	185 121 ECNG 185 121 ECNT 185 121 ECRX 185 121 ECSF	185 123 ECNG 185 123 ECNT 185 123 ECRX 185 123 ECSF
--	--	--	--

AC Ratings

Rating and Scale	Terminal Resistance Ohms $\pm 15\%$	Horizontal Scale	Vertical Scale
------------------	--	------------------	----------------

AC VOLTMETERS — RECTIFIER TYPE, ACCURACY ± 3 PERCENT, SELF-CONTAINED, LINEAR-SCALE 1000 OHMS/VOLT

10 V 15 V 30 V 50 V 100 V 150 V	↑ 1000 Ohms/Volt ↓	185 051 MTMT 185 051 NDND 185 051 NLNL 185 051 NTNT 185 051 PKPK 185 051 PZPZ	185 053 MTMT 185 053 NDND 185 053 NLNL 185 053 NTNT 185 053 PKPK 185 053 PZPZ
--	--------------------------	--	--

AC MICROAMMETERS — RECTIFIER TYPE, ACCURACY ± 3 PERCENT, SELF-CONTAINED, LINEAR-SCALE


500 μ A	1000 Ohms	185 151 EMEM	185 153 EMEM
-------------	-----------	--------------	--------------

AC MILLIAMMETERS — RECTIFIER TYPE, ACCURACY ± 3 PERCENT, SELF-CONTAINED, LINEAR-SCALE

3 mA 5 mA 10 mA 20 mA	570 Ohms 147 Ohms 86 Ohms 57 Ohms	185 151 FAFA 185 151 FXFX 185 151 GZGZ 185 151 HFHF	185 153 FAFA 185 153 FXFX 185 153 GZGZ 185 153 HFHF
--------------------------------	--	--	--



Series 280 Thin Edgewise Panel Meters

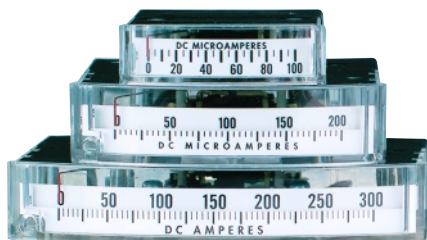

Specifications

These meters are designed to meet all applicable sections of ANSI C39.1.

Accuracy: $\pm 2\%$ of full scale, DC meters; $\pm 3\%$ with 60 Hz sine wave at 25°C for AC rectifier type meters.

Overload: DC Voltmeters — 20% momentary and sustained; DC ammeters (momentary) — 10 times the rated current for 10 consecutive intervals of .5 second with 1 minute intervals between successive applications; DC ammeters (sustained) — 20% for 6 hours.

Dielectric (Hi-pot): 1500 VRMS for 1½" and 2½" sizes; 2600 VRMS for 3½" size.

Response Time: 3 seconds max for μA meters, 2 seconds (max.) for mA, A, mV, & V meters.

Pointer Color: red standard.

Bezel and Mounting Hardware: Included with meter. See below for additional information.

Overshoot: 25% (max.) for 1½" size, 40% (max.) for 2½" and 3½" sizes.

Scale Data: All three sizes designed for 53 degrees deflection. Scale lengths are 1½" size = 1.25", 2½" size = 1.93", 3½" size = 2.70".
Note: All scales have linear distributions. 10V, 15V, 30V Rectifier scales will be non-linear.

Dimensions: See page 38.

Mounting Hardware

Item	Cat. No.
Bezel and Hardware Kit 1½"	4149K18G0001
Bezel and Hardware Kit 2½"	4149K18G0003
Bezel and Hardware Kit 3½"	4149K18G0004
Bezel for 2½" Meters Stacked	4149K18G0002

Series 280 DC Voltmeters (Taut Band)

Size		1½"		2½"		3½"	
Rating and Scale	Terminal Resistance Ohms $\pm 15\%$	Horizontal Scale	Vertical Scale	Horizontal Scale	Vertical Scale	Horizontal Scale	Vertical Scale

DC VOLTMETERS

0-10 Volts	1000 Ohms/Volt	286 011 MTMT	286 013 MTMT	287 011 MTMT	287 013 MTMT	288 011 MTMT	288 013 MTMT
0-15 Volts		286 011 NDND	286 013 NDND	287 011 NDND	287 013 NDND	288 011 NDND	288 013 NDND
0-30 Volts		286 011 NLNL	286 013 NLNL	287 011 NLNL	287 013 NLNL	288 011 NLNL	288 013 NLNL
0-50 Volts		286 011 NTNT	286 013 NTNT	287 011 NTNT	287 013 NTNT	288 011 NTNT	288 013 NTNT
0-100 Volts		286 011 PKPK	286 013 PKPK	287 011 PKPK	287 013 PKPK	288 011 PKPK	288 013 PKPK
0-150 Volts		286 011 PZPZ	286 013 PZPZ	287 011 PZPZ	287 013 PZPZ	288 011 PZPZ	288 013 PZPZ
0-200 Volts				287 011 RLRL	287 013 RLRL	288 011 RLRL	288 013 RLRL
0-300 Volts				287 011 RXRX	287 013 RXRX	288 011 RXRX	288 013 RXRX
15-0-15 Volts		286 012 NDND	286 014 NDND	287 012 NDND	287 014 NDND	288 012 NDND	288 014 NDND
30-0-30 Volts		286 012 NLNL	286 014 NLNL	287 012 NLNL	287 014 NLNL	288 012 NLNL	288 014 NLNL
150-0-150 Volts				287 012 PZPZ	287 014 PZPZ	288 012 PZPZ	288 014 PZPZ

DC VOLTMETERS — 0-1 mA, FOR USE WITH EXTERNAL RESISTORS, RESISTORS NOT INCLUDED (SEE PAGE 29 FOR RESISTORS)

0-500 Volts	43.2 Ohms	286 171 FASF	286 173 FASF	287 171 FASF	287 173 FASF	288 171 FASF	288 173 FASF
0-600 Volts	43.2 Ohms	286 171 FASJ	286 173 FASJ	287 171 FASJ	287 173 FASJ	288 171 FASJ	288 173 FASJ
0-750 Volts	43.2 Ohms	286 171 FASM	286 173 FASM	287 171 FASM	287 173 FASM	288 171 FASM	288 173 FASM

Series 280 DC Ammeters (Taut Band)

Size		1½		2½		3½	
Rating and Scale	Terminal Resistance Ohms ±15%	Horizontal Scale	Vertical Scale	Horizontal Scale	Vertical Scale	Horizontal Scale	Vertical Scale

DC AMMETERS — SELF-CONTAINED

0-50 µA	1,980 Ohms	286 111 CYCY	286 113 CYCY	287 111 CYCY	287 113 CYCY	288 111 CYCY	288 113 CYCY
0-100 µA	990 Ohms	286 111 DRDR	286 113 DRDR	287 111 DRDR	287 113 DRDR	288 111 DRDR	288 113 DRDR
0-200 µA	1,340 Ohms	286 111 EAEA	286 113 EAEA	287 111 EAEA	287 113 EAEA	288 111 EAEA	288 113 EAEA
0-500 µA	235 Ohms	286 111 EMEM	286 113 EMEM	287 111 EMEM	287 113 EMEM	288 111 EMEM	288 113 EMEM
0-1 mA	43.2 Ohms	286 111 FAFA	286 113 FAFA	287 111 FAFA	287 113 FAFA	288 111 FAFA	288 113 FAFA
0-5 mA	3.3 Ohms	286 111 FXFX	286 113 FXFX	287 111 FXFX	287 113 FXFX	288 111 FXFX	288 113 FXFX
0-10 mA	5 Ohms	286 111 GZGZ	286 113 GZGZ	287 111 GZGZ	287 113 GZGZ	288 111 GZGZ	288 113 GZGZ
0-25 mA	2.0 Ohms	286 111 HJHJ	286 113 HJHJ	287 111 HJHJ	287 113 HJHJ	288 111 HJHJ	288 113 HJHJ
0-50 mA	1.0 Ohms	286 111 HYHY	286 113 HYHY	287 111 HYHY	287 113 HYHY	288 111 HYHY	288 113 HYHY
0-100 mA	0.5 Ohms	286 111 JRJR	286 113 JRJR	287 111 JRJR	287 113 JRJR	288 111 JRJR	288 113 JRJR
0-250 mA	0.2 Ohms	286 111 KDKD	286 113 KDKD	287 111 KDKD	287 113 KDKD	288 111 KDKD	288 113 KDKD
0-500 mA	0.1 Ohms	286 111 KMKM	286 113 KMKM	287 111 KMKM	287 113 KMKM	288 111 KMKM	288 113 KMKM
0-1 Amp	0.05 Ohms	286 111 LALA	286 113 LALA	287 111 LALA	287 113 LALA	288 111 LALA	288 113 LALA
0-5 Amp	0.033 Ohms	286 111 LCLC	286 113 LCLC	287 111 LCLC	287 113 LCLC	288 111 LCLC	288 113 LCLC
0-2 Amp	0.025 Ohms	286 111 LELE	286 113 LELE	287 111 LELE	287 113 LELE	288 111 LELE	288 113 LELE
0-3 Amp	0.0167 Ohms	286 111 LJLJ	286 113 LJLJ	287 111 LJLJ	287 113 LJLJ	288 111 LJLJ	288 113 LJLJ
0-5 Amp	0.01 Ohms	286 111 LSLs	286 113 LSLs	287 111 LSLs	287 113 LSLs	288 111 LSLs	288 113 LSLs
50-0-50 µA	990 Ohms	286 112 CYCY	286 114 CYCY	287 112 CYCY	287 114 CYCY	288 112 CYCY	288 114 CYCY
100-0-100 µA	1,340 Ohms	286 112 DRDR	286 114 DRDR	287 112 DRDR	287 114 DRDR	288 112 DRDR	288 114 DRDR
500-0-500 µA	43.2 Ohms	286 112 EMEM	286 114 EMEM	287 112 EMEM	287 114 EMEM	288 112 EMEM	288 114 EMEM
01-0-1 mA	22.2 Ohms	286 112 FAFA	286 114 FAFA	287 112 FAFA	287 114 FAFA	288 112 FAFA	288 114 FAFA
5-0-5 mA	5 Ohms	286 112 FXFX	286 114 FXFX	287 112 FXFX	287 114 FXFX	288 112 FXFX	288 114 FXFX
50-0-50 mA	0.5 Ohms			287 112 HYHY	287 114 HYHY	288 112 HYHY	288 114 HYHY
5-0-5 Amp	0.005 Ohms	286 112 LSLs	286 114 LSLs	287 112 LSLs	287 114 LSLs	288 112 LSLs	288 114 LSLs

DC AMMETERS — SHUNT RATED (LEAD RES. RANGE: .05-.07Ω)*


SONLYE

1 Amp	(0-50 mV) 10 Ohms	286 121 ECLA	286 123 ECLA	287 121 ECLA	287 123 ECLA	288 121 ECLA	288 123 ECLA
5 Amp	(0-50 mV) 10 Ohms	286 121 ECLS	286 123 ECLS	287 121 ECLS	287 123 ECLS	288 121 ECLS	288 123 ECLS
10 Amp	(0-50 mV) 10 Ohms	286 121 ECMT	286 123 ECMT	287 121 ECMT	287 123 ECMT	288 121 ECMT	288 123 ECMT
20 Amp	(0-50 mV) 10 Ohms	286 121 ECNG	286 123 ECNG	287 121 ECNG	287 123 ECNG	288 121 ECNG	288 123 ECNG
50 Amp	(0-50 mV) 10 Ohms	286 121 ECNT	286 123 ECNT	287 121 ECNT	287 123 ECNT	288 121 ECNT	288 123 ECNT
300 Amp	(0-50 mV) 10 Ohms	286 121 ECRX	286 123 ECRX	287 121 ECRX	287 123 ECRX	288 121 ECRX	288 123 ECRX
500 Amp	(0-50 mV) 10 Ohms	286 121 ECSF	286 123 ECSF	287 121 ECSF	287 123 ECSF	288 121 ECSF	288 123 ECSF
1 Amp	(0-100 mV) 20 Ohms	286 121 GBLA	286 123 GBLA	287 121 GBLA	287 123 GBLA	288 121 GBLA	288 123 GBLA
5 Amp	(0-100 mV) 20 Ohms	286 121 GBLS	286 123 GBLS	287 121 GBLS	287 123 GBLS	288 121 GBLS	288 123 GBLS
10 Amp	(0-100 mV) 20 Ohms	286 121 GBMT	286 123 GBMT	287 121 GBMT	287 123 GBMT	288 121 GBMT	288 123 GBMT
20 Amp	(0-100 mV) 20 Ohms	286 121 GMNG	286 123 GMNG	287 121 GMNG	287 123 GMNG	288 121 GMNG	288 123 GMNG
50 Amp	(0-100 mV) 20 Ohms	286 121 GBNT	286 123 GBNT	287 121 GBNT	287 123 GBNT	288 121 GBNT	288 123 GBNT
300 Amp	(0-100 mV) 20 Ohms	286 121 GBRX	286 123 GBRX	287 121 GBRX	287 123 GBRX	288 121 GBRX	288 123 GBRX
500 Amp	(0-100 mV) 20 Ohms	286 121 GBSF	286 123 GBSF	287 121 GBSF	287 123 GBSF	288 121 GBSF	288 123 GBSF

*Shunts not included. See Page 29 for 50mV shunts.

Series 280 AC Voltmeters

AC VOLTMETERS — RECTIFIER TYPE

0-10 Volts		286 051 MTMT	286 053 MTMT	287 051 MTMT	287 053 MTMT	288 051 MTMT	288 053 MTMT
0-15 Volts		286 051 NDND	286 053 NDND	287 051 NDND	287 053 NDND	288 051 NDND	288 053 NDND
0-30 Volts		286 051 NLNL	286 053 NLNL	287 051 NLNL	287 053 NLNL	288 051 NLNL	288 053 NLNL
0-50 Volts		286 051 NTNT	286 053 NTNT	287 051 NTNT	287 053 NTNT	288 051 NTNT	288 053 NTNT
0-100 Volts		286 051 PKPK	286 053 PKPK	287 051 PKPK	287 053 PKPK	288 051 PKPK	288 053 PKPK
0-150 Volts		286 051 PZPZ	286 053 PZPZ	287 051 PZPZ	287 053 PZPZ	288 051 PZPZ	288 053 PZPZ

Series 280 AC Ammeters

AC AMMETERS — RECTIFIER TYPE Δ

0-500 µA	1267 Ohms	286 151 EMEM	286 153 EMEM	287 151 EMEM	287 153 EMEM	288 151 EMEM	288 153 EMEM
0-1 mA	758 Ohms	286 151 FAFA	286 153 FAFA	287 151 FAFA	287 153 FAFA	288 151 FAFA	288 153 FAFA
0-5 mA	196 Ohms	286 151 FXFX	286 153 FXFX	287 151 FXFX	287 153 FXFX	288 151 FXFX	288 153 FXFX
0-10 mA	97 Ohms	286 151 GZGZ	286 153 GZGZ	287 151 GZGZ	287 153 GZGZ	288 151 GZGZ	288 153 GZGZ
0-20 mA	55 Ohms	286 151 HFHF	286 153 HFHF	287 151 HFHF	287 153 HFHF	288 151 HFHF	288 153 HFHF

Δ A 5 AMP AC self-contained 3½" (Type 288) is available as a special, but is not per ANSI C39.1. Contact factory for more information.

Parts and Accessories

AC CURRENT TRANSFORMERS

Current Ratio In Amperes Primary: Secondary	** Catalog number	Accuracy at 60 Hz	Burden VA @ 60Hz	Window diameter
50:5	5RL-500	±2%	1.0	1.56"
75:5	5RL-750	±2%	1.5	1.56"
100:5	5RL-101	±2%	2.0	1.56"
150:5	5RL-151	±1%	5.0	1.56"
200:5	5RL-201	±1%	5.0	1.56"
250:5	5RL-251	±1%	10.0	1.56"
300:5	5RL-301	±1%	12.5	1.56"
400:5	5RL-401	±1%	12.5	1.56"
500:6	5RL-501	±1%	20.0	1.56"
600:5	5RL-601	±1%	25.0	1.56"
750:5	5RL-751	±1%	25.0	1.56"
800:5	5RL-801	±1%	25.0	1.56"
1000:5	5RL-102	±1%	25.0	1.56"
1200:5	5RL-122	±1%	30.0	1.56"

** This is a toroidal type donut transformer with a 24" flying leads. For other styles, ratios and window diameters see transformer catalog 500CTPT-B.

AC VOLTAGE TRANSFORMERS

Voltage Rating primary:secondary	Turns Ratio	1 Phase Catalog No.	Open Delta Catalog No. *	3 Phase Catalog No. **
69.3:120	0.58:1	467-069	469-069	3VT-460-069F
120:120	1:1	467-120	469-120	3VT-460-120F
208:120	1.73:1	467-208	469-208	N/A
240:120	2:1	467-240	469-240	3VT-460-240F
288:120	2.4:1	467-288	469-288	3VT-460-288F
300:120	2.5:1	467-300	469-300	3VT-460-300F
480:120	4:1	467-480	469-480	3VT-460-480F
600:120	5:1	467-600	469-600	3VT-460-600F

*2 transformers in one case. ** 480V & 600V connected line to line. For other ratings. See 500CTPT-B.

RESISTORS

1000 Ohms/Volt, 1 milliampere DC full scale		
*Voltage level	Catalog No.	Dimensions
500 V	2227 01	
600 V	2227 02	
750 V	2227 03	
800 V	2227 04	
1 kV	2227 05	
1.5 kV	2227 06	
2 kV	2227 07	
*Other voltage levels available.		

WINDOW ASSEMBLIES

Size	Big Look	Horizon Line	Stylist Surface mt.	Stylist Window mt.
1 1/2"	9007K17G7700	9007K17G0707	B9015JA	N/A
2 1/2"	9007K17G7701	9007K17G0704	B9016NG	B9016NL
3 1/2"	9007K17G7702	9007K17G0705	B9016PG	B9016PL
4 1/2"	9007K17G7703	9007K17G0706	B9016QG	B9016QL

GASKETS, MASKS, BEZEL KITS

Stylist Surface mount only				
Size	Big Look Gasket	Horizon Line Mask	Metallic Bezel Kit	Black Bezel Kit
1 1/2"	N/A	5203K21P0001	N/A	N/A
2 1/2"	3830K20P7005	5203K18P0001	B9015KX	B9015KY
3 1/2"	3830K20P7003	5203K19P0001	B9015LX	B9015LY
4 1/2"	3830K20P7004	5203K20P0001	B9015MX	B9015MY

INSULATING CAPNUTS

For Stylist meters 10-32 terminals	See below B9015HM
For BL/HL Meters 1/4-28 terminals	See below B9015HN

DC AMMETER SHUNTS - 50 millivolt only

Catalog no.	Rating	Catalog no.	Rating
221501	1 Amp	221514	150 Amp
221502	1.5 Amp	221515	200 Amp
221503	2 Amp	221516	300 Amp
221504	3 Amp	221601	500 Amp
221505	5 Amp	221602	750 Amp
221506	7.5 Amp	221603	1 Kiloamp
221507	10 Amp	221701	1.5 Kiloamp
221508	15 Amp	221702	2 Kiloamp
221509	20 Amp	221703	3 Kiloamp
221510	30 Amp	221704	5 Kiloamp
221511	50 Amp	221705	7.5 Kiloamp
221512	75 Amp	221706	10 Kiloamp
221513	100 Amp		


OTHER ACCESSORIES

Mounting hardwareorder by description of meter
Conduit case for 2 1/2" Big Lookpart no. 2579K10G0700
Antistatic solution in 31/2 oz. bottlepart no. 177001AAAA


Features	New Big Look Horizon Line Panel Meters	Frequency and Expanded Scale Voltmeters	Stylist Series	185 and 280 Edgewise
1. Special Scales Any deviation from standard scale information on catalog listed items constitutes a special scale.....	X	X	X	X
2. Special color on scale (black on white-std) Each special color on scale constitutes one option	X	X	X	X
3. Mirror-back Scale includes knife-edge pointer (DC only)	X ¹	X ¹	X ¹	N/A
4. Nonlisted Rating	X	X	X	X
5. High-sensitivity voltmeters (DC only) Standard sensitivity for DC voltmeters is 1000 ohms/volt (1 milliamp current).....	X	X	X	X
6. Suppressed-zero (DC only) (20% Suppression Max.)	X	N/A	X	X
Suppressed-zero meters have greater error than standard zero-left meters. Normally suppressed-zero units are supplied with zero adjustment. They can be furnished with inoperable zero adjustment upon request.				
7. Offset-zero ratings and scale (DC only)	X	N/A	X	X
8. Nonstandard lead resistance	X	N/A	X	X
Standard two-way shunt lead resistance for shunt-rated ammeters, 50 or 100 millivolt, is 0.065 ohms. Normally these meters can be used with a wide range of lead resistances with only very small additional errors. However, if calibration for a specific value of lead resistance other than 0.065 ohms is required, contact factory.				
9. Calibration for mounting at a specific angle	X	X	X	X
Special calibration not required for meters mounted 0 to 19 degrees from vertical position.				
10. Calibration for specific frequency, 25-400 Hertz. For calibration at frequencies greater than 400 Hertz, refer to factory.....	X	X ³	X	X
11. Special terminal resistance	X	N/A	X	X
Normally nonstandard terminal resistance requirements or close tolerance on terminal resistance should be referred to the factory.				
12. Red Day-Glow pointer	X	X	X	X
13. Black scale with white or red pointer.....	X	X	X	X
14. Special case and cover material (Refer to factory on available materials).	X	X	X	X
15. Anti-glare window	X	X	X	X
16. ±1% FS accuracy at one point on scale. (±2% FS over balance of scale).....	X	N/A	X	X
17. Extra Hardware.....	X	X	X	X
18. Double rated, 3 studs (including scale).....	X	N/A	X	N/A
19. ±1% FS accuracy — all points on scale (DC with Mirror Scale — 3½ and 4½ H.L. & Stylist Only)	X	N/A	X	N/A
20. Tachometer Voltmeter (including scale, pot & special FSV)	X	N/A	X	N/A
21. Lead length compensation pot (Millivoltmeters)	X	N/A	X	N/A
22. UL 1437 Materials (2½-4½" only)	X	X	X	X
23. External Magnetic Shield (2½-4½" only) (Standard on AC Ammeters 20 amps or higher).....	X ²	N/A	N/A	N/A
24. IEC Standard 144 (IP54) (2½ & 3½ B.L. only)	X	X	N/A	N/A

X= Available
N/A = Not Available

Note: 1. Stylist 2½"-4½", HL 3½"-4½"
2. Horizon Line and New Big Look Only
3. Expanded Scale Voltmeter Only



Mounting In Your Present Panel Openings . . .

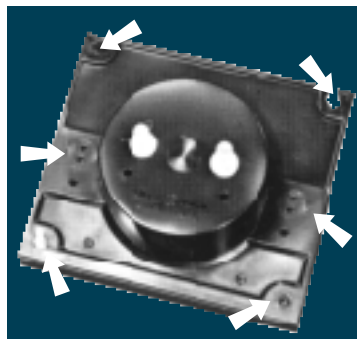

Optional Front-Mounting Configurations

The mounting studs on the New Big Look, Horizon Line and Stylist Series Surface Mount can be ordered to fit your existing panel openings at no extra cost. These cases are interchangeable with a wide variety of competitive instruments. Optional stud-placement configurations are shown at right and a cross-reference of many replacement instruments are listed on the next page. This built-in interchangeability eliminates the need for drawing changes, setups, and redrilling of panels . . . and it solves your instrument replacement problems.

Stud Options	Barrel diameters and mounting hole locations (viewed from front of panel)			
	1½"	2½"	3½"	4½"
Standard New Big Look				
New Big Look Option No. 1				
New Big Look Option No. 2 (Similar to Option No. 1 location — used when 4 studs are wanted)				
Standard Horizon Line				
Horizon Line Option No. 1				
Horizon Line Option No. 2				
Horizon Line Option No. 3 (Similar to Standard location — used when 4 studs are wanted)				
Stylist Surface Standard				
Stylist Surface Option No. 1				

INTERCHANGEABILITY CROSS-REFERENCE (for front-of-panel mounting)

Interchangeable with:	New Big Look				Horizon Line				Stylist Surface Mount			
	1½"	2½"	3½"	4½"	1½"	2½"	3½"	4½"	1½"	2½"	3½"	4½"
Weston 1900	NI	Op1	Op1	S	NI	S	S	S	NI	Op1	Op1	Op1
Weston 201, 301 (square)	NA	Op1	Op1	NA	NA	S	S	NA	NA	Op1	Op1	NA
Weston 201, 301 (round)	NA	S	S	NA	NA	Op2	Op2	NA	CBD	CBD	CBD	CBD
Simpson 25, 125T, etc.	NA	S	S	S	NA	Op2	Op2	S	NA	NI	NI	Op1
Simpson 27, 127, etc.	NA	Op1	Op1	S	NA	S	S	S	NA	Op1	Op1	Op1
Honeywell MS, MM, 45, 55	NI	S	S	S	NI	Op2	Op2	S	NI	NI	NI	Op1
Triplett G, PL, M, 327, 337S, etc.	S	Op1	Op1	S	S	S	S	S	Op1	Op1	Op1	Op1
Triplett 221T, 331S, 351T, 420, etc.	NA	S	S	S	NA	Op2	Op2	S	NA	NI	NI	Op1
API Panelist	NA	NI	Op1	S	NA	NI	S	S	NA	NI	Op1	Op1
Westinghouse G	NA	Op1	NI	NI	NA	S	NI	NI	NA	Op1	NI	NI
Ammon, AM, AP	S	S	S	S	S	Op2	Op2	S	Op1	NI	NI	Op1
Beede, 3-01, 614, 23 etc.	NA	Op1	Op1	S	NA	S	S	S	NA	Op1	Op1	Op1
Hoyt Custom 2035	S	Op1	Op1	S	S	S	S	S	Op1	Op1	Op1	Op1
Hoyt 1035, 680, etc.	NA	S	S	S	NA	Op2	Op2	S	NA	NI	NI	Op1
Ideal 250P, K350P, 460P Imperial	NI	Op1	Op1	S	NI	S	S	S	NI	Op1	Op1	Op1
Ideal 275Pr, 305BR	NI	S	S	S	NI	Op2	Op2	S	NI	NI	NI	Op1
Simpson Wide-View	S	Op1	Op1	S	S	S	S	S	Op1	Op1	Op1	Op1
Modulec S, C	S	Op1	Op1	S	S	S	S	S	S	S	S	S
Modulec PB	CBD	S	S	CBD	CBD	S	S	CBD	S	NA	NA	S
Sun 2830, 3X, 25, etc.	NA	S	S	S	NA	Op2	Op2	S	NA	NI	NI	Op1
Mercer 924	CBD	CBD	CBD	S	CBD	CBD	CBD	S	CBD	CBD	CBD	Op1
Crompton 016 Fiesta	CBD	CBD	S	CBD	CBD	CBD	Op2	CBD	CBD	CBD	NI	CBD
Crompton 210, 223, 225, 227	CBD	Op1	Op2	S	CBD	S	Op3	Op3	CBD	Op1	S	S

Code:


S — Interchangeable with Standard pin configuration.
 Op1 — Interchangeable with Option 1.
 Op2 — Interchangeable with Option 2.

Op3 — Interchangeable with Option 3.
 NI — Not interchangeable

NA — Not applicable (usually means particular size is not manufactured).
 CBD — Cannot be determined.

YOKOGAWA Dimensional Drawings




Fig. 1 New Big Look 1½inch Type 250

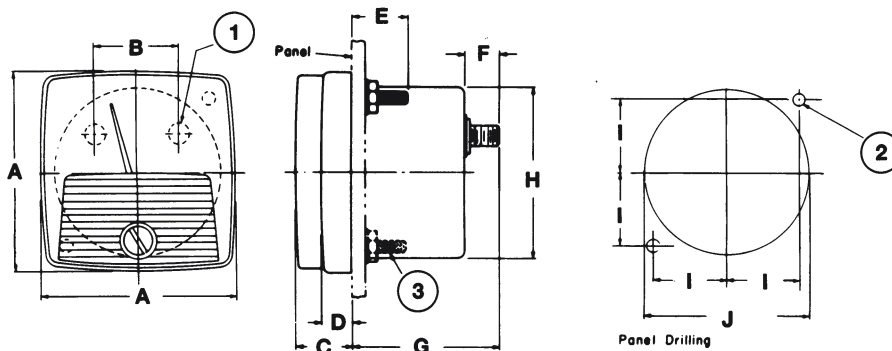

1. No. 8-32 NC 2A (2 term studs)
2. .140" dia. (No. 28) (2 holes)
3. N. 4-40 NC 2A (2 mounting studs)

A	B	C	D	E	F	G	H	I	J
1.76	.75	.5	.25	.5	.38	1.34	1.5	.656	1.53

Fig. 2. New Big Look 2½-inch Types 250 & 254
*2.270 dia. with shield


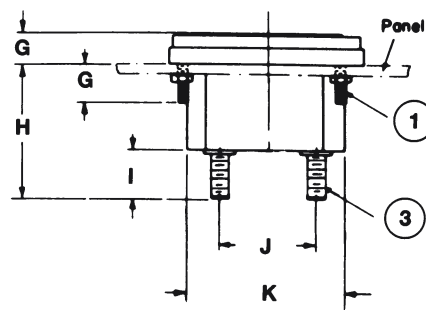
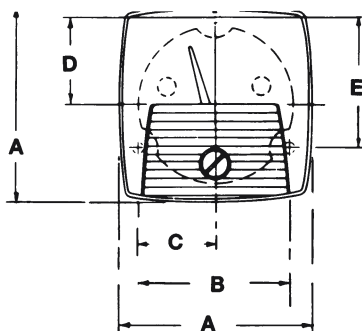


Panel Drilling

A	B	C	D	E	F*	G	H	I	J	K
2.69	2.112	1.056	1.219	1.829	2.17	.5	1.85	.67	1.318	2.15

1. No. 4-40 NC 2A (3 Studs)
2. 140" dia. (No. 28) (3 holes)
3. 1/4" -28 NF 2A thd.

Fig. 3. New Big Look 3½-inch Types 250 & 254
*2.860 dia. with shield


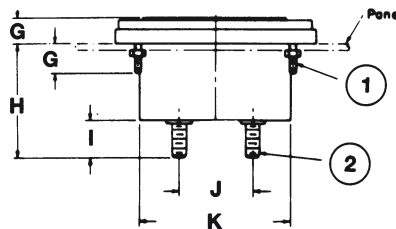
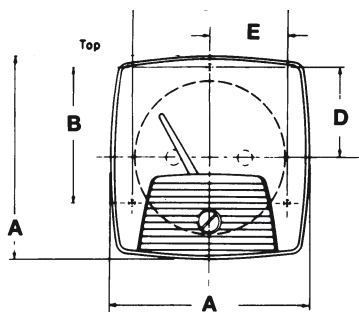


Panel Drilling

A	B	C	D	E	F*	G	H	I	J	K
3.5	2.373	2.74	1.582	1.37	2.72	.5	1.85	.64	1.318	2.7

1. No. 4-40 NC 2A (3 Studs)
2. 1/4" - 28 NF 2A thd.
3. .140" dia. (No. 28 dr.) (3 holes)

Fig. 4. New Big Look 4½-inch Types 250 & 254
*2.860 dia. with shield

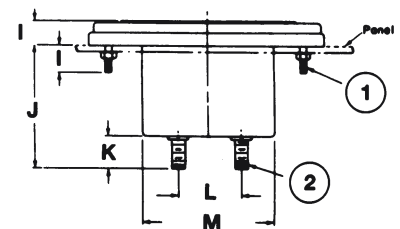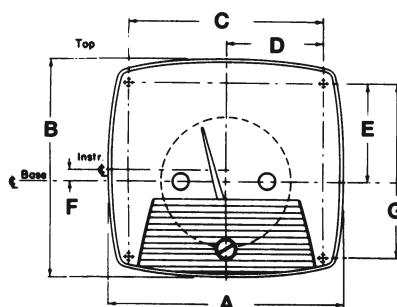


Panel Drilling

A	B	C	D	E	F	G	H*	I	J	K	L	M
4.85	4.41	4	2	2.031	.25	3.562	2.72	.5	1.85	.64	1.318	2.7


1. No. 4-40 NC 2A (4 Studs)
2. 1/4" - 28 NF 2A thd.
3. .140" dia. (No. 28 dr.) (4 holes)

Fig. 5 Horizon Line 1½-inch
Types 251 & 255

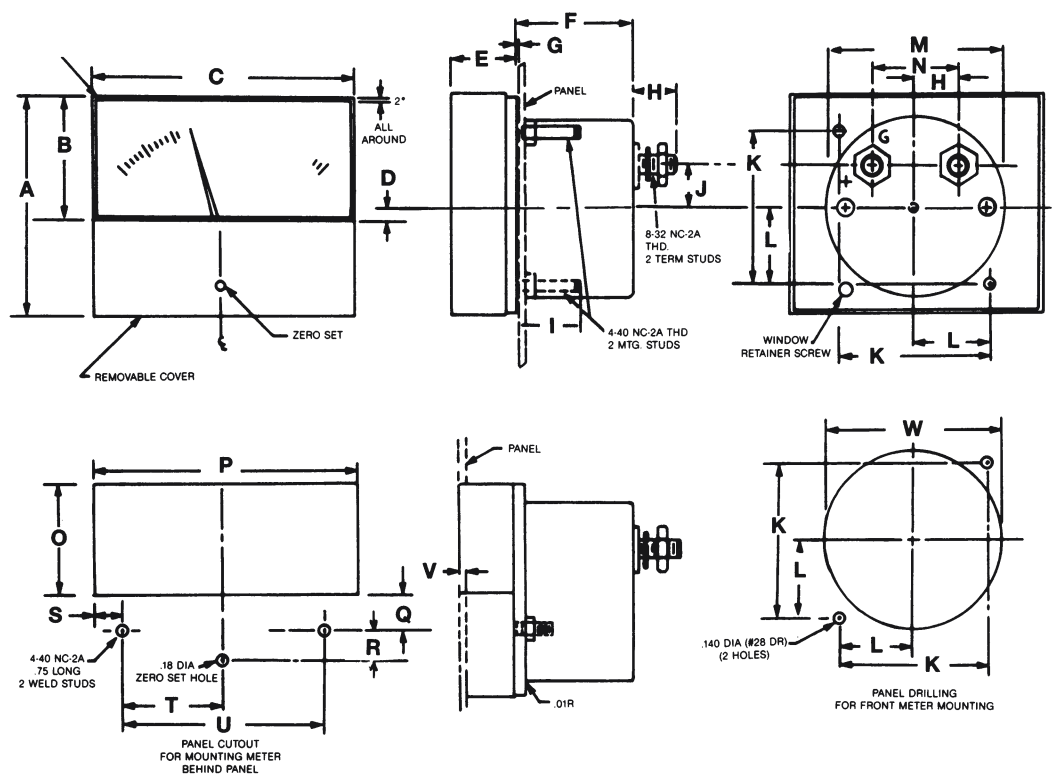

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W
1.86	1.036	2.19	.055	.5	.96	.008	.38	.5	.34	1.312	.656	1.510	.75	1.05	2.18	.356	.175	.24	.85	1.7	.06	1.53

Fig. 6. Horizon Line 2½-inch
Types 251 & 255
*2.270 dia. with shield

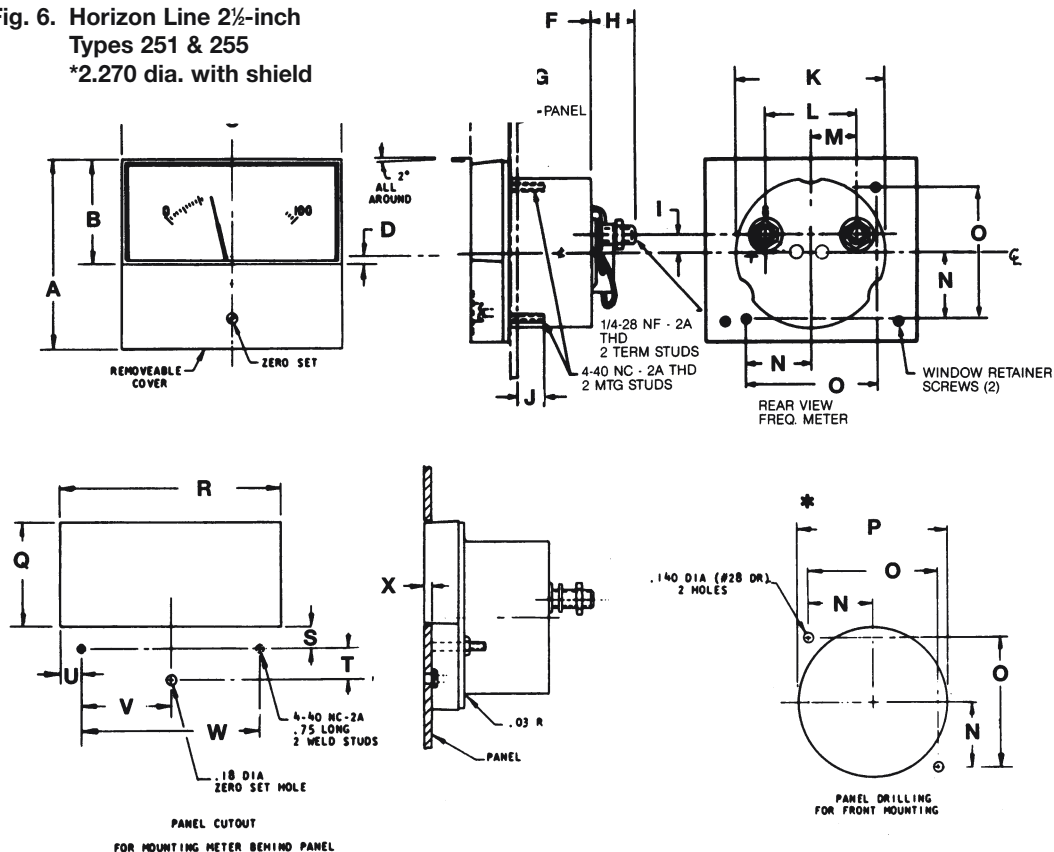


A	B	C	D	E	F
2.66	1.46	3.12	.072	.56	1.18

G	H	I	J	K	L
.088	.63	.26	.5	2.17	1.32

M	N	O	P*	Q	R
.66	.94	1.88	2.19	1.475	3.11

S	T	U	V	W	X
.296	.434	.305	1.25	2.5	.1


Fig. 7. Horizon Line 3½-inch
Types 251 & 255
*2.860 dia. with shield

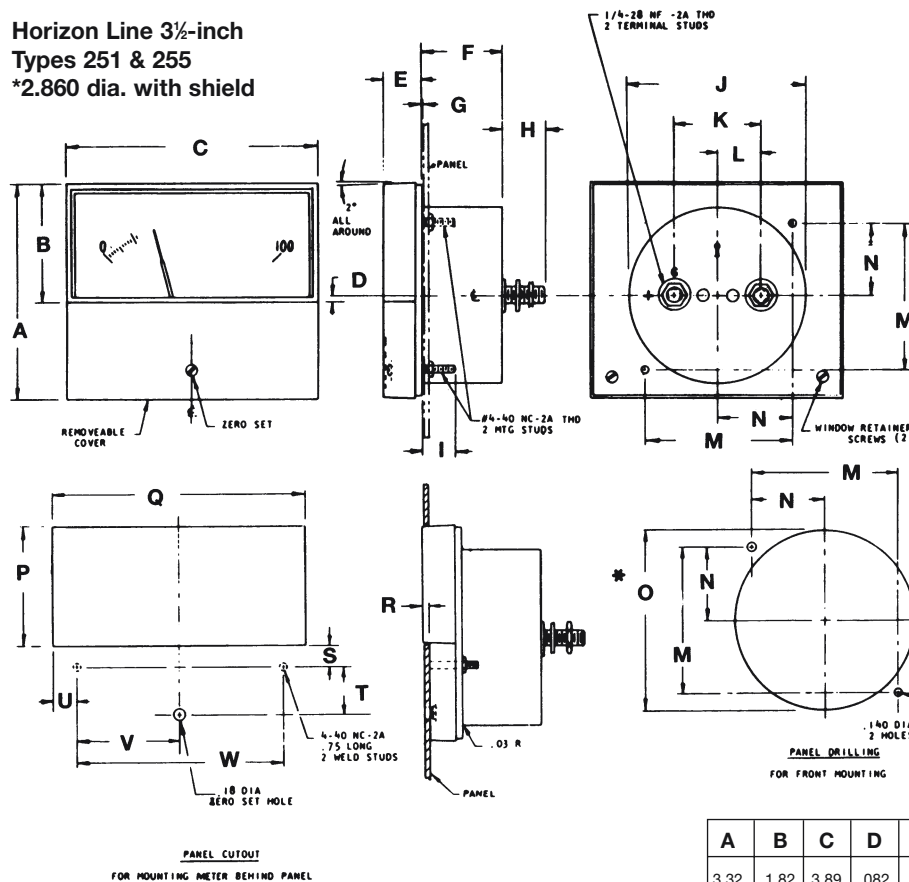

A	B	C	D	E	F	G	H	I	J	K
3.32	1.82	3.89	.082	.58	1.2	.008	.63	.5	2.7	1.32

L	M	N	O*	P	Q	R	S	T	U	V	W
.66	2.25	1.125	2.72	1.836	3.88	.1	.296	.727	.360	1.578	3.156

Fig. 8. Horizon Line 4½-inch
Types 251 & 255
*2.860 dia with shield

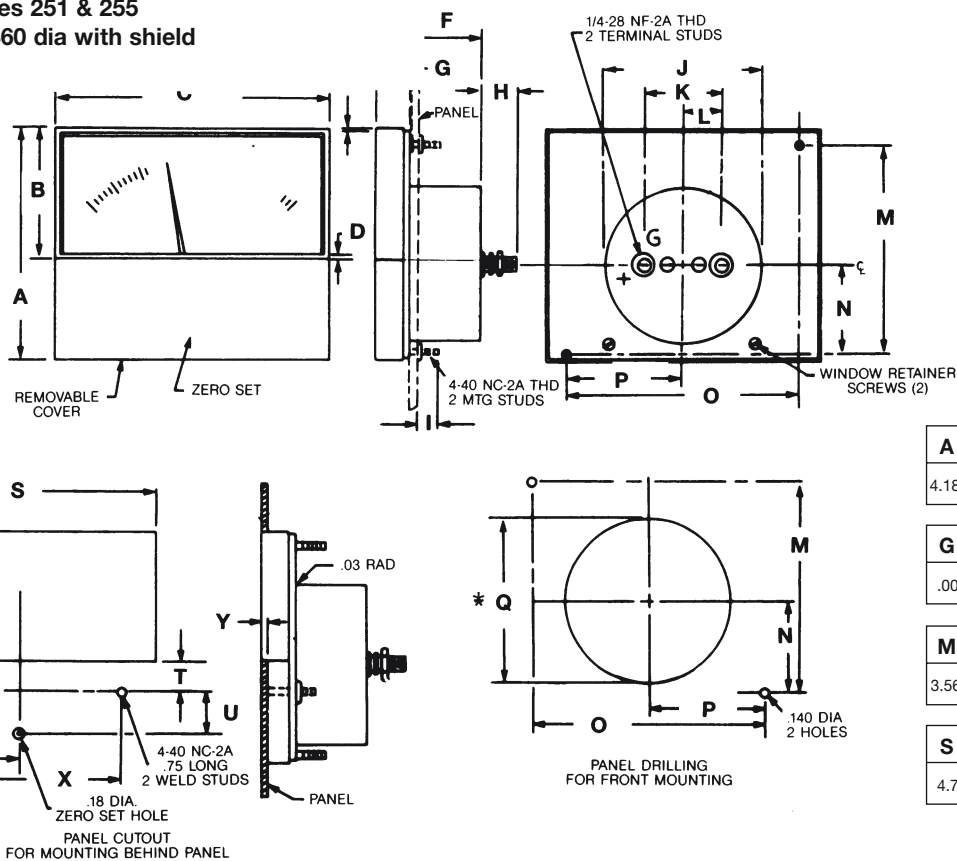


A	B	C	D	E	F
4.18	2.2	4.73	.12	.59	1.2

G	H	I	J	K	L
.006	.63	.5	2.7	1.32	.66

M	N	O	P	Q*	R
3.562	1.531	4	2	2.72	2.216

S	T	U	V	W	X	Y
4.72	.518	.702	.605	1.75	3.5	1

Fig. 9. Stylist Series
Types 260, 261, 264 & 265

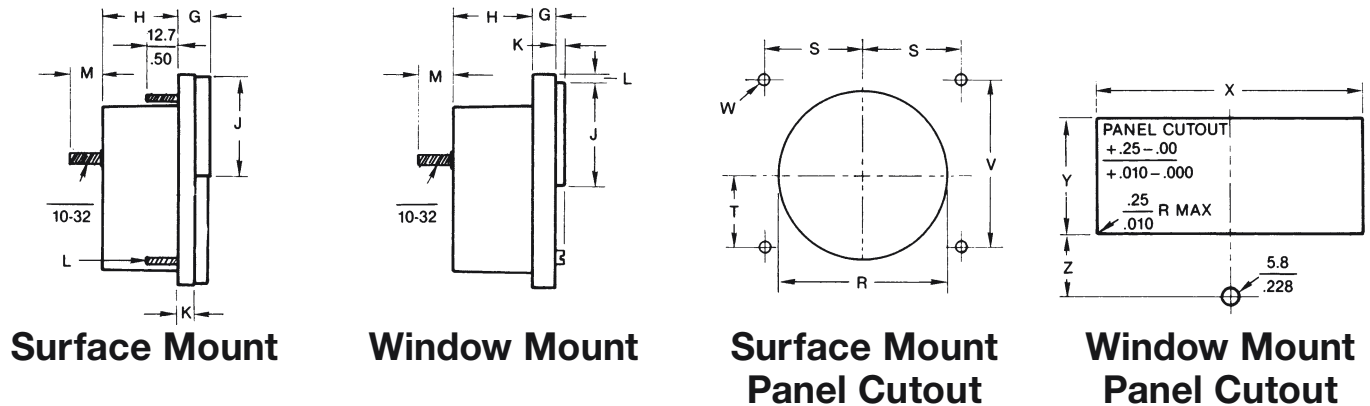


SURFACE MOUNT METERS

		A	B	C	D	E	F	G	H	J	K	L	M	R	S	T	V	W
1½	in.	1.75	2.24	.99	.76	.83	.48	.34	1.30	.87	N/A	4-40	.25	.155	.66	.66	1.31	.125
2½	in.	2.27	2.99	1.33	1.07	1.13	.56	.40	1.30	1.24	N/A	4-40	.50	2.22	.94	.94	1.88	.125
3½	in.	2.87	3.70	1.44	1.33	1.44	.56	.41	1.30	1.55	N/A	4-40	.50	2.82	1.12	1.12	2.25	1.25
4½	in.	3.96	5.10	1.74	1.33	1.74	.56	.51	1.26	2.20	N/A	4-40	.50	2.82	2.00	1.54	3.56	.125


WINDOW MOUNT METERS

		A	B	C	D	E	F	G	H	J	K	L	M	X	Y	Z
2½	in.	2.29	3.01	1.35	1.06	1.15	.56	.295	1.30	1.260	.145	.06	.50	2.900	1.270	.633
3½	in.	2.90	3.73	1.45	1.33	1.45	.56	.32	1.30	1.585	.145	.07	.50	3.610	1.595	.804
4½	in.	4.60	5.18	1.79	1.33	1.79	.56	.37	1.26	2.335	.145	.09	.50	5.020	2.345	.856

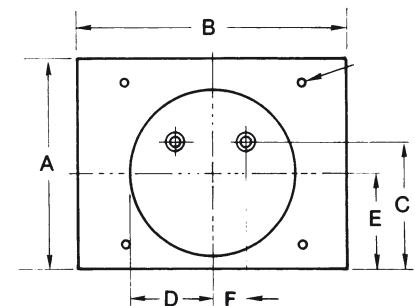


Surface and Window Mount Meters rear view (combined)

Fig. 10. Bezel Mounts of Surface Mount Stylist Meters

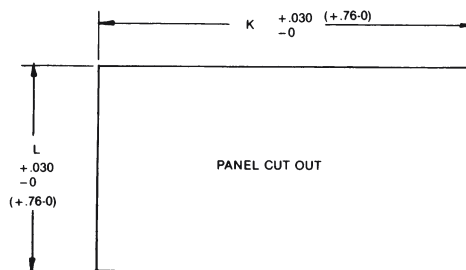

		A	B	C	D	E
2½	in.	.13	1.87	.57	1.78	3.15
3½	in.	.14	1.89	.59	2.14	3.85
4½	in.	.12	2.05	.75	2.84	5.24

		F	G	H	J	K	L
2½		2.30	.64	.79	1.74	3.00	1.594
3½		2.94	.72	1.07	2.30	3.718	2.156
4½		4.05	1.13	1.42	2.99	5.126	2.843

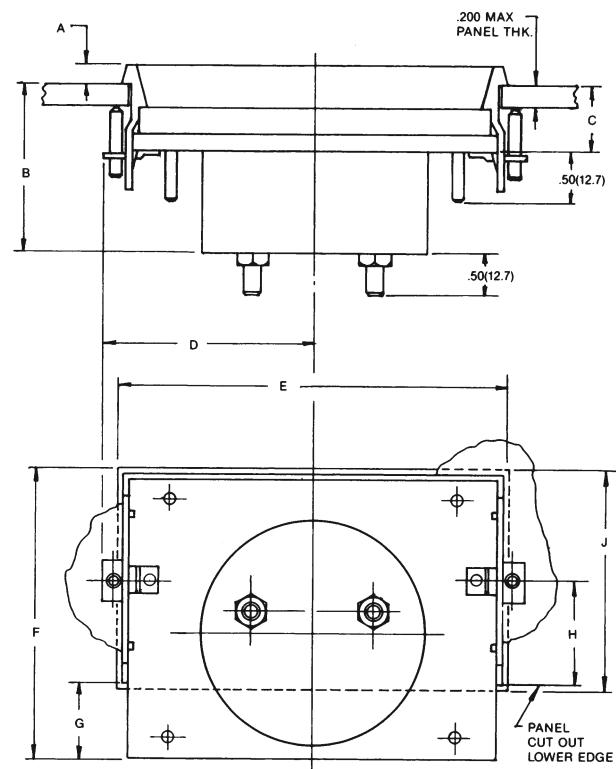

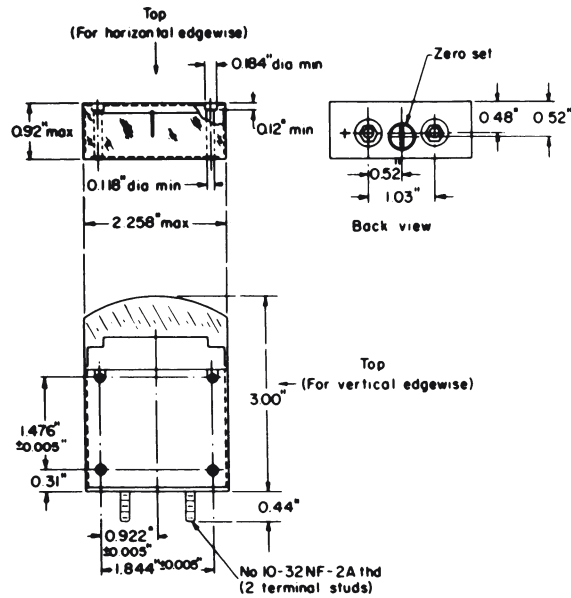


Fig. 11. Outline dimensions for Type 185 meters

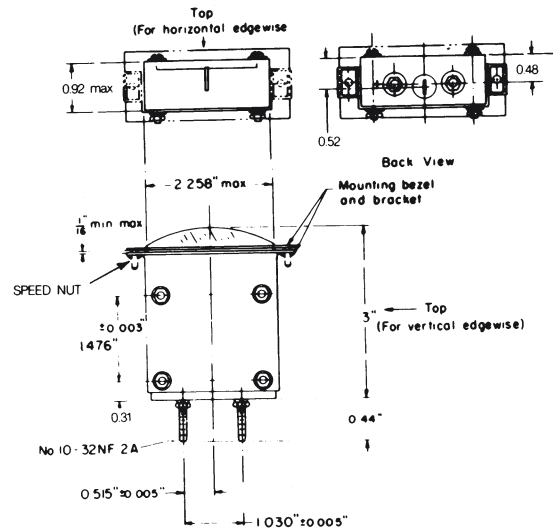


Fig. 12. Outline dimensions for Type 185 meter, with bezel and mounting bracket. See Fig. 15 & 16 below

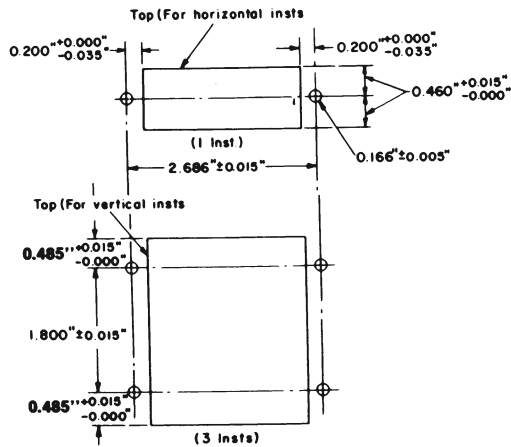


Fig. 13. Panel cutout dimensions for mounting 1 or 3 meters, with bezels and mounting brackets

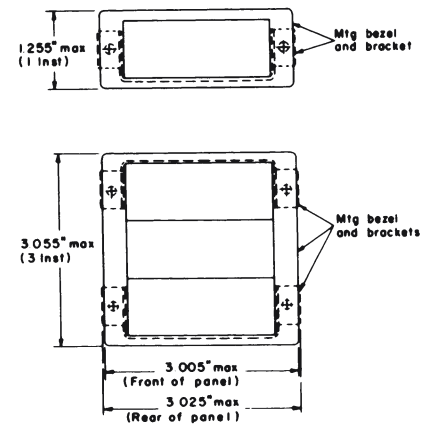


Fig. 14. Dimensions of bezels

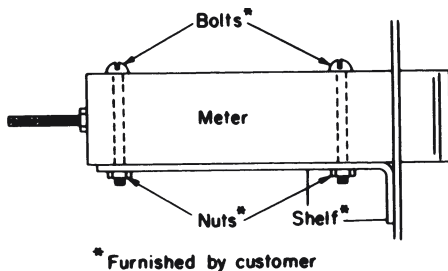


Fig. 15. Mounting of Type 185 meter on back of panel equipment

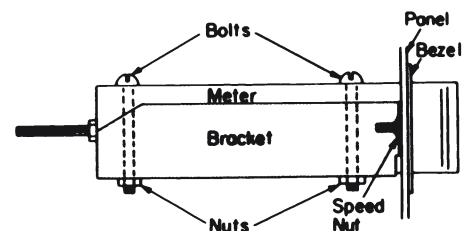


Fig. 16. Type 185 meter with bezel mounting bracket and hardware

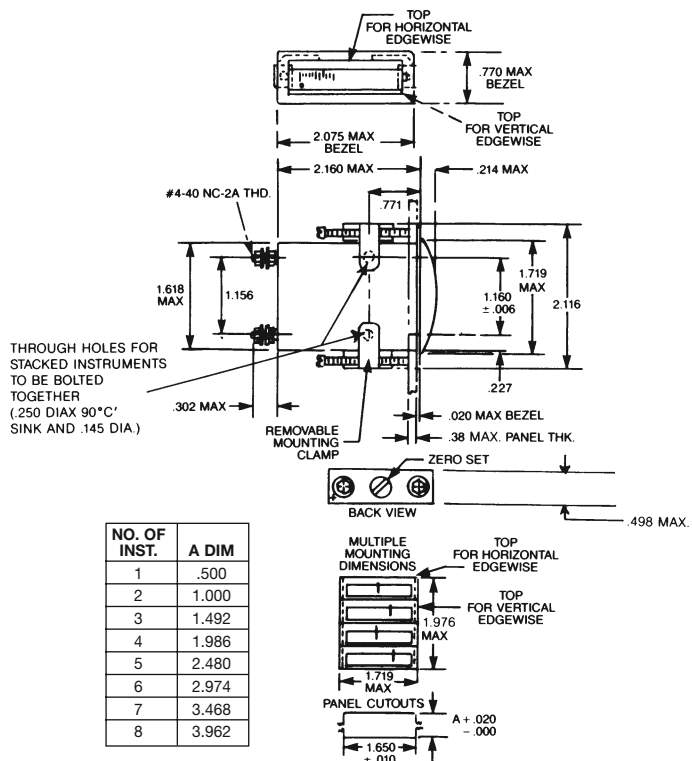


Fig. 17. Outline Dimensions for 1½-inch Type 286 meters

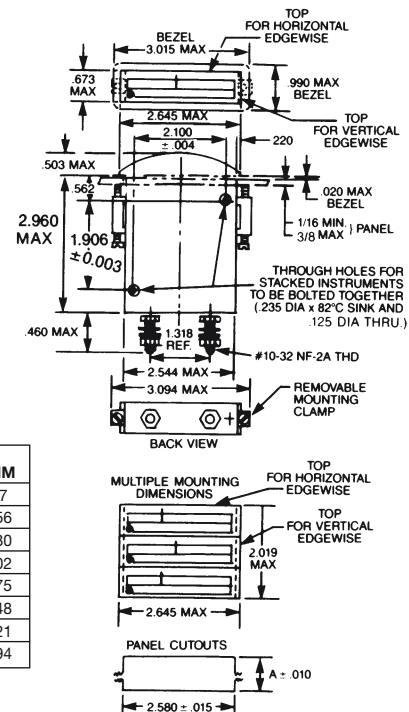


Fig. 18. Outline Dimensions for 2½-inch Type 287 meters

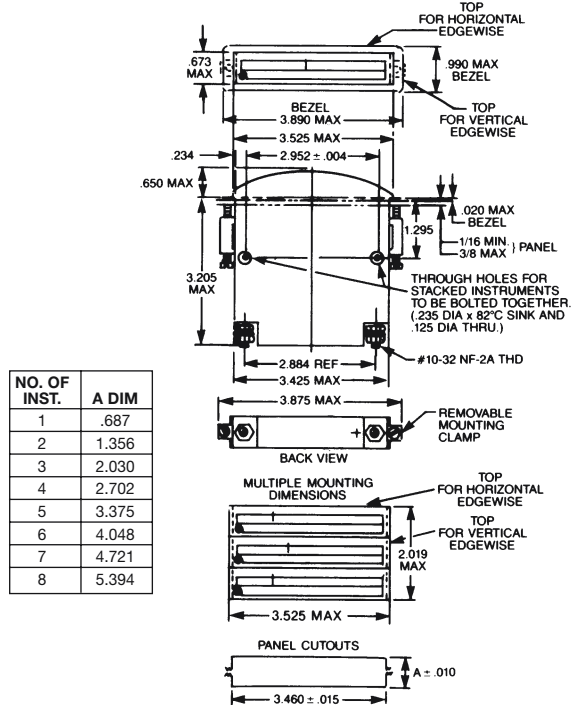


Fig. 19. Outline Dimensions for 3½-inch Type 288 meters

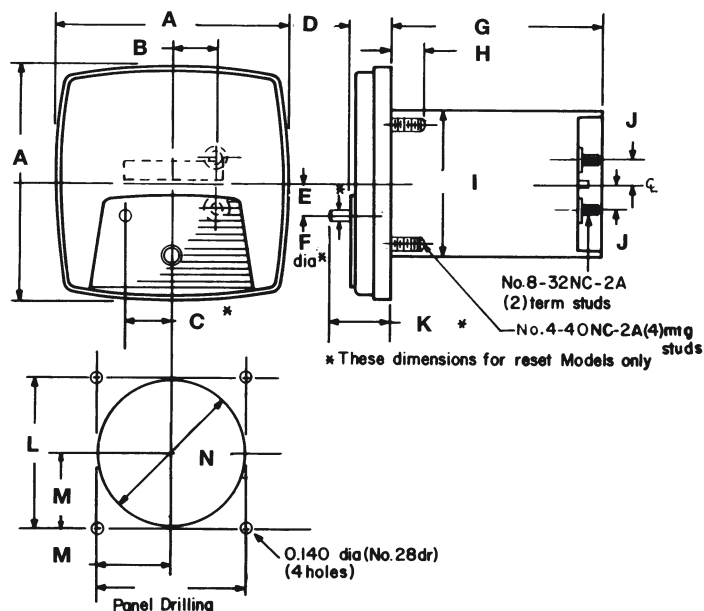


Fig. 20. New Big Look 2½ & 3½-inch Type 240



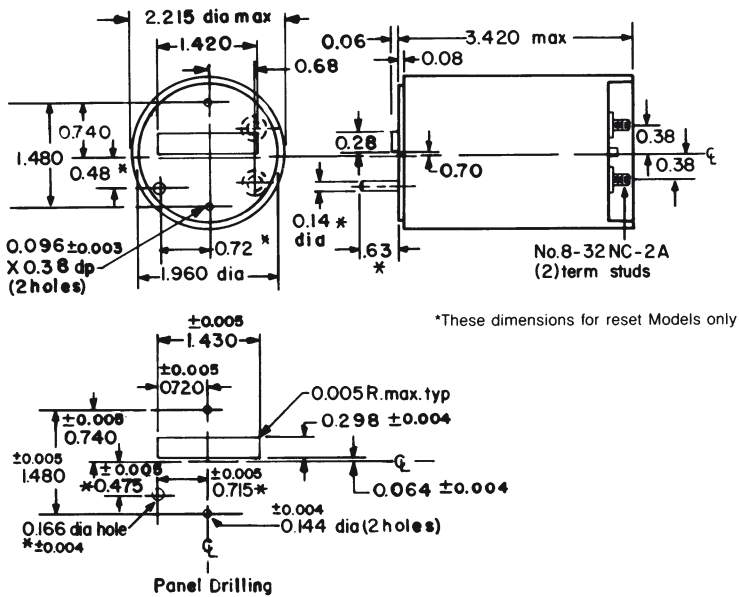


Fig. 21. Type 240 Back-of-panel model

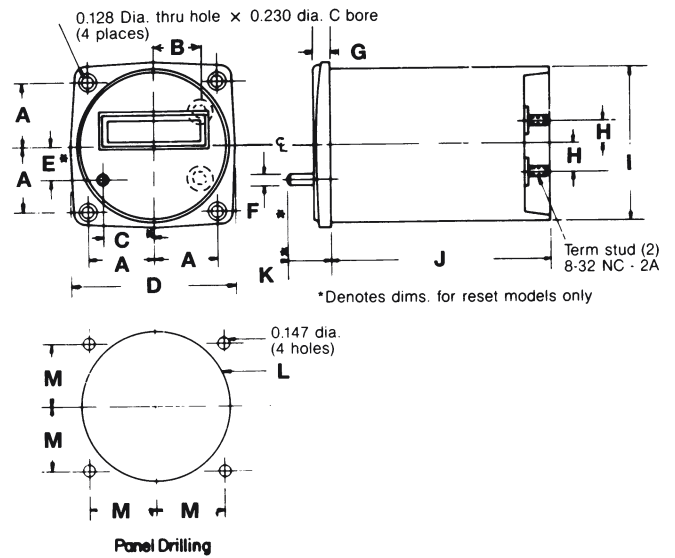

SIZE DIM	A	B	C	D	E	F	G	H	I	J	K	L	M
2 1/2 BL	.94	.68	.72	2.38	.48	.14	.25	.38	2.215	3.286	.76	2.22	.94
3 1/2 BL	1.12	.68	.72	3.0	.48	.14	.25	.38	2.215	3.286	.76	2.22	1.125

Fig. 22. Type 240 square case

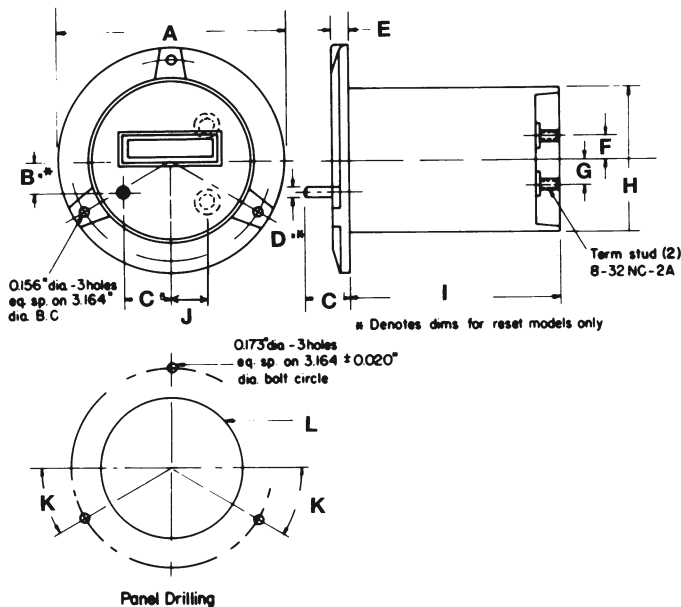

SIZE DIM	A	B	C	D	E	F	G	H	I	J	K	L
2 1/2 BL	2.68	.48	.72	.14	.21	.38	.38	2.215	3.33	.68	30°	2.22
3 1/2 BL	3.51	.48	.72	.14	.22	.38	.38	2.215	3.32	.68	30°	2.22

Fig. 23. 2 1/2-3 1/2-inch Type 240 round case

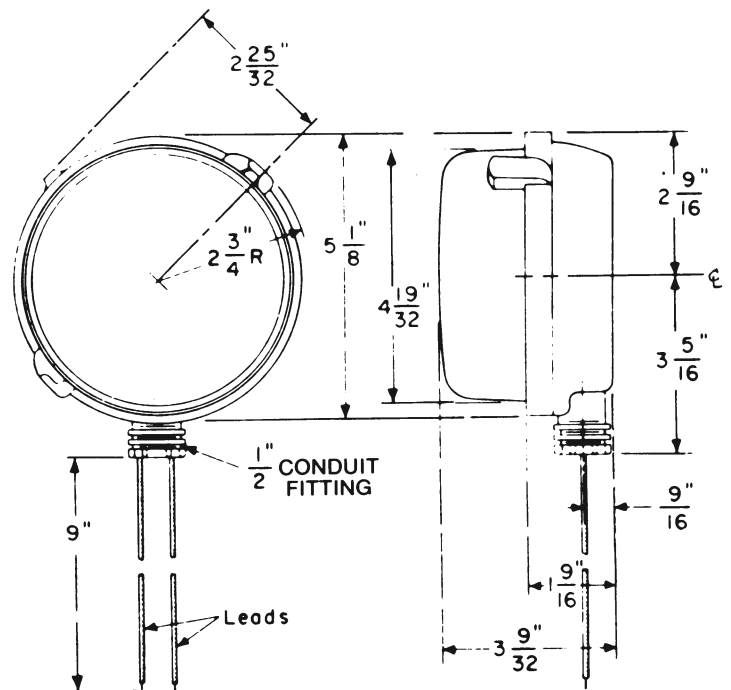


Fig. 24. Type 240 conduit-mounted case

PANEL METERS



Elapsed Time Meters



New Big Look Panel Meters



Horizon Line Panel Meters



Stylist Panel Meters



Type 185 Edgewise Meters



Type 280 Thin Edgewise Meters

YOKOGAWA ◆

Yokogawa Corporation of America

2 Dart Road

Newnan, GA 30265

770/253-7000 • 770/251-2088 (FAX)

800/258-2552 x 575

www.yca.com

Represented By: