

CURRENT TRANSFORMER

Model 3P43

Window Diameter 3.00"

APPLICATION:
3 phase relay, metering and motor overload protection.

FREQUENCY:
50-400 Hz.

INSULATION LEVEL:
600 Volt, 10 kv BIL full wave.

REGULATORY AGENCY APPROVALS







E93779



LR89403

Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

- Terminals are brass studs No.8-32 with one flatwasher, lockwasher and regular nut.
- Flexible leads UL 1015 105 C., CSA approved, #16 AWG, 24" long are available.
- Approximate weight 8.5 lbs.

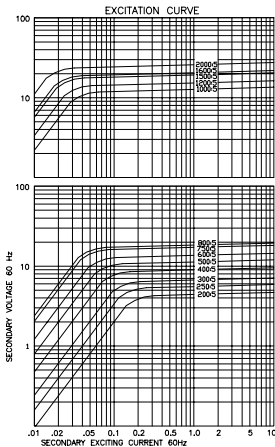

CATALOG NUMBER	CURRENT RATIO	ANSI METERING CLASS AT 60 Hz					SECONDARY WINDING RESISTANCE (OHMS @ 75°C.)
		B0.1	B0.2	B0.5	B0.9	B1.8	
3P43-201	200:5	0.6	1.2	2.4	—	—	0.049
3P43-251	250:5	0.3	0.6	1.2	2.4	—	0.077
3P43-301	300:5	0.3	0.6	1.2	2.4	—	0.073
3P43-401	400:5	0.3	0.3	0.6	1.2	—	0.123
3P43-501	500:5	0.3	0.3	0.6	0.6	1.2	0.122
3P43-601	600:5	0.3	0.3	0.3	0.6	1.2	0.184
3P43-751	750:5	0.3	0.3	0.3	0.6	1.2	0.182
3P43-801	800:5	0.3	0.3	0.3	0.6	1.2	0.246
3P43-102	1000:5	0.3	0.3	0.3	0.3	0.6	0.307
3P43-122	1200:5	0.3	0.3	0.3	0.6	1.2	0.315
3P43-152	1500:5	0.3	0.3	0.3	0.3	1.2	0.395
3P43-162	1600:5	0.3	0.3	0.3	0.3	0.6	0.428
3P43-202	2000:5	0.3	0.3	0.3	0.3	0.6	0.532